

**M12 fem. 0° D-cod./RJ45 Push Pull 0° shielded AIDA**

PUR 1x4xAWG22 shielded gn UL/CSA+drag ch. 0.5m

Ethernet CAT5e

Product fulfills requirements according to UN/ECE R118

Female straight – male straight

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

M12 – RJ45PP, 4-pole

D-coded

shielded

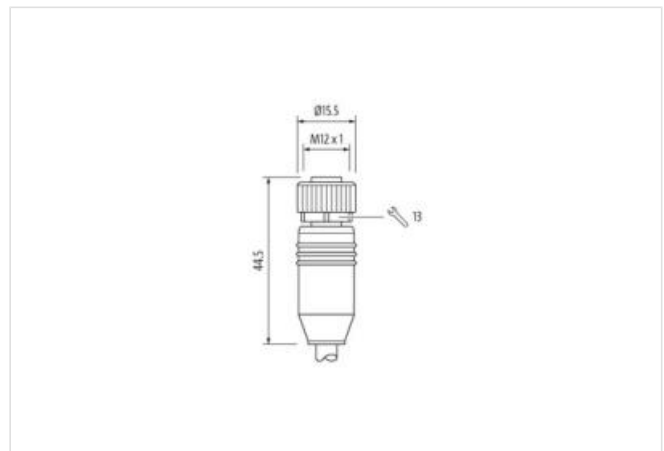
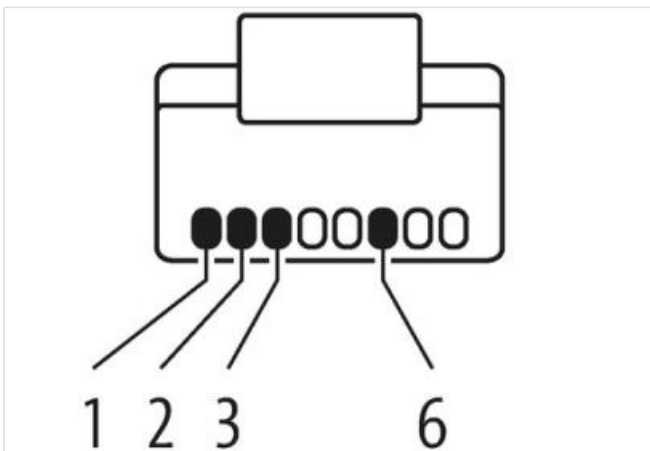
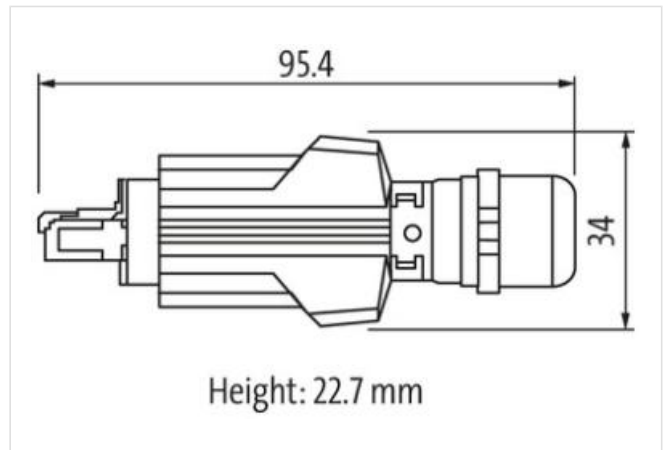
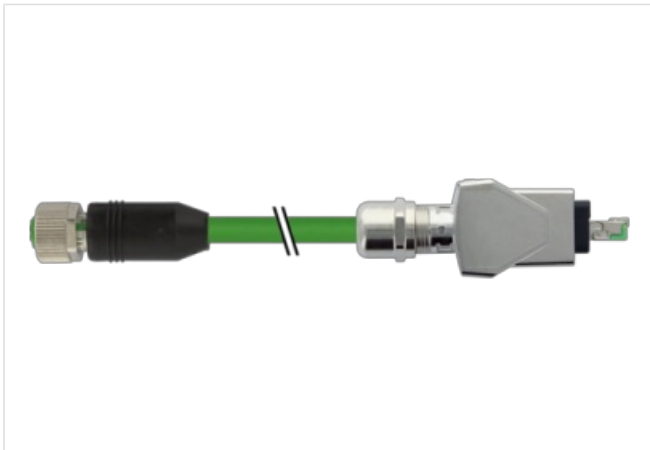
8-pole partly used



Push Pull

with cable sleeves


maximum length for channel transmission corresponds to 100 mm

Further cable lengths on request.

[Link to Product](#)**Illustration**

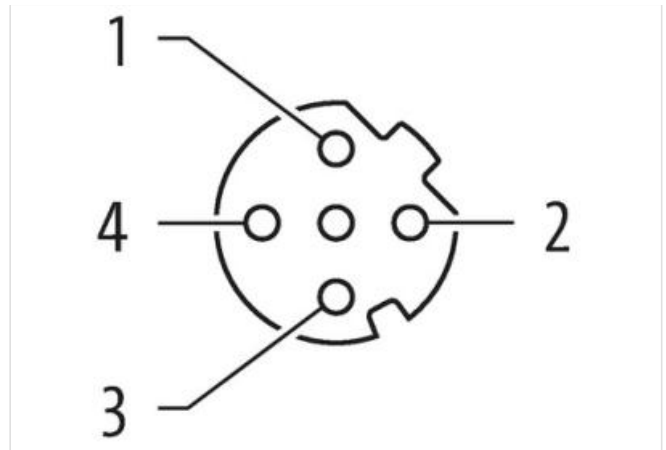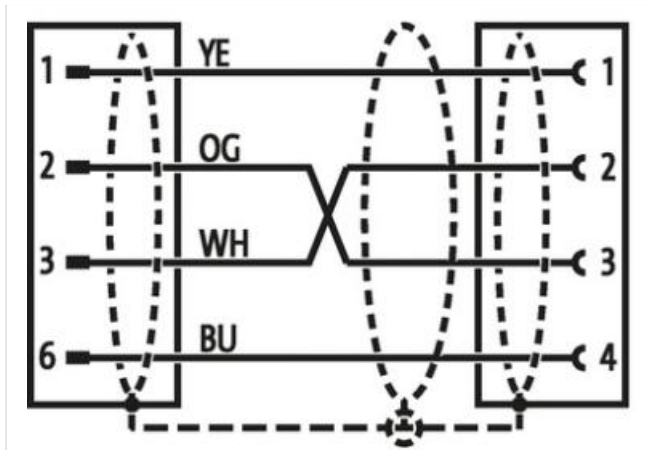

Product may differ from Image



|                                     |                   |
|-------------------------------------|-------------------|
| Cable length                        | 0,5 m             |
| <b>Side 1</b>                       |                   |
| Tightening torque                   | 0,6 Nm            |
| Mounting method                     | inserted, screwed |
| Family construction form            | M12               |
| Thread                              | M12 x 1           |
| Cable outlet                        | straight          |
| Coding                              | D                 |
| No. of poles                        | 4                 |
| Width across flats                  | SW13              |
| Degree of protection (EN IEC 60529) | IP65, IP66K, IP67 |

|                                     |            |
|-------------------------------------|------------|
| <b>Side 2</b>                       |            |
| Mounting method                     | pluggable  |
| Family construction form            | RJ45       |
| Cable outlet                        | straight   |
| No. of poles                        | 4          |
| Degree of protection (EN IEC 60529) | IP65, IP67 |

|                        |               |
|------------------------|---------------|
| <b>Commercial data</b> |               |
| ECLASS-6.0             | 27061801      |
| ECLASS-6.1             | 27060307      |
| ECLASS-7.0             | 27060307      |
| ECLASS-8.0             | 27060307      |
| ECLASS-9.0             | 27060307      |
| ECLASS-10.1            | 27060307      |
| ECLASS-11.1            | 27060307      |
| ECLASS-12.0            | 27060307      |
| ETIM-5.0               | EC002599      |
| customs tariff number  | 85444290      |
| GTIN                   | 4048879876803 |
| Packaging unit         | 1             |

|                                 |      |
|---------------------------------|------|
| <b>Electrical data   Supply</b> |      |
| Operating voltage DC max.       | 60 V |

Current operating per contact max. 1,5 A

#### Industrial communication

Transfer parameters CAT5e, Class D (ISO/IEC 11801)  
Data transmission rate max. 100 MBit/s

#### Device protection | Electrical

Pollution Degree 3  
Rated surge voltage 1 kV  
Material group (IEC 60664-1) I

#### Mechanical data

Contour for corrugated hose without

#### Mechanical data | Material data

Coating locking Nickeled  
Locking material Zinc die-casting

#### Mechanical data | Mounting data

Mounting method inserted, screwed, Shaking protection

#### Environmental characteristics | Climatic

Operating temperature min. -25 °C  
Operating temperature max. 70 °C  
Additional condition temperature range depending on cable quality

#### Important installation notes

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  
Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

#### Conformity

Product standard DIN EN 61076-2-101 (M12)

#### Installation | Cable

|  |  |
|--|--|
| wire arrangement                         | white, yellow, blue, orange                                    |
| Cable identification                     | 796  |
| Jacket Color                             | green  |
| Type of Certificate                      | cURus  |
| Amount stranding                         | 1  |
| Stranding                                | 4 wires around Core filler twisted                             |
| Cable shielding (type)                   | copper braid, tinned   |
| Cable shielding (coverage)               | 85 %   |
| Banding                                  | Fleece, Foil   |
| Filler                                   | yes  |
| wire arrangement                         | white, yellow, blue, orange                                    |
| Cable weight                             | 69,3 g/m   |
| Material jacket                          | PUR  |
| Shore hardness jacket                    | 89 Shore A   |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket)                  | 6,7 mm   |
| Tolerance outer diameter (sheath)        | ± 5 %  |
| Material inner jacket                    | FRNC   |
| Color (inner jacket)                     | natur  |
| Material wire insulation                 | PE   |
| Amount wires                             | 4  |
| Outer diameter insulation                | 1,4 mm   |
| Outer diameter tolerance core insulation | ± 5 %  |
| Shore hardness wire insulation           | 65 Shore D   |
| Ingredient freeness wire insulation      | lead-free, CFC-free, halogen-free                              |

|   |  |
|---|--|
| Amount strands (wire)                             | 7  |
| Diameter of single wires                          | 22 AWG   |
| Conductor crosssection (wire)                     | 22 AWG   |
| Material conductor wire                           | Stranded copper wire, bare                           |
| Nominal voltage AC max.                           | 300 V  |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,8 A  |
| Characteristic impedence                          | 100 $\Omega$ $\pm$ 15 % @ 100 MHz                    |
| Electrical resistance line constant wire          | 55 $\Omega$ /km @ 20 °C                              |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s  |
| Electrical capacity line constant (wire - wire)   | 50000 pF/km  |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s  |
| AC withstand voltage (wire - shield)              | 2 kV @ 60 s  |
| Isolation resistance                              | 5000 M $\Omega$ $\times$ km                          |
| Min. operating temperature (static)               | -40 °C   |
| Max. operating temperature (fixed)                | 80 °C  |
| Operating temperature min. (dynamic)              | -30 °C   |
| Operating temperature max. (dynamic)              | 70 °C  |
| Flame resistance                                  | IEC 60332-2-2   UL 1581 § 1090   UL 1581 § 1100 FT2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)                            | 5 $\times$ Outer diameter                            |
| Bending radius (dynamic)                          | 12 $\times$ Outer diameter                           |
| No. of bending cycles (C-track)                   | 3 Mio. @ 25 °C                                       |
| Traversing distance (C-track)                     | 5 m @ 25 °C  |
| Travel speed (C-track)                            | 3,3 m/s @ 25 °C                                      |
| No. of torsion cycles                             | 1 Mio. 25 °C   |
| Torsion stress                                    | $\pm$ 180 °/m  |