

MOTOR SUPPRESSOR

RC, 3x575VAC/5,5kW



3× 575 V AC

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

[Link naar het product](#)

Afbeelding

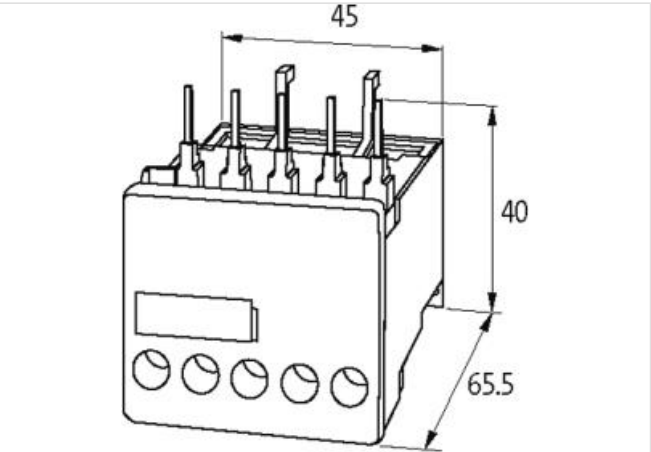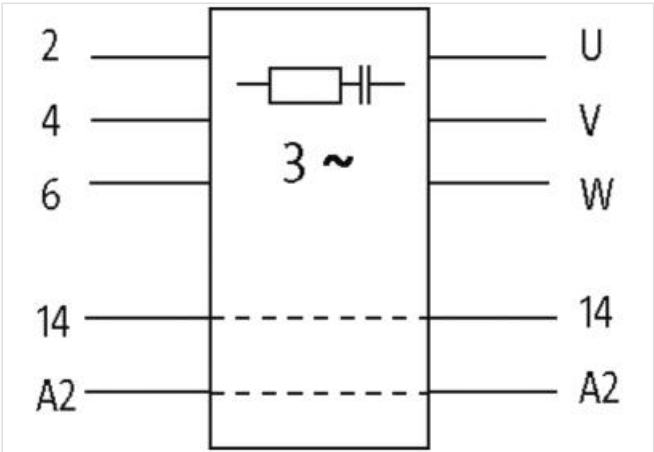

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
-------------	----------

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC000197
----------	----------

Douane tarief nummer	85363010
----------------------	----------

GTIN	4048879018869
------	---------------

Verpakkingseenheid	1
--------------------	---

Compatibility | Compatible with

Appropriate contactors	3 RT 20, Siemens 3 RT 10
------------------------	--------------------------

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	575 V
------------------	-------

Installation | Connection

Connection information	fits directly into SIRIUS contactors, size 00
------------------------	---

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Height	40 mm
--------	-------

Width	45 mm
-------	-------

Depth	65,5 mm
-------	---------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------