

IN: 115/230+/-15VAC OUT: :24V/1ADC

Link to Product

MURR
ELEKTRONIK

Art.Nr. 85351

PRE 230 V / 400 V
0.87 A / 0.58 A
50/60 Hz

SEC 24 V DC
40 W S.A. max.
50 W S.A. max.
ground, SELV

10 A

CE

UL US



LISTED
250V

EN 60742
EN 61558-2-6

10V 0 -10V 230V/400V

MEN 5

10V 0 -10V 230V/400V

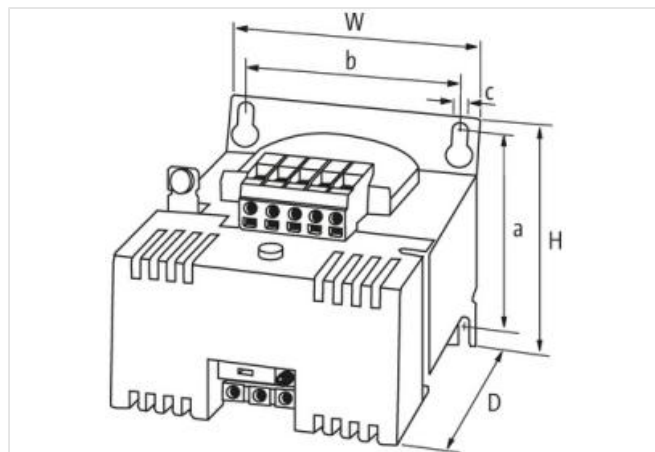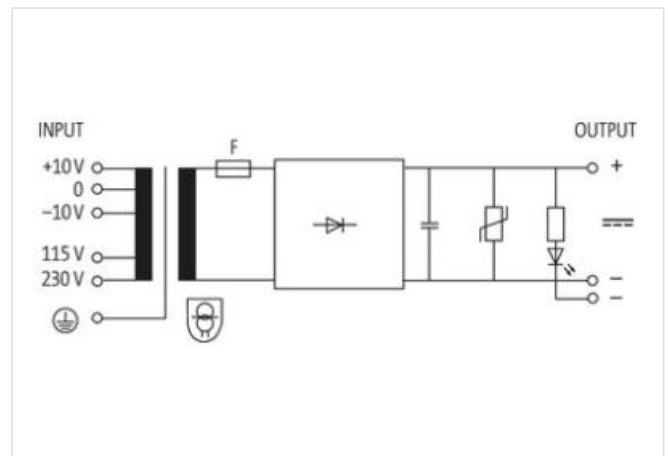

Product may differ from Image

ECLASS-6.0	27049002
ECLASS-7.0	27049002
ECLASS-8.0	27049002
ECLASS-9.0	27040701
ETIM-5.0	EC002540
customs tariff number	85044095
GTIN	4048879065726
Packaging unit	1

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-25

Murrelektronik B.V. | Takkebijsters 3 | 4817 BL Breda | Fon 085-22 20 282 | Fax 085-22 20 283 | shop@murrelektronik.nl | shop.murrelektronik.nl

Security level SELV

Electrical data | Supply

Power frequency 50 ... 60 Hz

Electrical data | Input

Fuse protection 1 primary side external 0,8 A @115 V AC

Fuse protection 2 primary side external 0,4 A @230 V AC

Characteristic back-up fuse Inertia

Input voltage 1 AC 115 V

Input voltage 1 AC min. 105 V

Input voltage 1 AC max. 125 V

Input voltage 2 AC 230 V

Input voltage 2 AC min. 220 V

Input voltage 2 AC max. 240 V

Input current at input voltage 1 AC 0,54 A

Input current at input voltage 2 AC 0,27 A

Electrical data | Output

Fuse protection secondary side external 3 A

Output suppression LED, Screening capacitor, VDR

Output voltage DC 24 V

Output voltage adjustable no

Output current max. 1,5 A

Type of secondary fuse Flat fuse FKS

Ripple max. 5 %

Mechanical data | Mounting data

Mounting method geschnappt

Suitable for mounting type Tragschiene TH35-15, Schlüssellochaufhängung, (EN 60715)

Mounting dimension a 47,5 mm

Mounting dimension b 56 mm

Mounting dimension c 4,8 mm

Height 64 mm

Width 78 mm

Depth 120 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C

Derating from 40 °C

Conformity

Product standard EN 61558-2-6, EN 62041 category I

EMC EN 55011 B, EN 61000-3-2

Connection type 3

Connection Screw terminals SK

Family construction form terminal

Gender female

Color contact carrier metallic

No. of poles 1

PIN 1 PE

Connection Screw terminals SK

Family construction form terminal

Gender female

Color contact carrier green

No. of poles 3

PIN 1	+
PIN 2	-
PIN 3	-
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	5
PIN 1	+ 10 V
PIN 3	- 10 V
PIN 4	115 V
PIN 5	230 V