

## 7/8" MALE 0° BUS-FERRULE RESISTOR

Terminating resistor

Male

7/8" (5-pole)

screw fixing


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

## **Link to Product**

## Illustration



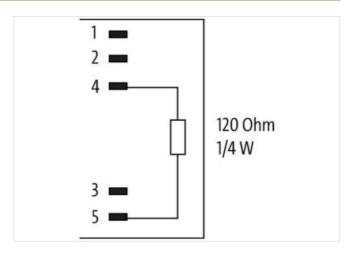



Product may differ from Image



Commercial data		
ECLASS-6.0	27279218	
ECLASS-7.0	27279218	
ECLASS-8.0	27279218	
ECLASS-9.0	27060311	
ETIM-5.0	EC001855	
customs tariff number	85332900	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-26



GTIN	4048879134699
Packaging unit	1
Electrical data   Supply	
Current operating per contact max.	8 A
Device protection   Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Environmental characteristics   Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	80 °C