

**M8 male 0° / M12 female 90° A-cod. F&B**

PVC 3x0.25 gy UL/CSA 2.5m

F&amp;B

Male straight – female 90°

M8 – M12, 3-pole

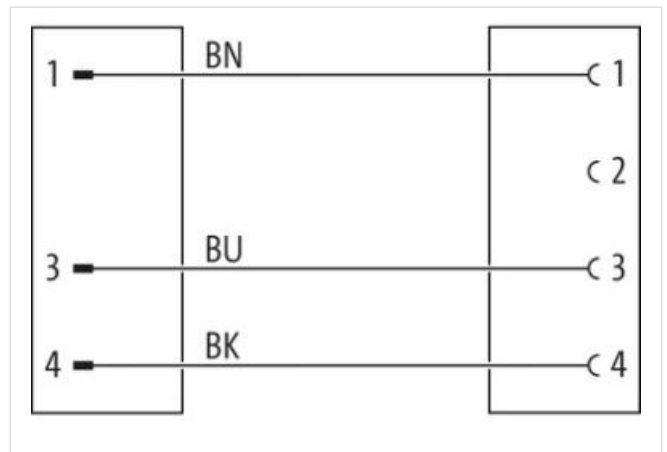
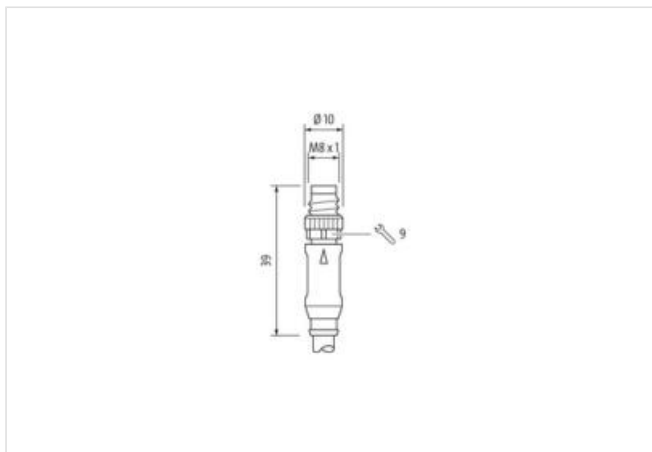
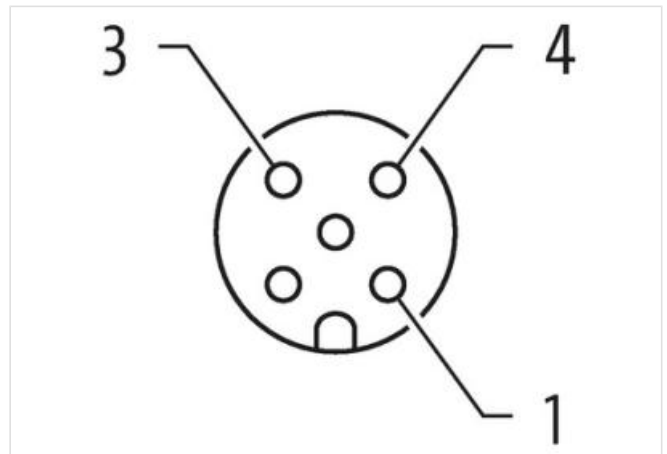
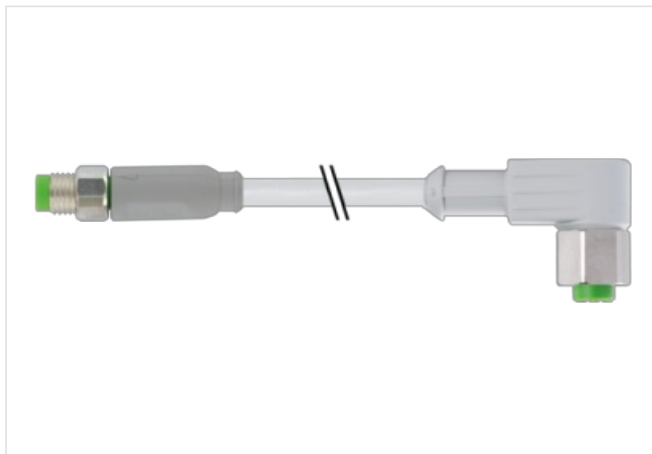
Stainless steel 1.4404 (V4A)

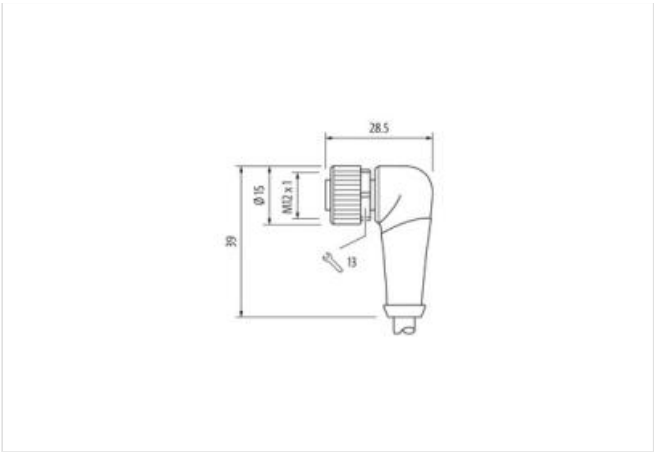
Profile gasket

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**



Product may differ from Image



|                                           |               |
|-------------------------------------------|---------------|
| Cable length                              | 2,5 m         |
| Side 1                                    |               |
| Tightening torque                         | 0,6 Nm        |
| Family construction form                  | M12           |
| Thread                                    | M12 x 1       |
| suitable for corrugated tube (internal Ø) | 10 mm         |
| Width across flats                        | SW14          |
| Degree of protection (EN IEC 60529)       | IP67          |
| Side 2                                    |               |
| Tightening torque                         | 0,4 Nm        |
| Family construction form                  | M8            |
| Thread                                    | M8 x 1        |
| suitable for corrugated tube (internal Ø) | 6,5 mm        |
| Width across flats                        | SW9           |
| Commercial data                           |               |
| ECLASS-6.0                                | 27279218      |
| ECLASS-7.0                                | 27279218      |
| ECLASS-8.0                                | 27279218      |
| ECLASS-9.0                                | 27060311      |
| ECLASS-10.1                               | 27060311      |
| ECLASS-11.1                               | 27060311      |
| ECLASS-12.0                               | 27060311      |
| ETIM-5.0                                  | EC001855      |
| customs tariff number                     | 85444290      |
| GTIN                                      | 4048879616478 |
| Packaging unit                            | 1             |
| Electrical data   Supply                  |               |
| Operating voltage AC                      | 50 V          |
| Operating voltage DC                      | 60 V          |
| Current operating per contact max.        | 4 A           |
| Device protection   Electrical            |               |

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (ISO 20653:2013)  | IP66K             |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 1,5 kV            |
| Material group (IEC 60664-1)           | I                 |

#### Mechanical data | Material data

|                  |                              |
|------------------|------------------------------|
| Locking material | Stainless steel 1.4404 (V4A) |
|------------------|------------------------------|

#### Mechanical data | Mounting data

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

#### Environmental characteristics | Climatic

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

#### Installation | Cable

|                                                   |                                                  |
|---------------------------------------------------|--------------------------------------------------|
| wire arrangement                                  | brown, black, blue                               |
| Cable identification                              | 210                                              |
| Cable Type                                        | 1                                                |
| Jacket Color                                      | gray                                             |
| Type of Certificate                               | cURus                                            |
| Amount stranding                                  | 1                                                |
| Stranding                                         | 3 wires twisted                                  |
| wire arrangement                                  | brown, black, blue                               |
| Cable weight                                      | 29,37 g/m                                        |
| Material jacket                                   | PVC                                              |
| Shore hardness jacket                             | 85 ± 5 Shore A                                   |
| Freedom from ingredients (jacket)                 | lead-free, cadmium-free, CFC-free, silicone-free |
| Outer-diameter (jacket)                           | 4,5 mm                                           |
| Tolerance outer diameter (sheath)                 | ± 5 %                                            |
| Material wire insulation                          | PVC                                              |
| Amount wires                                      | 3                                                |
| Outer diameter insulation                         | 1,25 mm                                          |
| Outer diameter tolerance core insulation          | ± 5 %                                            |
| Shore hardness wire insulation                    | 45 ± 5 Shore D                                   |
| Material properties wire insulation               | good machinability                               |
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, silicone-free |
| Amount strands (wire)                             | 14                                               |
| Diameter of single wires                          | 0,15 mm                                          |
| Conductor crosssection (wire)                     | 0,25 mm²                                         |
| Material conductor wire                           | Stranded copper wire, bare                       |
| Conductor type (wire)                             | Strand class 5                                   |
| Nominal voltage AC max.                           | 300 V                                            |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                |
| Current load capacity min. wire                   | 4,5 A                                            |
| Electrical resistance line constant wire          | 79 Ω/km @ 20 °C                                  |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                      |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                      |
| Min. operating temperature (static)               | -30 °C                                           |
| Max. operating temperature (fixed)                | 80 °C                                            |

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-06-03

Murrelektronik B.V. | Takkebijsters 3 | 4817 BL Breda | Fon 085-22 20 282 | Fax 085-22 20 283 | shop@murrelektronik.nl | shop.murrelektronik.nl

|                                      |                                                      |
|--------------------------------------|------------------------------------------------------|
| Operating temperature min. (dynamic) | -5 °C                                                |
| Operating temperature max. (dynamic) | 80 °C                                                |
| Flame resistance                     | UL 1581 § 1100 FT2   UL 1581 § 1090   IEC 60332-2-2  |
| chemical resistance                  | Good, application-related testing                    |
| Gasoline resistance                  | Good, application-related testing                    |
| Oil resistance                       | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)               | 5 x Outer diameter                                   |
| Bending radius (dynamic)             | 10 x Outer diameter                                  |