

B24 Bulkhead mounted h., IP67

Double locking lever m.


B24  
Bulkhead mounted housing  
Double locking lever  
IP67  
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



Product may differ from Image

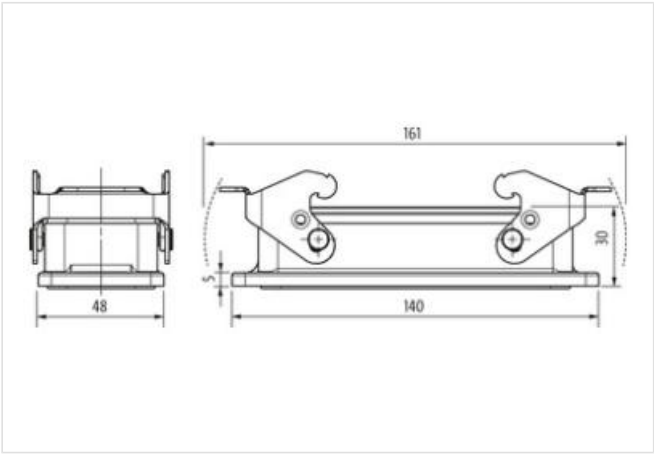

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879647298 |
| Packaging unit        | 1             |

Installation | Connection

|                    |     |
|--------------------|-----|
| Mating cycles min. | 500 |
|--------------------|-----|

Device protection | Electrical

|                                        |                  |
|----------------------------------------|------------------|
| Degree of protection (EN IEC 60529)    | IP67             |
| Additional condition protection degree | inserted, locked |

Mechanical data

|              |                          |
|--------------|--------------------------|
| Housing type | Bulkhead mounted housing |
|--------------|--------------------------|

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
| Coating locking | verzinkt      |
| Material gasket | NBR           |

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B24 |
|------|-----|

|        |       |
|--------|-------|
| Height | 30 mm |
|--------|-------|

|       |       |
|-------|-------|
| Width | 48 mm |
|-------|-------|

|       |        |
|-------|--------|
| Depth | 140 mm |
|-------|--------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Double locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|