


CAP WITH SPRING PLUG TERMINALS 21 POLE

Use with MVP12 / Exact12 UNIVERSAL

4-way distribution box M12, UNIVERSAL
Spring clamp plug-in terminals
Replaces identical product (Art.No. 277314)
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

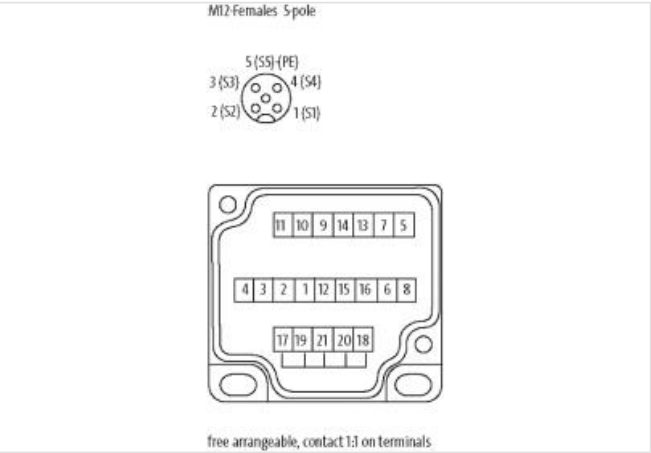

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27143423 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |
| ECLASS-8.0 | 27279219 |
| ECLASS-9.0 | 27440108 |

| | |
|-----------------------|---------------|
| ECLASS-10.1 | 27440111 |
| ECLASS-11.1 | 27440111 |
| ECLASS-12.0 | 27440111 |
| ETIM-5.0 | EC002585 |
| customs tariff number | 85366990 |
| GTIN | 4048879378529 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|--------------------|-----|
| Total current max. | 8 A |
|--------------------|-----|

Installation

| | |
|-------------------------------|---------------------|
| Connection cross section max. | 1,5 mm ² |
| AWG number max. | 16 |

Installation | Connection

| | |
|------------|---------------------------|
| Connection | Spring clamp terminals FK |
|------------|---------------------------|

Device protection | Media

| | |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

Mechanical data | Material data

| | |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 80 °C |

Connection type 2

| | |
|--------------------------|--------|
| Family construction form | Cap |
| No. of poles | 21 |
| Family construction form | M12 |
| Gender | female |
| Color contact carrier | black |
| Coding | A |
| No. of poles | 5 |