

ABB CONTACTOR SUPPRESSOR

Varistor, 24VDC


24 V AC/DC

VDR

For other configurations and voltages, please inquire.

[Link naar het product](#)

Afbeelding

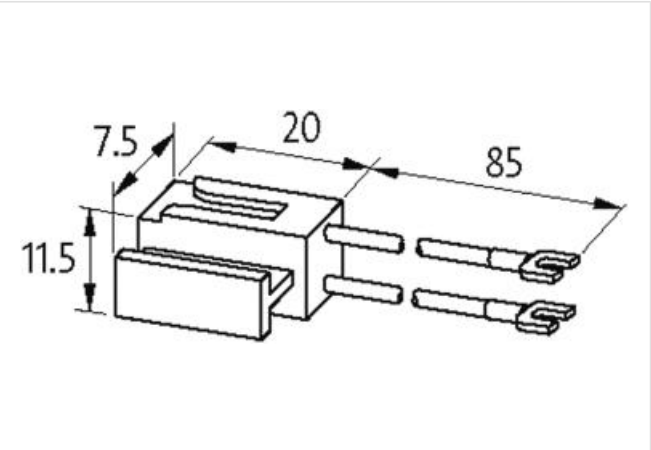

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013
ECLASS-11.1	27371013

ECLASS-12.0	27371013
-------------	----------

ETIM-5.0	EC002498
----------	----------

Douane tarief nummer	85363010
----------------------	----------

GTIN	4048879018067
------	---------------

Verpakkingseenheid	1
--------------------	---

Compatibility | Compatible with

Appropriate contactors	B 6, BC 6, KC 6, VB 6
------------------------	-----------------------

Electrical data

Damping factor	1.5× UN
----------------	---------

Electrical data | Input

Input voltage AC min.	0 V
-----------------------	-----

Input voltage AC max.	30 V
-----------------------	------

Input voltage DC min.	0 V
-----------------------	-----

Input voltage DC max.	30 V
-----------------------	------

Installation | Connection

Connection information	self-securing cable forks
------------------------	---------------------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Height	20 mm
--------	-------

Width	11,5 mm
-------	---------

Depth	7,5 mm
-------	--------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	70 °C
----------------------------	-------