

SLIM LINE POTENTIAL TERMINAL BLOCK


Potential terminal block
Slim Line

[Link naar het product](#)

Afbeelding



Product van afwijken van afbeelding

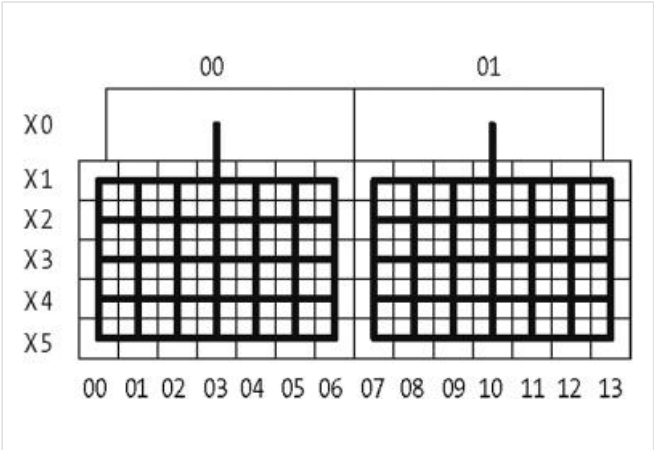

Commerciële gegevens	
ECLASS-6.0	27141106
ECLASS-6.1	27141106
ECLASS-7.0	27141106
ECLASS-8.0	27141106
ECLASS-9.0	27141106
ECLASS-10.1	27141106
ECLASS-11.1	27141106
ECLASS-12.0	27141106
ETIM-5.0	EC001283
Douane tarief nummer	85369010
GTIN	4048879049429
Verpakkingseenheid	1
Electrical data Supply	
Operating voltage AC max.	30 V
Operating voltage DC max.	30 V
Total current max.	20 A
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP20
Mechanical data Mounting data	
Height	70 mm
Width	56 mm
Depth	32,5 mm
Environmental characteristics Climatic	

Operating temperature min.	0 °C
Operating temperature max.	55 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C

Connection type 4

Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	00
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	01
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	7
PIN 1	00
PIN 2	01
PIN 3	02
PIN 4	03
PIN 5	04
PIN 6	05
PIN 7	06
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	7
PIN 1	07
PIN 2	08
PIN 3	09
PIN 4	10
PIN 5	11
PIN 6	12
PIN 7	13