


S-Lamp 22 L M12(4)

Lamp

S-Lamp 22 L M12(4)  
Lamp  
Mounting hole 22,3 mm  
Connection M12 (4-pin)

[Link naar het product](#)

Afbeelding

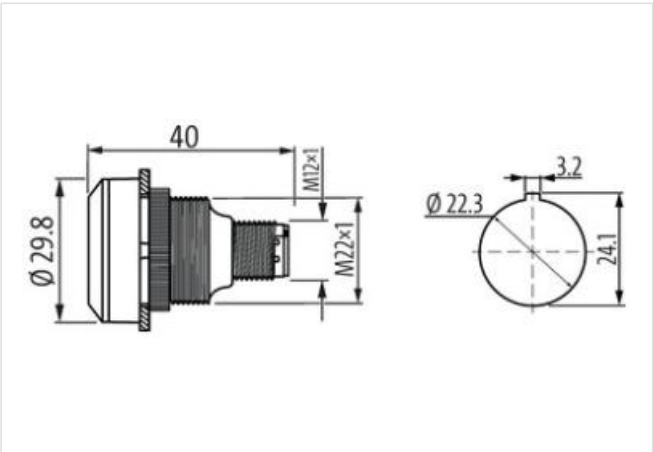

Product van afwijken van afbeelding



Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.1           | 27371223      |
| ECLASS-7.0           | 27371223      |
| ECLASS-8.0           | 27371223      |
| ECLASS-9.0           | 27371223      |
| ECLASS-10.1          | 27371223      |
| ECLASS-11.1          | 27371223      |
| ECLASS-12.0          | 27371223      |
| ETIM-5.0             | EC000272      |
| Douane tarief nummer | 94054231      |
| GTIN                 | 4065909019245 |
| Verpakkingseenheid   | 1             |

Electrical data | Supply

|                           |        |
|---------------------------|--------|
| Operating voltage DC      | 24 V   |
| Operating voltage DC min. | 20 V   |
| Operating voltage DC max. | 28 V   |
| Rated operating current   | 0,01 A |
| Operating current max.    | 12 mA  |

Electrical data | Input

|                       |        |
|-----------------------|--------|
| Short-circuit current | 1000 A |
|-----------------------|--------|

Installation | Connection

Family construction form M12

#### Installation | Pin assignment

Coding A  
No. of poles 4

#### Device protection | Electrical

Installation height max. ASL 2000 m  
Degree of protection front (EN IEC 60529) IP66, IP67, IP69  
Degree of protection back (EN IEC 60529) IP66, IP67  
Pollution Degree 2  
Short circuit protective device (SCPD) fuse 250 V / 0.1 A / 1.5 kA gG quick  
Rated insulation voltage 250 V  
Overvoltage category (EN 60950-1) II

#### Device protection | Mechanical

UL enclosure type rating front side type 4X

#### Device protection | Media

Salt-spray resistance (IEC 60068-2-11) yes

#### Mechanical data

Can be illuminated yes  
Color black  
Color collar black  
Color illuminant white  
Shape collar round  
Type of illuminant LED

#### Mechanical data | Material data

Material housing Plastic

#### Mechanical data | Mounting data

Mounting method Threaded ring  
Installation height 9,8 mm  
Mounting depth 36,4 mm  
Mounting hole 22,3 mm  
Height 29,8 mm  
Width 40 mm  
Grid min. 30 mm

#### Environmental characteristics | Climatic

Operating temperature min. -25 °C  
Operating temperature max. 70 °C  
Derating from 40 °C  
Storage temperature min. -40 °C  
Storage temperature max. 90 °C  
Relative humidity max. (operation) 93 %

#### Connection type 2

Family construction form M12  
Gender male  
Color contact carrier black  
Coding A  
No. of poles 4  
PIN 2 LED (A)  
PIN 3 LED (K)  
Family construction form M12  
Gender male

|              |         |
|--------------|---------|
| Coding       | A       |
| No. of poles | 4       |
| PIN 2        | LED (A) |
| PIN 3        | LED (K) |