



NT 3 AC-DC/DC-CONVERTER, LINEAR REGULATED

IN: 10-32VAC/12-42VDC OUT: 5-35V/3,5ADC

INPUT: 10...35 V AC/12...42 V DC
OUTPUT: 5...35 V DC
Output rating: 122 W
Current: 3.5 A

[Link naar het product](#)

Afbeelding

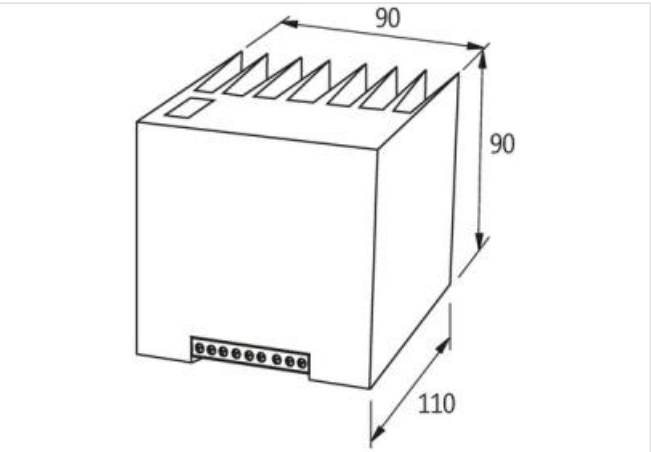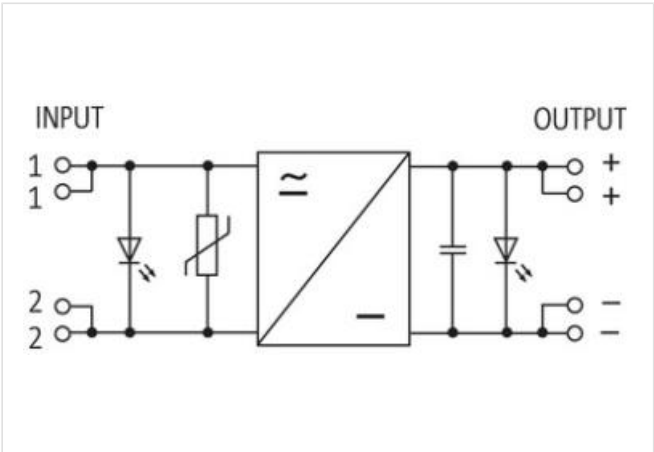

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27210901
ECLASS-6.1	27210901
ECLASS-7.0	27210901
ECLASS-8.0	27210901
ECLASS-9.0	27210901
ECLASS-10.1	27210901

ECLASS-11.1	27210901
ECLASS-12.0	27210901
ETIM-5.0	EC002540
Douane tarief nummer	85044095
GTIN	4048879079501
Verpakkingseenheid	1

Electrical data

Security level	SELV
----------------	------

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Fuse protection primary side internal	6,3 A
Characteristic back-up fuse	Inertia
Input voltage AC min.	10 V
Input voltage AC max.	32 V
Input voltage DC min.	12 V
Input voltage DC max.	42 V
Input current DC max.	3 A

Electrical data | Output

Output voltage DC min.	5 V
Output voltage DC max.	35 V
Output voltage adjustable	yes
Output current max.	3,5 A
Ripple effective max.	300 mV

Device protection | Electrical

Short-circuit protected	yes
-------------------------	-----

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

Connection type 1

Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	9
PIN 1	-
PIN 2	-
PIN 3	+
PIN 4	+
PIN 5	PE
PIN 6	2
PIN 7	2
PIN 8	1
PIN 9	1