



MPL POWER SUPPLY 3-PHASE, SMOOTHED

IN: 400VAC+/- 5% OUT: 24V/5ADC

Current: 5 A  
Output rating: 120 W  
This power supply units meet the (EN 61000-3-2) standard for harmonic current.  
Any mounting position on vertical wall, condensation not permissible

Link naar het product

Afbeelding

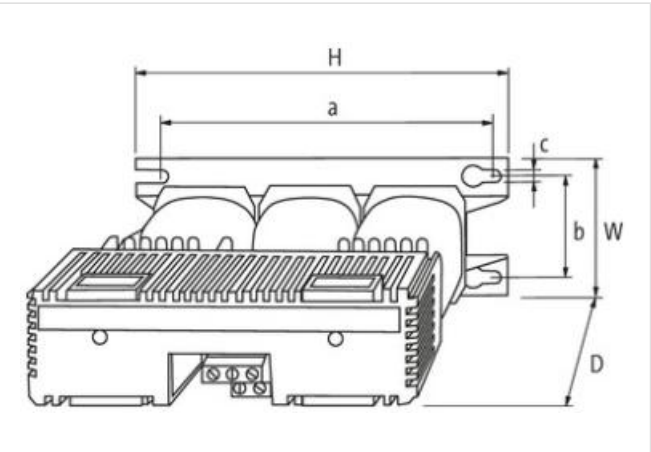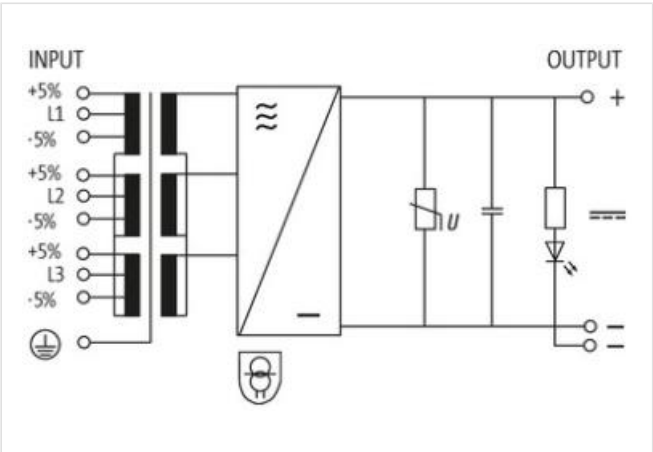

Product van afwijken van afbeelding



| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27049002 |
| ECLASS-6.1           | 27049002 |
| ECLASS-7.0           | 27049002 |
| ECLASS-8.0           | 27049002 |
| ECLASS-9.0           | 27040701 |
| ECLASS-10.1          | 27040701 |

|                      |               |
|----------------------|---------------|
| ECLASS-11.1          | 27040701      |
| ECLASS-12.0          | 27040701      |
| ETIM-5.0             | EC002540      |
| Douane tarief nummer | 85044095      |
| GTIN                 | 4048879079273 |
| Verpakkingseenheid   | 1             |

**Electrical data**

|                |      |
|----------------|------|
| Security level | SELV |
|----------------|------|

**Electrical data | Supply**

|                 |              |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

**Electrical data | Input**

|                                         |         |
|-----------------------------------------|---------|
| Fuse protection 1 primary side external | 0,4 A   |
| Characteristic back-up fuse             | Inertia |
| Input voltage AC                        | 400 V   |
| Input voltage AC min.                   | 380 V   |
| Input voltage AC max.                   | 420 V   |
| Current input AC                        | 0,3 A   |
| Phase number input                      | 3       |
| Efficiency                              | 72 %    |

**Electrical data | Output**

|                                         |                               |
|-----------------------------------------|-------------------------------|
| Fuse protection secondary side external | 5 A                           |
| Output suppression                      | LED, Screening capacitor, VDR |
| Output voltage DC                       | 24 V                          |
| Output voltage adjustable               | no                            |
| Output current max.                     | 5 A                           |
| Characteristic secondary fuse           | Inertia                       |
| Ripple max.                             | 2 %                           |

**Mechanical data | Mounting data**

|                            |                        |
|----------------------------|------------------------|
| Suitable for mounting type | Schlüssellochabhängung |
| Mounting dimension a       | 100 mm                 |
| Mounting dimension b       | 55 mm                  |
| Mounting dimension c       | 5 mm                   |
| Height                     | 125 mm                 |
| Width                      | 71 mm                  |
| Depth                      | 153 mm                 |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 55 °C  |

**Conformity**

|                  |                                   |
|------------------|-----------------------------------|
| Product standard | EN 61558-2-6, EN 62041 category I |
| EMC              | EN 55011 B, EN 61000-3-2          |