




MTS 1-Phase safety and isolating transformer

P: 63VA IN: 230VAC +/- 15VAC OUT: 24VAC

The MST series comprises single-phase safety transformers/isolating transformers of the protection class I and protection degree IP00 with double insulation between the primary and secondary windings for general use in industrial applications.

Link naar het product

Afbeelding

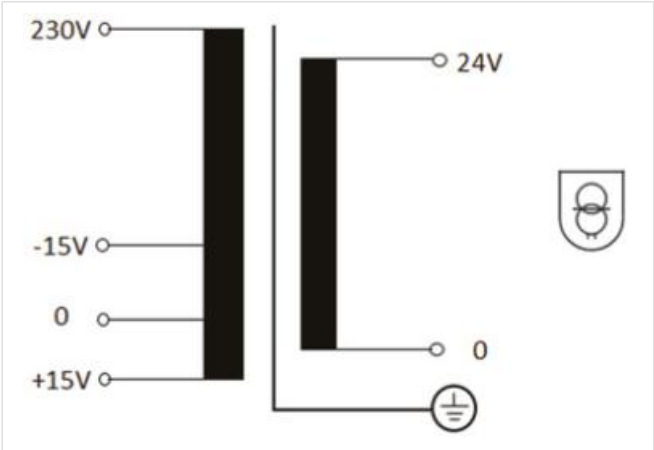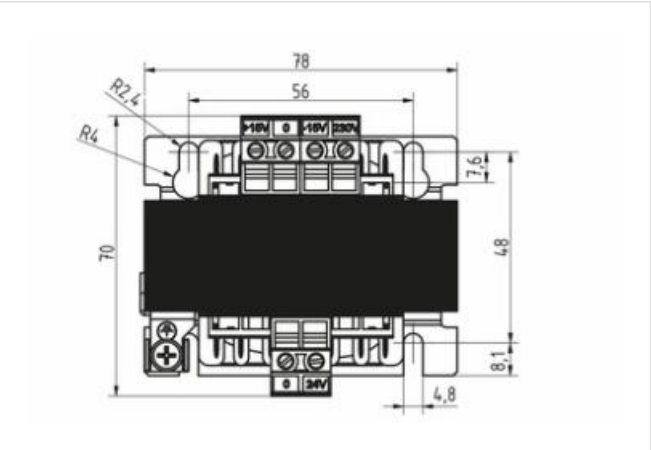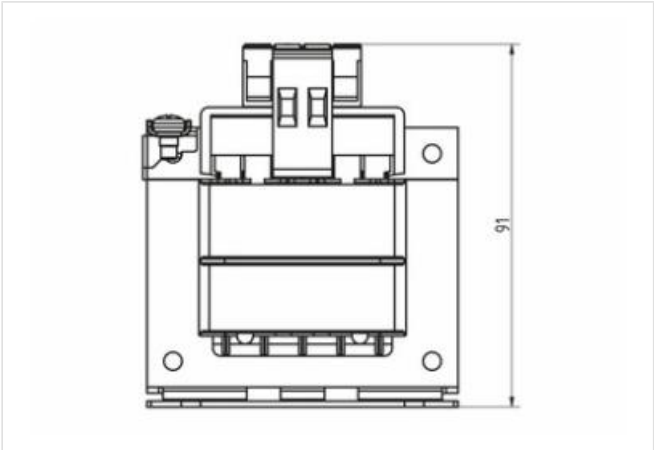

Product van afwijken van afbeelding



Electrical data Supply	
Power frequency	50/60 Hz
Electrical data Input	
Input voltage AC	230 V
Current input AC	0,35 A
Max. inrush current	3,8 A
Short-circuit current	3 A

Electrical data | Output

Output voltage AC	24 V
-------------------	------

Mechanical data | Mounting data

Mounting method	screwed
Suitable for mounting type	Schlüssellochabhängung
Mounting dimension a	48 mm
Mounting dimension b	56 mm
Mounting dimension c	2,4 mm
Height	70 mm
Width	78 mm
Depth	91 mm
Diameter bore	2,4 mm
Length bore	7,6 mm

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
Ambient temperature max.	40 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-6, EN 62041
EMC	2014/30/EU

Commerciële gegevens

Douane tarief nummer	85043180
GTIN	4065909078846
Verpakkingseenheid	1