





MET 1-Phase safety and isolating transformer

P: 160VA IN: 230-400VAC +/- 15VAC OUT: 12VAC

The MET series comprises single-phase control transformers/isolating transformers of the protection class I and protection degree IP00 with double insulation between the primary and secondary windings for general use in industrial applications.

Link naar het product

Afbeelding

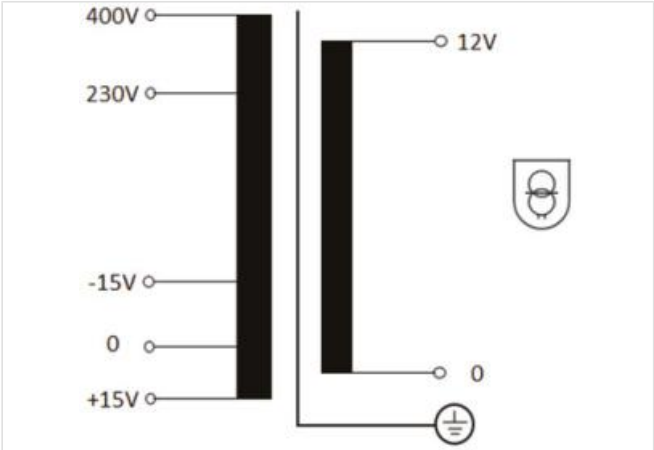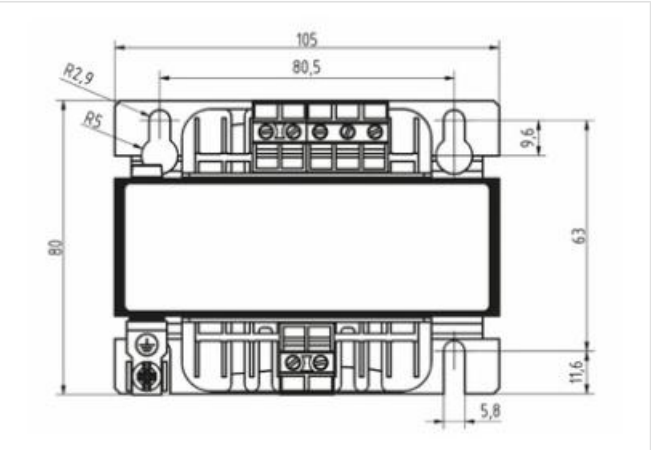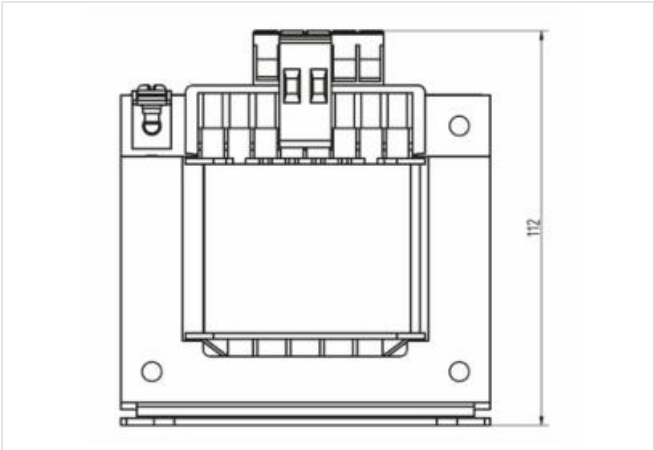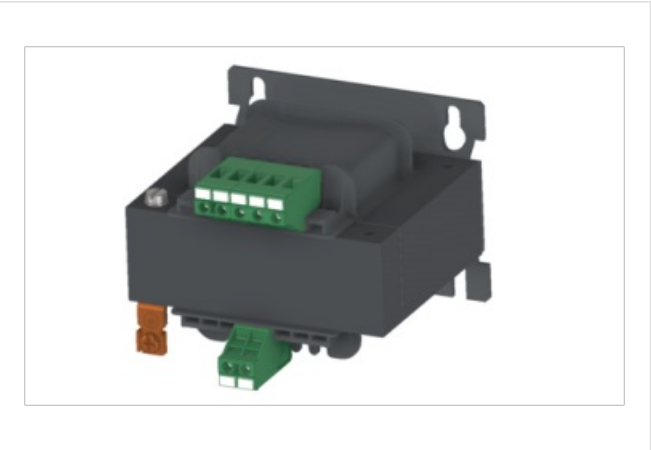

Product van afwijken van afbeelding



Electrical data | Supply

Power frequency 50/60 Hz

Electrical data | Input

Input voltage 1 AC	230 V
Input voltage 2 AC	400 V
Input current at input voltage 1 AC	0,79 A
Input current at input voltage 2 AC	0,45 A

Inrush current at input voltage 1	15,3 A
Inrush current at input voltage 2	8,8 A
Short-circuit current at input voltage 1	12,9 A
Short-circuit current at input voltage 2	7,4 A

Electrical data | Output

Output voltage AC	12 V
-------------------	------

Mechanical data | Mounting data

Mounting method	screwed
Suitable for mounting type	Schlüssellochaufhängung
Mounting dimension a	63 mm
Mounting dimension b	80,5 mm
Mounting dimension c	2,9 mm
Height	80 mm
Width	105 mm
Depth	112 mm
Diameter bore	2,9 mm
Length bore	9,6 mm

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
Ambient temperature max.	50 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-6, EN 62041
EMC	2014/30/EU

Commerciële gegevens

Douane tarief nummer	85043180
GTIN	4065909079218
Verpakkingseenheid	1