




MET 1-Phase control and isolating transformer

P: 2500VA IN: 230-400VAC +/- 15VAC OUT: 115VAC

The MET series comprises single-phase control transformers/isolating transformers of the protection class I and protection degree IP00 with double insulation between the primary and secondary windings for general use in industrial applications.

Link naar het product

Afbeelding

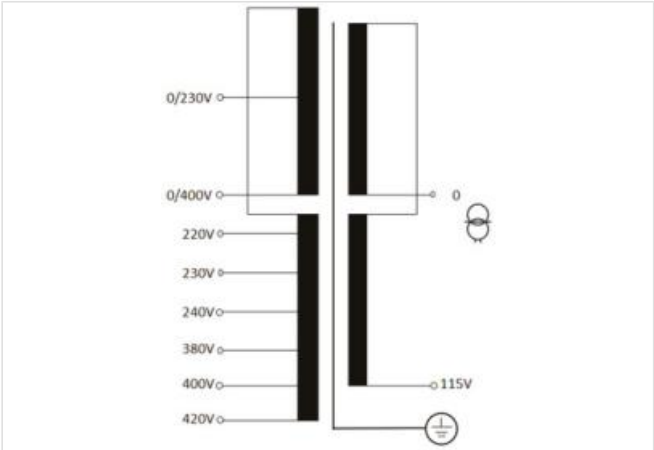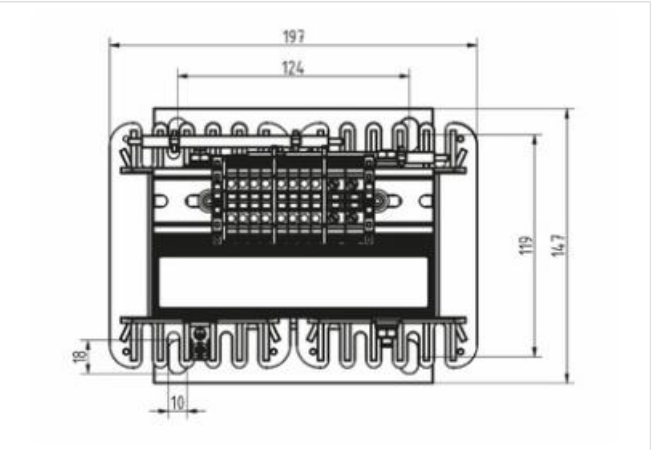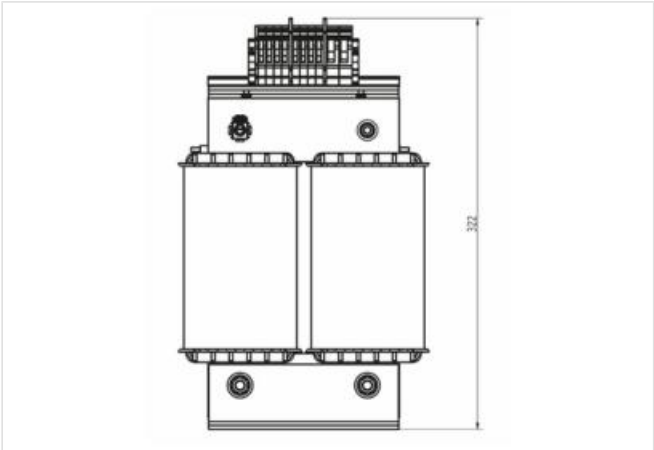

Product van afwijken van afbeelding



Electrical data | Supply

Power frequency 50/60 Hz

Electrical data | Input

Input voltage 1 AC	230 V
Input voltage 2 AC	400 V
Input current at input voltage 1 AC	11,2 A
Input current at input voltage 2 AC	6,4 A

Inrush current at input voltage 1	212 A
Inrush current at input voltage 2	122 A
Short-circuit current at input voltage 1	411 A
Short-circuit current at input voltage 2	236 A

Electrical data | Output

Output voltage AC	115 V
-------------------	-------

Mechanical data | Mounting data

Mounting method	screwed
Suitable for mounting type	4 hole screw mounting
Mounting dimension a	119 mm
Mounting dimension b	124 mm
Mounting dimension c	10 mm
Height	147 mm
Width	197 mm
Depth	322 mm
Diameter bore	10 mm
Length bore	18 mm

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
Ambient temperature max.	50 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-4, EN 62041
EMC	2014/30/EU

Commerciële gegevens

Douane tarief nummer	85043200
GTIN	4065909080795
Verpakkingseenheid	1