


MST SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:1000VA IN:400/420/440VAC OUT:230VAC

Single-phase - Control and Isolation Transformers
1000 VA
with fuse
Other voltages on request.

[Link naar het product](#)

Afbeelding

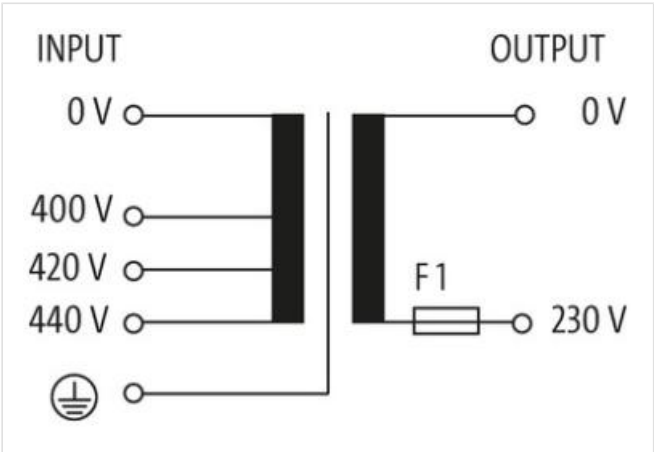

Product van afwijken van afbeelding

Commerciële gegevens

ECLASS-6.0	27031202
ECLASS-7.0	27031202
ECLASS-8.0	27031202
ECLASS-9.0	27031202
ETIM-5.0	EC002485
Douane tarief nummer	85043180
GTIN	4048879294492
Verpakkingseenheid	1

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data Input	
Input voltage 1 AC	400 V
Input voltage 2 AC	420 V
Input voltage 3 AC	440 V
Input voltage AC	400 V
Current input AC	2,8 A
Max. inrush current	31 A
Short-circuit current	78 A
Electrical data Output	
Output voltage AC	230 V
Output voltage adjustable	no
Power rating AC max.	1000 VA
Device protection Electrical	
Insulation test voltage input - output	5,7 kV
Mechanical data Mounting data	
Suitable for mounting type	Schlüssellochaufhängung
Mounting dimension a	134 mm
Mounting dimension b	122 mm
Mounting dimension c	7 mm
Height	156 mm
Width	150 mm
Depth	150 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	40 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C
Conformity	
Product standard	EN 61558-2-6, EN 62041 category 0
Connection type 3	
Connection type 1	Input
Connection type 2	Output
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	4
PIN 2	400 V
PIN 3	420 V
PIN 4	440 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 2	230 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	metallic
No. of poles	1
PIN 1	PE