


MTS SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:63VA IN:230VAC±15VAC OUT:230VAC/2x0VAC

Single-phase - Control and Isolation Transformers
63 VA
Isolation class T 40/B
Other voltages on request.

[Link naar het product](#)

Afbeelding

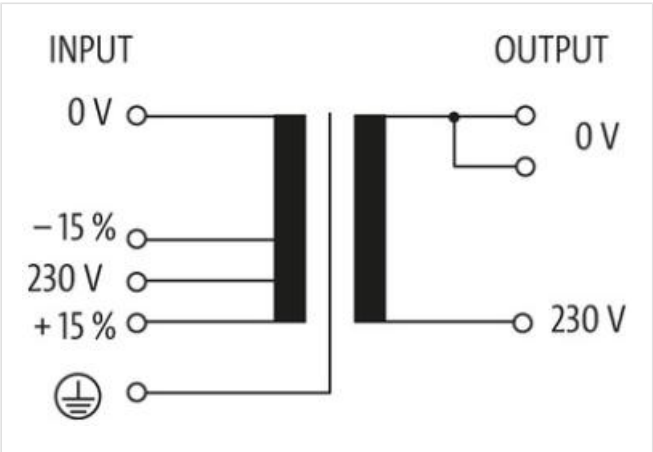

Product van afwijken van afbeelding

Commerciële gegevens

ECLASS-6.0	27031202
ECLASS-7.0	27031202
ECLASS-8.0	27031202
ECLASS-9.0	27031202
ETIM-5.0	EC002485
Douane tarief nummer	85043180
GTIN	4048879301657
Verpakkingseenheid	1

Electrical data | Supply

Power frequency 50 ... 60 Hz

Electrical data Input	
Input voltage AC	230 V
Input voltage AC min.	195,5 V
Input voltage AC max.	264,5 V
Current input AC	0,32 A
Max. inrush current	2 A
Short-circuit current	2,64 A
Electrical data Output	
Output voltage AC	230 V
Output voltage adjustable	no
Power rating AC max.	63 VA
Device protection Electrical	
Insulation test voltage input - output	3,8 kV
Mechanical data Mounting data	
Mounting method	screwed
Suitable for mounting type	mounting rail
Mounting dimension a	56 mm
Mounting dimension b	56 mm
Mounting dimension c	4,8 mm
Height	92 mm
Width	79 mm
Depth	93 mm
Diameter bore	4,8 mm
Length bore	8,4 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	40 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C
Conformity	
Product standard	EN 61558-2-6, EN 62041 category 0
Connection type 3	
Connection type 1	Input
Connection type 2	Output
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	4
PIN 1	+ 15 V
PIN 3	- 15 V
PIN 4	230 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	3
PIN 1	0 V
PIN 2	0 V
PIN 3	230 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female

Color contact carrier	metallic
No. of poles	1
PIN 1	PE