



MTS SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:250VA IN:400VAC±5% OUT:24VAC/230VAC

Single-phase - Control and Isolation Transformers  
250 VA  
Isolation class T 40/B

[Link naar het product](#)

Afbeelding

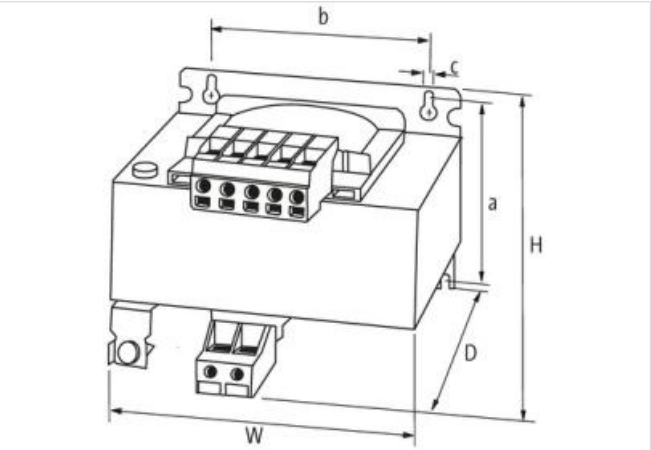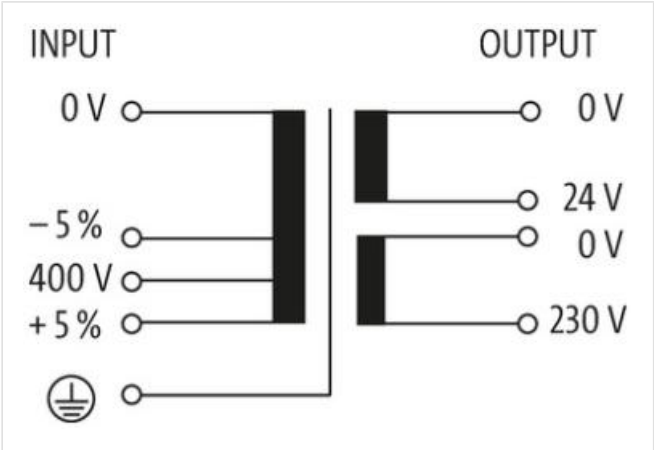

Product van afwijken van afbeelding



| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27031202 |
| ECLASS-6.1           | 27031302 |
| ECLASS-7.0           | 27031302 |
| ECLASS-8.0           | 27031302 |
| ECLASS-9.0           | 27031302 |
| ECLASS-10.1          | 27031302 |
| ECLASS-11.1          | 27031302 |

ECLASS-12.0 27031302

ETIM-5.0 EC002485

Douane tarief nummer 85043180

GTIN 4048879307161

Verpakkingseenheid 1

**Electrical data | Supply**

Power frequency 50 ... 60 Hz

**Electrical data | Input**

Input voltage AC 400 V

Input voltage AC min. 380 V

Input voltage AC max. 420 V

Current input AC 0,74 A

Max. inrush current 9,1 A

Short-circuit current 13,2 A

**Electrical data | Output**

Output voltage AC 1 24 V

Output voltage AC 2 230 V

Output voltage adjustable no

Power rating AC max. 250 VA

**Device protection | Electrical**

Insulation test voltage input - output 5,8 kV

**Mechanical data | Mounting data**

Mounting method screwed

Mounting dimension a 86,5 mm

Mounting dimension b 84 mm

Mounting dimension c 4,8 mm

Height 104 mm

Width 97 mm

Depth 108 mm

Diameter bore 4,8 mm

Length bore 8,4 mm

**Environmental characteristics | Climatic**

Operating temperature min. -20 °C

Operating temperature max. 40 °C

Storage temperature min. -40 °C

Storage temperature max. 80 °C

**Conformity**

Product standard EN 61558-2-4, EN 61558-2-6, EN 62041 category 0

**Connection type 3**

Connection type 1 Input

Connection type 2 Output

Connection Screw terminals SK

Family construction form terminal

Gender female

No. of poles 4

PIN 1 + 5%

PIN 3 - 5%

PIN 4 400 V

Connection Screw terminals SK

Family construction form terminal

Gender female

|                          |                    |
|--------------------------|--------------------|
| No. of poles             | 4                  |
| PIN 2                    | 24 V DC            |
| PIN 4                    | 230 V              |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | metallic           |
| No. of poles             | 1                  |
| PIN 1                    | PE                 |