

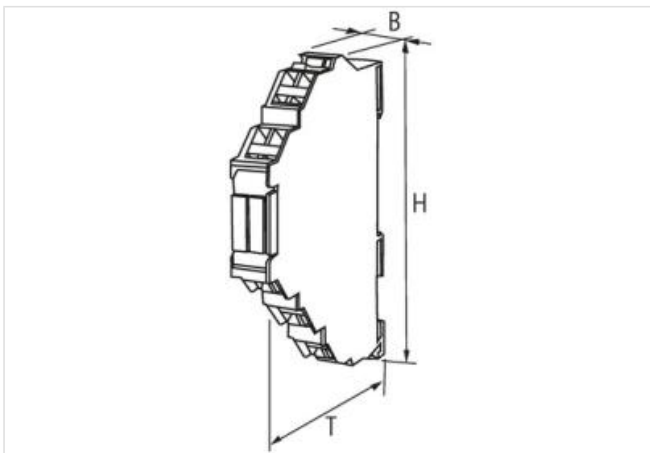
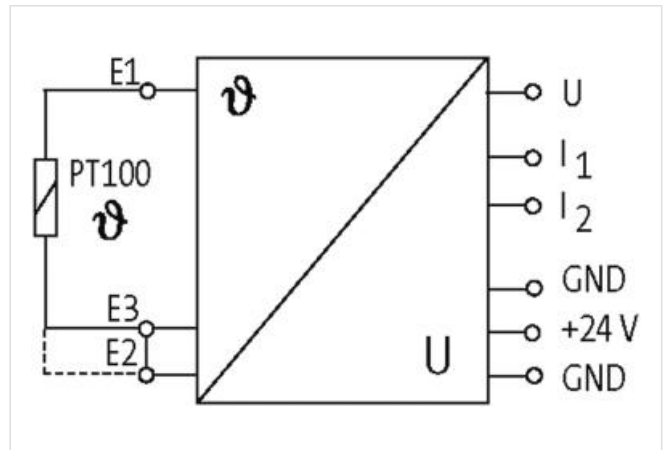
**MIRO TEMP. CONVERTER PT100 - 2 /3-LEAD METHOD**

IN: 0°C...+200°C - OUT:0...10 V / (0)4...20 mA

INPUT: 0...200 °C

Spring clamp terminals

Murrelektronik's temperature converters convert a temperature into the usual signal variables (0...10 V, 4...20 mA, 0...20 mA) in conjunction with a PT100 temperature sensor (IEC 751/ EN 60751). For this purpose, the MTW modules supply a constant current which causes a voltage drop at the PT100 resistor. This is linearized and converted into the corresponding output signals at the OUT terminals. All 3 signals can be used simultaneously. The 2-wire technique can be used for short distances between PT100 sensor and MTW module (<5 m). The 3-wire measuring method must be used for longer distances to compensate the measuring line resistance. For this purpose, a 3rd line (same length and design as the two measuring lines) is required. In this case, the factory-equipped bridge connecting E2 and E3 must be removed.

[Link naar het product](#)**Afbeelding**

Product van afwijken van afbeelding

**Commerciële gegevens**

ECLASS-6.0

27210990

De informatie in dit datablad is met de grootst mogelijke zorg samengesteld.  
Aansprakelijkheid beperkt tot grove nalatigheid voor de juistheid, volledigheid en actualiteit. Status: 2024-05-04

Murrelektronik B.V. | Takkebijsters 3 | 4817 BL Breda | Fon 085-22 20 282 | Fax 085-22 20 283 | shop@murrelektronik.nl | shop.murrelektronik.nl

|                      |               |
|----------------------|---------------|
| ECLASS-6.1           | 27210190      |
| ECLASS-7.0           | 27210190      |
| ECLASS-8.0           | 27210190      |
| ECLASS-9.0           | 27210129      |
| ECLASS-10.1          | 27210129      |
| ECLASS-11.1          | 27210129      |
| ECLASS-12.0          | 27210129      |
| ETIM-5.0             | EC001446      |
| Douane tarief nummer | 85437090      |
| GTIN                 | 4048879022347 |
| Verpakkingseenheid   | 1             |

#### Electrical data

|                          |     |
|--------------------------|-----|
| Accuracy (of full scale) | 1 % |
|--------------------------|-----|

#### Electrical data | Supply

|                           |       |
|---------------------------|-------|
| Operating voltage DC      | 24 V  |
| Operating voltage DC min. | 18 V  |
| Operating voltage DC max. | 30 V  |
| Operating current max.    | 80 mA |

#### Electrical data | Output

|                         |              |
|-------------------------|--------------|
| Load max.               | 25 mA        |
| Working resistance max. | 500 $\Omega$ |

#### Device protection | Electrical

|                            |     |
|----------------------------|-----|
| Overload protection output | yes |
|----------------------------|-----|

#### Mechanical data | Mounting data

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 90 mm                     |
| Width                      | 12,4 mm                   |
| Depth                      | 70 mm                     |

#### Environmental characteristics | Climatic

|                            |       |
|----------------------------|-------|
| Operating temperature min. | 0 °C  |
| Operating temperature max. | 60 °C |

#### Connection type 7

|                          |                           |
|--------------------------|---------------------------|
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | + 24 V DC                 |
| PIN 2                    | - 24 V DC                 |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | E 3                       |
| PIN 2                    | E 2                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |

|                          |                           |
|--------------------------|---------------------------|
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 2                    | E 1                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | U                         |
| PIN 2                    | 0 V                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | I 1                       |
| PIN 2                    | I 2                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | 24 V DC                   |
| PIN 2                    | 0 V                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | In 1                      |
| PIN 2                    | I 2                       |