

MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 800VA IN: 230VAC+/- 5% OUT: 230VAC


Single-phase - Control and Isolation Transformers
800 VA
Spring clamp terminals
Isolation class T 60/B

[Link naar het product](#)

Afbeelding



Product van afwijken van afbeelding

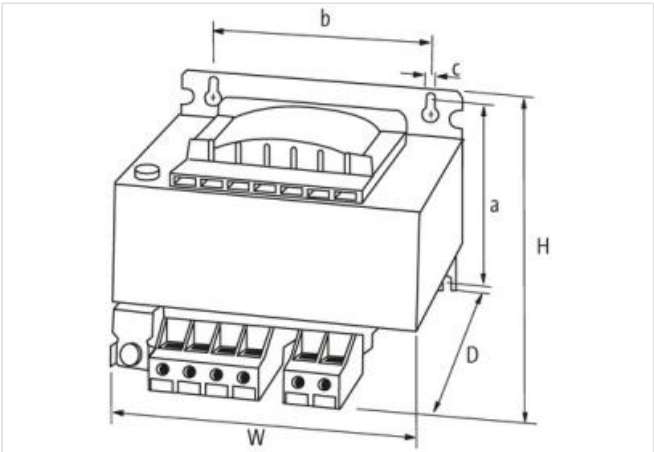

Commerciële gegevens

ECLASS-6.0	27031302
ECLASS-6.1	27031302
ECLASS-7.0	27031302
ECLASS-8.0	27031302
ECLASS-9.0	27031302
ECLASS-10.1	27031302
ECLASS-11.1	27031302
ECLASS-12.0	27031302
ETIM-5.0	EC002486
Douane tarief nummer	85043180
GTIN	4048879066440
Verpakkingseenheid	1

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	230 V
Input voltage AC min.	218,5 V
Input voltage AC max.	241,5 V
Current input AC	3,75 A
Max. inrush current	51,78 A

Short-circuit current	143,2 A
-----------------------	---------

Electrical data | Output

Output voltage AC	230 V
-------------------	-------

Output voltage adjustable	no
---------------------------	----

Power rating AC max.	800 VA
----------------------	--------

Device protection | Electrical

Insulation test voltage input - output	4 kV
--	------

Mechanical data | Mounting data

Suitable for mounting type	Schlüssellochaufhängung
----------------------------	-------------------------

Mounting dimension a	92 mm
----------------------	-------

Mounting dimension b	135 mm
----------------------	--------

Mounting dimension c	7 mm
----------------------	------

Height	118 mm
--------	--------

Width	175 mm
-------	--------

Depth	160 mm
-------	--------

Diameter bore	7 mm
---------------	------

Length bore	11 mm
-------------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------

Storage temperature min.	-40 °C
--------------------------	--------

Storage temperature max.	80 °C
--------------------------	-------

Conformity

Product standard	EN 61558-1, EN 61558-2-4, EN 62041 category 0
------------------	---