

SUPPRESSOR FOR SIEMENS CONTACTOR S00 MOTOR

RC, star, 3x575 VAC, 7.5 kV



3× 575 V AC

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

[Link naar het product](#)

Afbeelding

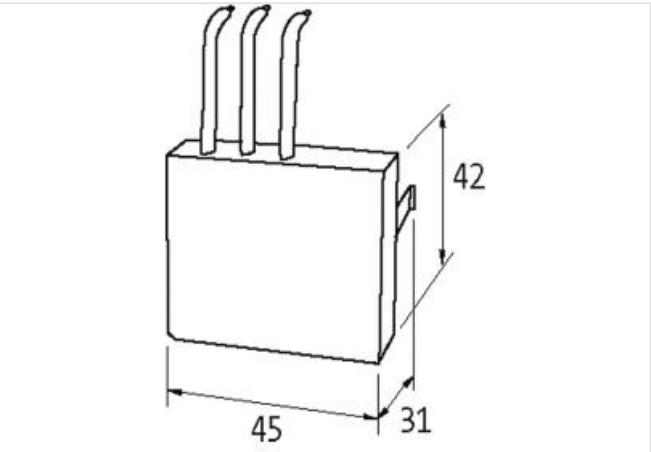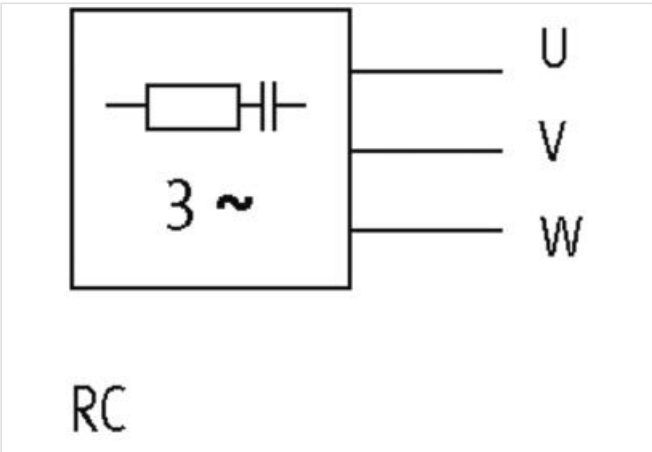

Product van afwijken van afbeelding

Commerciële gegevens	
ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013
ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC002498
Douane tarief nummer	85363010

GTIN	4048879413176
------	---------------

Verpakkingseenheid	10
--------------------	----

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	575 V
------------------	-------

Installation | Connection

Connection information	Connection wires
------------------------	------------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Combustibility class housing (UL94)	V-0
-------------------------------------	-----

Material housing	Plastic
------------------	---------

Material potting compound	2-component epoxy
---------------------------	-------------------

Mechanical data | Mounting data

Mounting method	geschnappt
-----------------	------------

Suitable for mounting type	Siemens Schütz Sirius 3 RT 201 mit Federzuganschluss
----------------------------	--

Height	42 mm
--------	-------

Width	45 mm
-------	-------

Depth	31 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------