


MIRO 6.2 TIMER

Impulsverlängerung 24 VDC / 25 mA / 45 ms

Transistor output
Impulse expansion: 40...45 ms
Spring clamp terminals

[Link naar het product](#)

Afbeelding

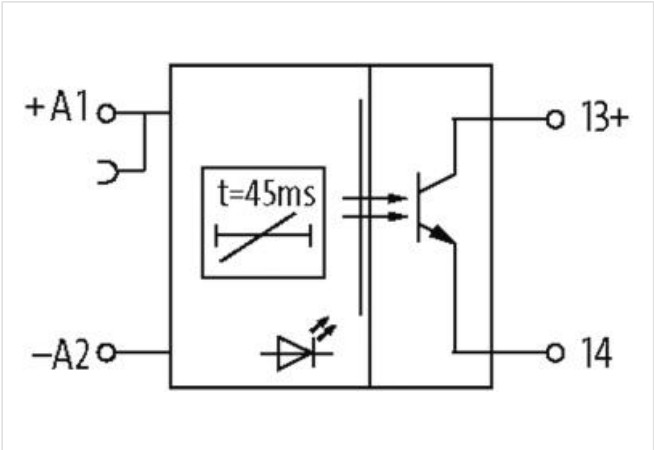

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27210990
ECLASS-6.1	27371790
ECLASS-7.0	27371790
ECLASS-8.0	27371605
ECLASS-9.0	27371605
ECLASS-10.1	27371605
ECLASS-11.1	27371605

ECLASS-12.0	27371605
ETIM-5.0	EC001439
Douane tarief nummer	85364110
GTIN	4048879411608
Verpakkingseenheid	1
Electrical data Output	
Switching frequency max.	20 Hz
Voltage switching DC min.	2 V
Switching voltage DC max.	30 V
Switching current DC	0,1 mA
Switching current max.	25 mA
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	91 mm
Width	6,2 mm
Depth	70 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C
Connection type 4	
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	14
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	13
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	- A 2
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	+ A 1