
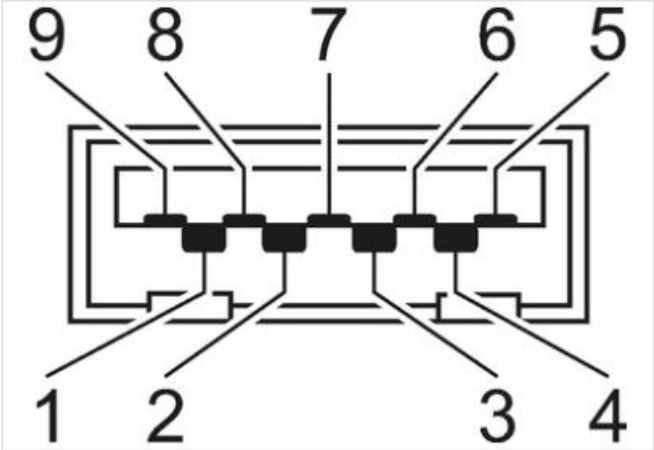
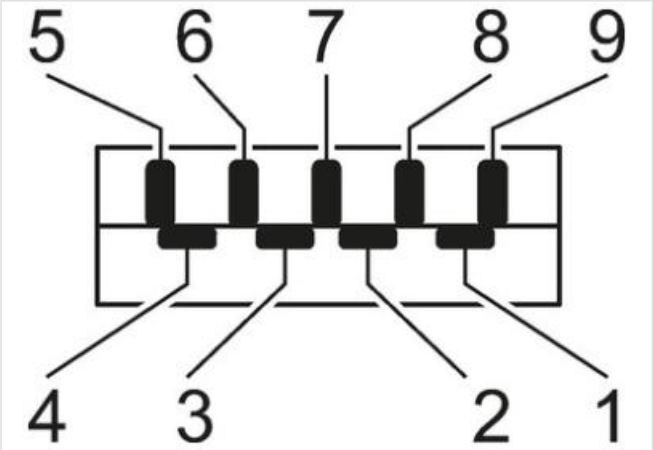
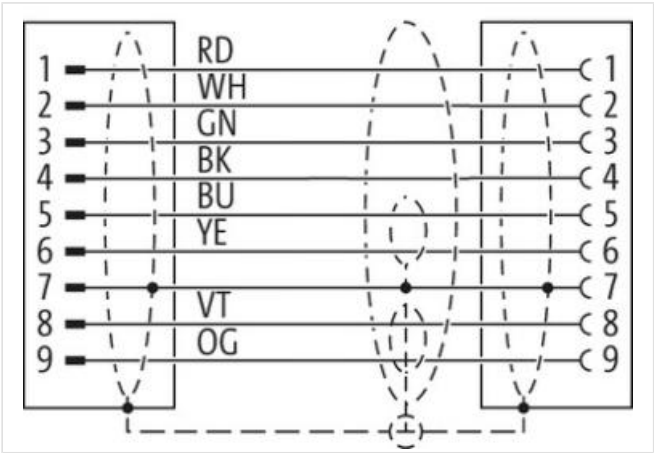
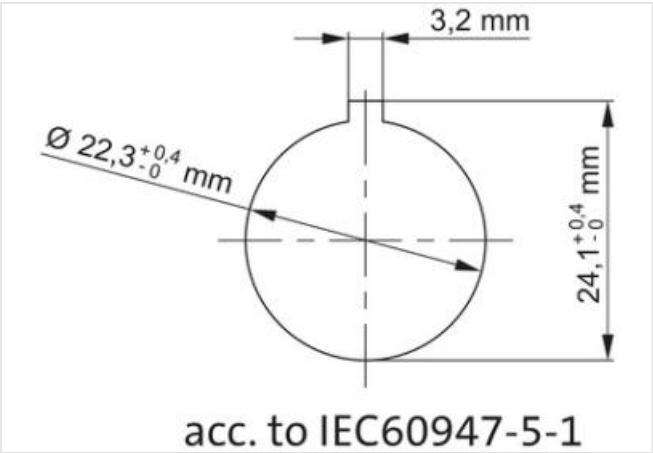


MSDD pass-through USB 3.0 form A, 1.5 m cable, design silver

Pass-through  
1 × USB 3.0 (female/male/1.5 m cable) form A

[Link naar het product](#)

Afbeelding

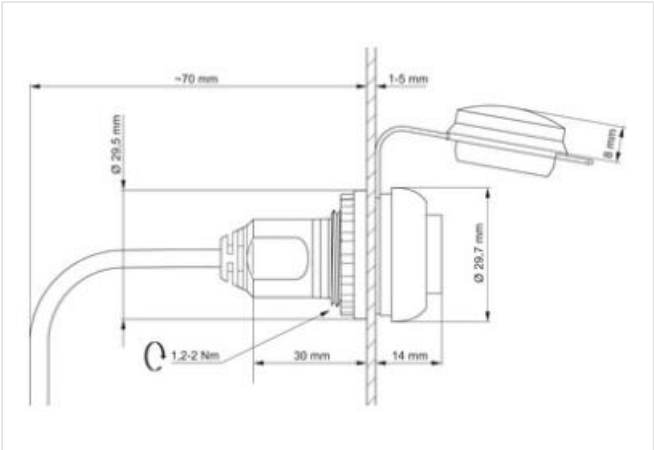

Product van afwijken van afbeelding



#### Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143423      |
| ECLASS-6.1           | 27143419      |
| ECLASS-7.0           | 27440515      |
| ECLASS-8.0           | 27440515      |
| ECLASS-9.0           | 27440515      |
| ECLASS-10.1          | 27440515      |
| ECLASS-11.1          | 27440515      |
| ECLASS-12.0          | 27440515      |
| ETIM-5.0             | EC002625      |
| Douane tarief nummer | 85444290      |
| GTIN                 | 4048879433419 |
| Verpakkingseenheid   | 1             |

#### Electrical data | Supply

|                        |        |
|------------------------|--------|
| Operating voltage AC   | 5 V    |
| Operating voltage DC   | 5 V    |
| Operating current max. | 900 mA |

#### Industrial communication

|                   |     |
|-------------------|-----|
| USB specification | 3.0 |
|-------------------|-----|

#### Device protection

|          |     |
|----------|-----|
| Shielded | yes |
|----------|-----|

#### Device protection | Electrical

|                                        |                           |
|----------------------------------------|---------------------------|
| Degree of protection (EN IEC 60529)    | IP20, IP65                |
| Protection NEMA                        | 2, 3R, 4, 12, 13, 4x      |
| Additional condition protection degree | inserted, in closed state |

#### Device protection | Mechanical

|                      |      |
|----------------------|------|
| Mechanical endurance | 1500 |
|----------------------|------|

#### Mechanical data | Mounting data

|                 |         |
|-----------------|---------|
| Diameter cutout | 22,5 mm |
| Diameter        | 29,5 mm |
| Mounting depth  | 70 mm   |
| Depth           | 30 mm   |

#### Approvals

|        |     |
|--------|-----|
| UL 50E | yes |
|--------|-----|