

AIDA PUSH PULL COUPLING HAN24


with power (5 pole) spring clamp + RJ45 fem/fem

with RJ45 and energy  
1 × RJ45, 8-pole metal, CAT5e (female/female)  
Combicon Power/spring clamp terminal, Push Pull  
Size 24

Link naar het product

Afbeelding



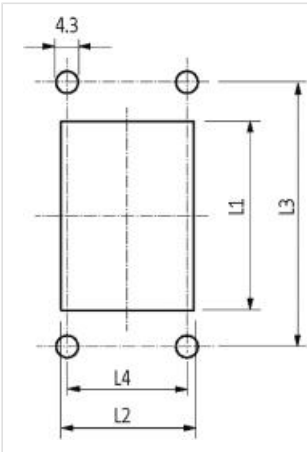

|                   |    |    |     |
|-------------------|----|----|-----|
| Size              |    | 6  | 24  |
| Wall cut-out      | L1 | 52 | 112 |
|                   | L2 | 35 | 35  |
| Distance of holes | L3 | 70 | 130 |
|                   | L4 | 32 | 32  |

Product van afwijken van afbeelding



Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143423      |
| ECLASS-6.1           | 27143423      |
| ECLASS-7.0           | 27449001      |
| ECLASS-8.0           | 27449001      |
| ECLASS-9.0           | 27440321      |
| ECLASS-10.1          | 27440321      |
| ECLASS-11.1          | 27440321      |
| ECLASS-12.0          | 27440321      |
| ETIM-5.0             | EC002625      |
| Douane tarief nummer | 85366990      |
| GTIN                 | 4048879031165 |
| Verpakkingseenheid   | 1             |

Device protection | Electrical

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP65 |
|-------------------------------------|------|

Mechanical data | Material data

|                  |    |
|------------------|----|
| Material housing | PA |
|------------------|----|

Mechanical data | Mounting data

|        |        |
|--------|--------|
| Height | 146 mm |
| Width  | 58 mm  |
| Depth  | 65 mm  |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 70 °C  |