



**M12 female recept. A-cod. shielded rear**

PVC 3x0.34 shielded bk UL/CSA 0.9m

Flange female  
M12, 3-pole  
shielded  
Rear mounting  
Further cable lengths on request.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

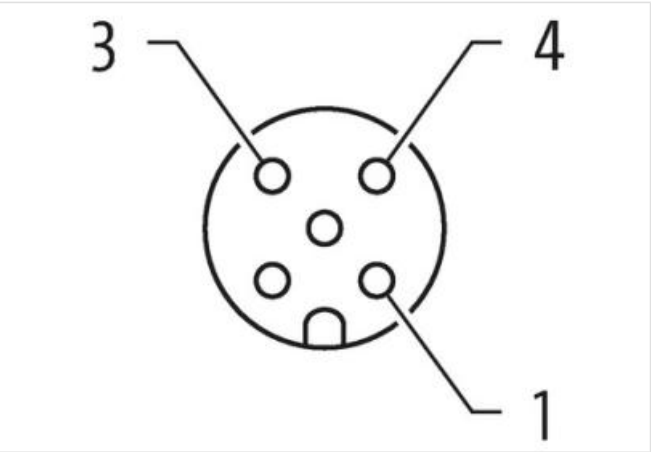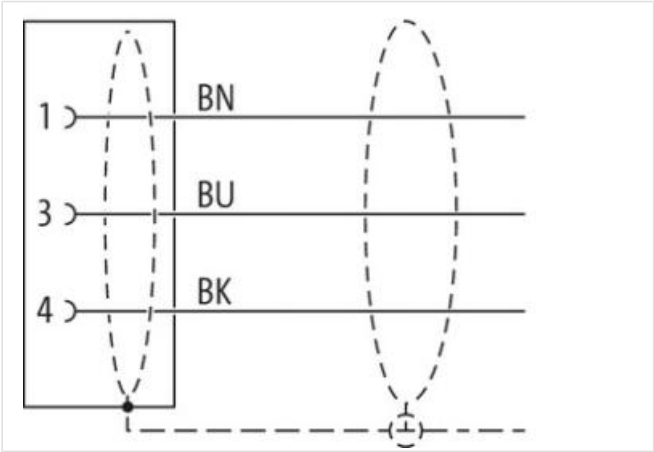

Product van afwijken van afbeelding



|                   |        |
|-------------------|--------|
| Cable length      | 0,9 m  |
| Side 1            |        |
| Tightening torque | 0,6 Nm |

|                                     |                   |
|-------------------------------------|-------------------|
| Mounting method                     | inserted, screwed |
| Coating contact                     | gold plated       |
| Family construction form            | M12               |
| Thread                              | M12 x 1           |
| Coding                              | A                 |
| Material contact                    | Copper alloy      |
| Material                            | Brass             |
| No. of poles                        | 3                 |
| Degree of protection (EN IEC 60529) | IP67              |

**Side 2**

|                           |             |
|---------------------------|-------------|
| Stripping length (jacket) | 20 mm       |
| Coating contact           | gold plated |

**Commerciële gegevens**

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27279220      |
| ECLASS-6.1           | 27279220      |
| ECLASS-7.0           | 27440103      |
| ECLASS-8.0           | 27440103      |
| ECLASS-9.0           | 27440103      |
| ECLASS-10.1          | 27440103      |
| ECLASS-11.1          | 27440103      |
| ECLASS-12.0          | 27440103      |
| ETIM-5.0             | EC001855      |
| Douane tarief nummer | 85444290      |
| GTIN                 | 4048879570596 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 60 V |
| Operating voltage DC max.          | 60 V |
| Current operating per contact max. | 4 A  |

**Diagnostics**

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

**Installation | Connection**

|                           |           |
|---------------------------|-----------|
| Stripping length (jacket) | 20 mm     |
| Mounting set              | M16 x 1.5 |
| Width across flats        | SW19      |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Protection NEMA                        | 3, 4, 6P          |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 1,5 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                           |               |
|---------------------------|---------------|
| Coating locking           | nickel plated |
| Coating of fitting        | nickel plated |
| Material gasket           | FKM           |
| Locking material          | Brass         |
| Material screw connection | Brass         |

**Mechanical data | Mounting data**

|                    |                |
|--------------------|----------------|
| Mounting method    | Schraubgewinde |
| Looking techniques | Schraubgewinde |

**Environmental characteristics | Climatic**

De informatie in dit datablad is met de grootst mogelijke zorg samengesteld.  
 Aansprakelijkheid beperkt tot grove nalatigheid voor de juistheid, volledigheid en actualiteit. Status: 2024-04-18

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

#### Approvals

|        |     |
|--------|-----|
| UL 50E | yes |
|--------|-----|

#### Installation | Cable

|                                                         |                                                      |
|---------------------------------------------------------|------------------------------------------------------|
| Cable identification                                    | 600                                                  |
| Cable Type                                              | 1                                                    |
| Jacket Color                                            | black                                                |
| Type of Certificate                                     | cURus                                                |
| Amount stranding                                        | 1                                                    |
| Stranding                                               | 3 wires twisted                                      |
| Cable shielding (type)                                  | copper braid, tinned                                 |
| Cable shielding (coverage)                              | 80 %                                                 |
| Banding                                                 | Fleece, Foil                                         |
| wire arrangement                                        | brown, black, blue                                   |
| Cable weight                                            | 52,8 g/m                                             |
| Material jacket                                         | PVC                                                  |
| Shore hardness jacket                                   | 85 ± 5 Shore A                                       |
| Freedom from ingredients (jacket)                       | lead-free, cadmium-free, CFC-free, silicone-free     |
| Outer-diameter (jacket)                                 | 5 mm                                                 |
| Tolerance outer diameter (sheath)                       | ± 5 %                                                |
| Material wire insulation                                | PVC                                                  |
| Amount wires                                            | 3                                                    |
| Outer diameter insulation                               | 1,25 mm                                              |
| Outer diameter tolerance core insulation                | ± 5 %                                                |
| Shore hardness wire insulation                          | 45 ± 5 Shore D                                       |
| Material properties wire insulation                     | good machinability                                   |
| Ingredient freeness wire insulation                     | lead-free, cadmium-free, CFC-free, silicone-free     |
| Amount strands (wire)                                   | 19                                                   |
| Diameter of single wires                                | 0,15 mm                                              |
| Conductor crosssection (wire)                           | 0,34 mm²                                             |
| Material conductor wire                                 | Stranded copper wire, bare                           |
| Conductor type (wire)                                   | Strand class 5                                       |
| Current load capacity (standard)                        | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                         | 6 A                                                  |
| Electrical resistance line constant wire                | 57 Ω/km @ 20 °C                                      |
| Nominal voltage power AC max.                           | 300 V                                                |
| AC withstand voltage power (wire - shield)              | 2 kV @ 60 s                                          |
| Power frequency withstand voltage power (wire - jacket) | 2 kV @ 60 s                                          |
| AC withstand voltage power (wire - wire)                | 2 kV @ 60 s                                          |
| Min. operating temperature (static)                     | -30 °C                                               |
| Max. operating temperature (fixed)                      | 80 °C                                                |
| Operating temperature min. (dynamic)                    | -5 °C                                                |
| Operating temperature max. (dynamic)                    | 80 °C                                                |
| UV resistance                                           | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                        | IEC 60332-2-2   UL 1581 § 1090   UL 1581 § 1100 FT2  |
| chemical resistance                                     | Good, application-related testing                    |
| Gasoline resistance                                     | Good, application-related testing                    |
| Oil resistance                                          | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)                                  | 10 x Outer diameter                                  |