

M12 female recept. A-kod. with cable rear

PVC 4x0.34 bk UL/CSA 10.0m


Flange female  
M12, 4-pole  
Rear mounting  
Further cable lengths on request.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding



|   |    |
|---|----|
| 1 | BN |
| 2 | WH |
| 3 | BU |
| 4 | BK |

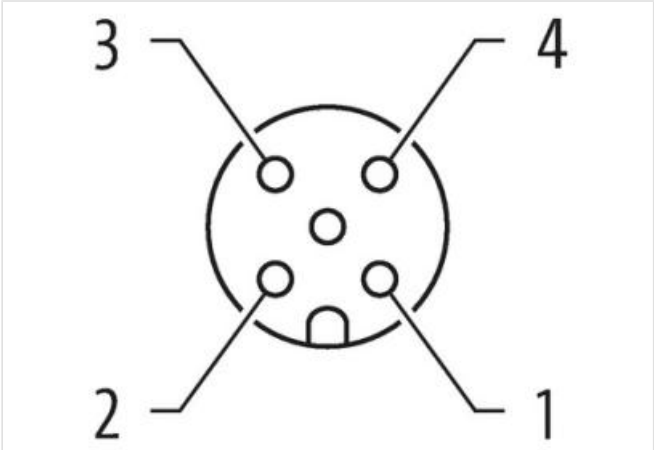

Product van afwijken van afbeelding



Cable length 10 m

Side 1

|                   |                   |
|-------------------|-------------------|
| Tightening torque | 0,6 Nm            |
| Mounting method   | inserted, screwed |

|                                     |              |
|-------------------------------------|--------------|
| Coating contact                     | gold plated  |
| Family construction form            | M12          |
| Thread                              | M12 x 1      |
| Coding                              | A            |
| Material contact                    | Copper alloy |
| Material                            | Brass        |
| No. of poles                        | 4            |
| Degree of protection (EN IEC 60529) | IP67         |

**Side 2**

|                           |       |
|---------------------------|-------|
| Stripping length (jacket) | 20 mm |
|---------------------------|-------|

**Commerciële gegevens**

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27279220      |
| ECLASS-6.1           | 27279220      |
| ECLASS-7.0           | 27440103      |
| ECLASS-8.0           | 27440103      |
| ECLASS-9.0           | 27440103      |
| ECLASS-10.1          | 27440103      |
| ECLASS-11.1          | 27440103      |
| ECLASS-12.0          | 27440103      |
| ETIM-5.0             | EC002061      |
| Douane tarief nummer | 85444290      |
| GTIN                 | 4065909002933 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC max.          | 250 V |
| Operating voltage DC max.          | 250 V |
| Current operating per contact max. | 4 A   |

**Diagnostics**

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

**Installation | Connection**

|                           |           |
|---------------------------|-----------|
| Stripping length (jacket) | 20 mm     |
| Mounting set              | M16 x 1.5 |
| Width across flats        | SW19      |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Protection NEMA                        | 3, 4, 6P          |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 2,5 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                           |               |
|---------------------------|---------------|
| Coating locking           | nickel plated |
| Coating of fitting        | nickel plated |
| Material gasket           | FKM           |
| Locking material          | Brass         |
| Material screw connection | Brass         |

**Mechanical data | Mounting data**

|                    |                |
|--------------------|----------------|
| Mounting method    | Schraubgewinde |
| Looking techniques | Schraubgewinde |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

Additional condition temperature range depending on cable quality

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

#### Approvals

|        |     |
|--------|-----|
| UL 50E | yes |
|--------|-----|

#### Installation | Cable

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Cable identification                              | 614                                                  |
| Cable Type                                        | 1                                                    |
| Jacket Color                                      | black                                                |
| Type of Certificate                               | cURus                                                |
| Amount stranding                                  | 1                                                    |
| Stranding                                         | 4 wires twisted                                      |
| wire arrangement                                  | brown, black, blue, white                            |
| Cable weight                                      | 40,7 g/m                                             |
| Material jacket                                   | PVC                                                  |
| Shore hardness jacket                             | 85 ± 5 Shore A                                       |
| Freedom from ingredients (jacket)                 | lead-free, cadmium-free, CFC-free, silicone-free     |
| Outer-diameter (jacket)                           | 5 mm                                                 |
| Tolerance outer diameter (sheath)                 | ± 5 %                                                |
| Material wire insulation                          | PVC                                                  |
| Amount wires                                      | 4                                                    |
| Outer diameter insulation                         | 1,25 mm                                              |
| Outer diameter tolerance core insulation          | ± 5 %                                                |
| Shore hardness wire insulation                    | 45 ± 5 Shore D                                       |
| Material properties wire insulation               | good machinability                                   |
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, silicone-free     |
| Amount strands (wire)                             | 19                                                   |
| Diameter of single wires                          | 0,15 mm                                              |
| Conductor crosssection (wire)                     | 0,34 mm²                                             |
| Material conductor wire                           | Stranded copper wire, bare                           |
| Conductor type (wire)                             | Strand class 5                                       |
| Nominal voltage AC max.                           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,8 A                                                |
| Electrical resistance line constant wire          | 57 Ω/km @ 20 °C                                      |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                          |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                          |
| Min. operating temperature (static)               | -30 °C                                               |
| Max. operating temperature (fixed)                | 80 °C                                                |
| Operating temperature min. (dynamic)              | -5 °C                                                |
| Operating temperature max. (dynamic)              | 80 °C                                                |
| UV resistance                                     | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                  | IEC 60332-2-2   UL 1581 § 1090   UL 1581 § 1100 FT2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)                            | 5 x Outer diameter                                   |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |