




SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24V LED+RC M16x1.5

Form A (18 mm)  
24 V AC/DC ±25%  
LED and RC  
metric  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

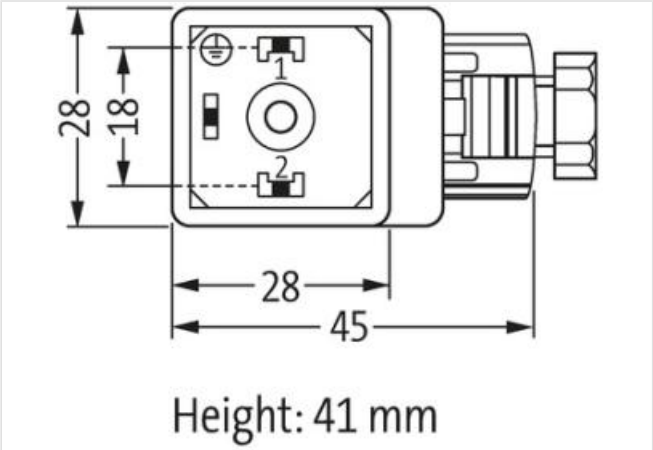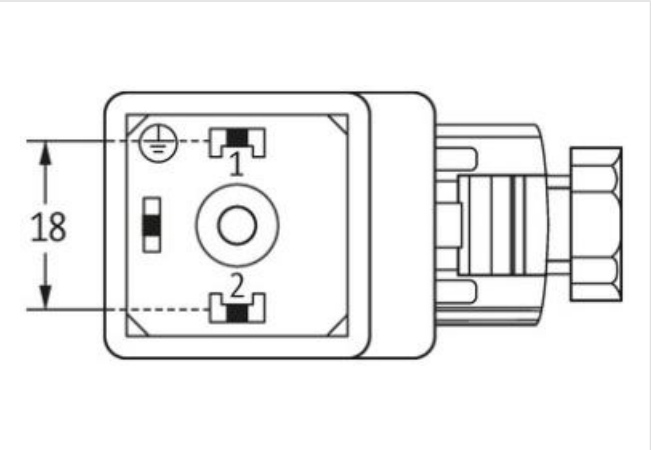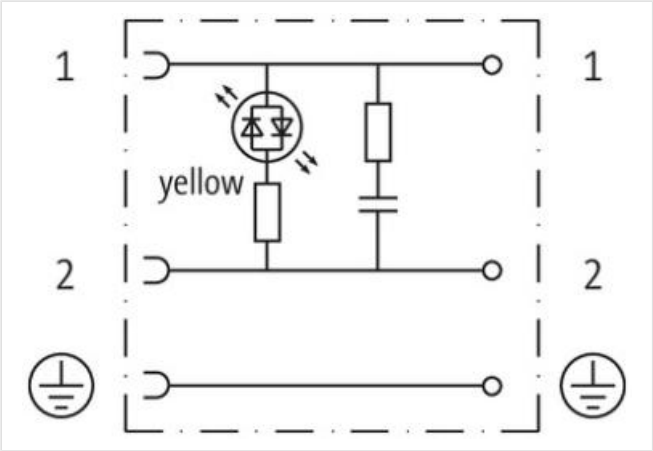

Product van afwijken van afbeelding

| Side 1                              |          |
|-------------------------------------|----------|
| Degree of protection (EN IEC 60529) | IP65     |
| Commerciële gegevens                |          |
| ECLASS-6.0                          | 27279221 |
| ECLASS-7.0                          | 27440104 |
| ECLASS-8.0                          | 27440104 |
| ECLASS-9.0                          | 27440102 |
| ECLASS-10.1                         | 27440105 |
| ECLASS-11.1                         | 27440105 |

|                                                 |                                                                                                                                                       |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| ECLASS-12.0                                     | 27440105                                                                                                                                              |
| ETIM-5.0                                        | EC002062                                                                                                                                              |
| Douane tarief nummer                            | 85366990                                                                                                                                              |
| GTIN                                            | 4048879187640                                                                                                                                         |
| Verpakkingseenheid                              | 1                                                                                                                                                     |
| <b>Electrical data   Supply</b>                 |                                                                                                                                                       |
| Operating voltage AC                            | 24 V                                                                                                                                                  |
| Operating voltage DC                            | 24 V                                                                                                                                                  |
| Current operating per contact max.              | 2 A                                                                                                                                                   |
| <b>Diagnostics</b>                              |                                                                                                                                                       |
| Status indication LED                           | yellow                                                                                                                                                |
| <b>Installation   Connection</b>                |                                                                                                                                                       |
| Tightening torque                               | 0,4 Nm                                                                                                                                                |
| Mounting set                                    | M3                                                                                                                                                    |
| <b>Installation   Pin assignment</b>            |                                                                                                                                                       |
| No. of poles                                    | 2 + PE                                                                                                                                                |
| <b>Device protection   Electrical</b>           |                                                                                                                                                       |
| Additional condition protection degree          | inserted, screwed                                                                                                                                     |
| <b>Environmental characteristics   Climatic</b> |                                                                                                                                                       |
| Operating temperature min.                      | -20 °C                                                                                                                                                |
| Operating temperature max.                      | 60 °C                                                                                                                                                 |
| <b>Important installation notes</b>             |                                                                                                                                                       |
| Note on strain relief                           | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                          | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |