

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24...230V LED M16x1.5

Form A (18 mm) for pressure switch

24...230 V AC/DC

LED red (2) green (3)




metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

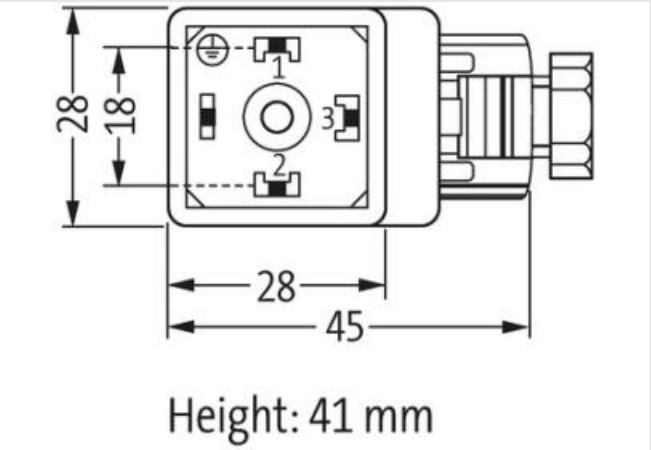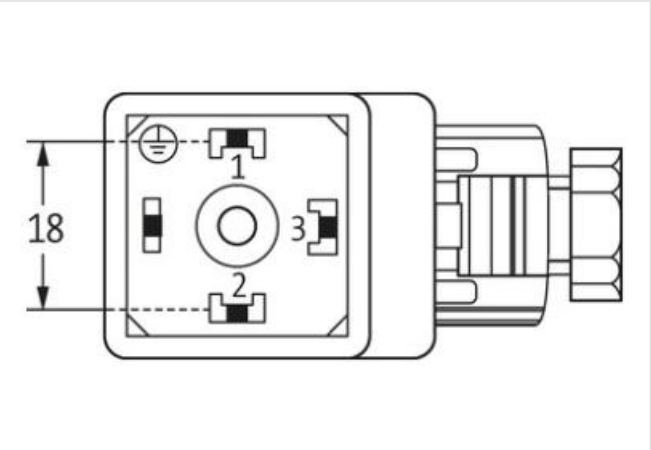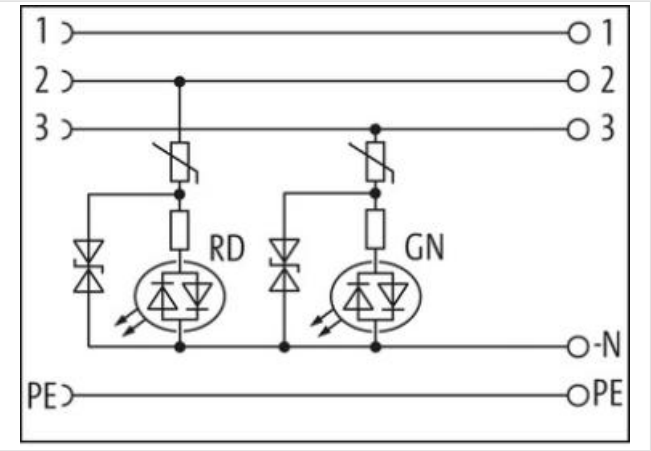

Product van afwijken van afbeelding



Side 1	
Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65
Commerciële gegevens	
ECLASS-6.0	27279221

ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002062
Douane tarief nummer	85366990
GTIN	4048879187503
Verpakkingseenheid	1
Electrical data Supply	
Operating voltage AC min.	24 V
Operating voltage AC max.	230 V
Operating voltage DC min.	24 V
Operating voltage DC max.	230 V
Current operating per contact max.	4 A
Diagnostics	
Status indication LED	green, red
Installation	
Connection cross section max.	1,5 mm ²
Installation Connection	
Tightening torque	0,4 Nm
Mounting set	M16 x 1.5
Installation Pin assignment	
No. of poles	3 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Pollution Degree	2
Rated surge voltage	4 kV
Material group (IEC 60664-1)	III
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	5 mm
Clamping range max.	10 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.