




SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

230V LED+VDR M16x1.5

Form B (10 mm)  
230 V AC/DC  $\pm 10\%$   
LED and VDR  
metric  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

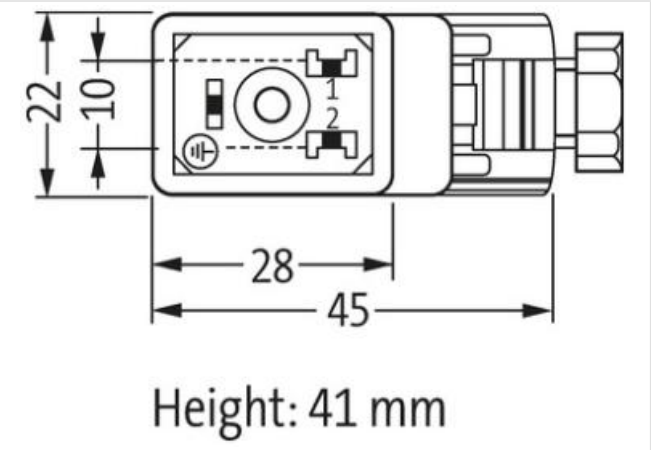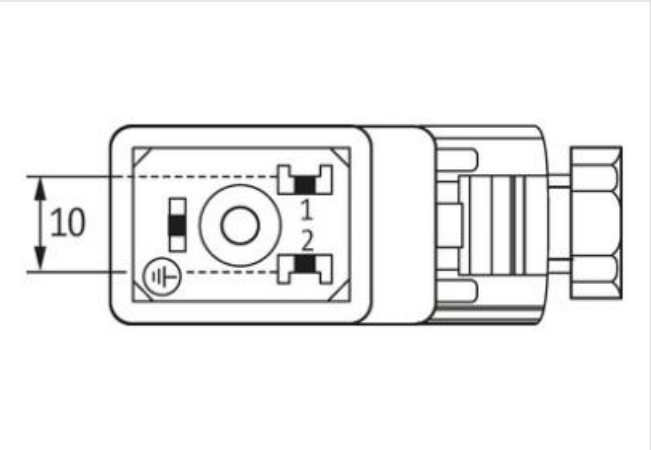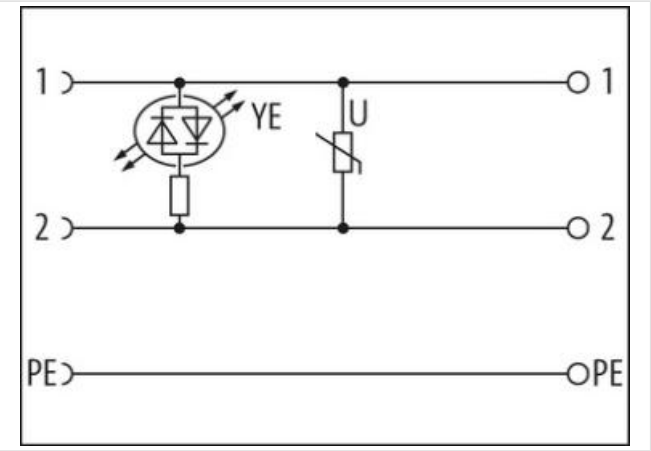

Product van afwijken van afbeelding

Side 1

Degree of protection (EN IEC 60529) IP65

Commerciële gegevens

|                      |          |
|----------------------|----------|
| ECLASS-6.0           | 27279221 |
| ECLASS-7.0           | 27440104 |
| ECLASS-8.0           | 27440104 |
| ECLASS-9.0           | 27440102 |
| ETIM-5.0             | EC002062 |
| Douane tarief nummer | 85366990 |

GTIN 4048879187275

Verpakkingseenheid 1

#### Electrical data

Capacity CX 15 ms

Holding power max. 100 W

#### Electrical data | Supply

Operating voltage AC 230 V

Operating voltage AC min. 207 V

Operating voltage AC max. 253 V

Operating voltage DC 230 V

Operating voltage DC min. 207 V

Operating voltage DC max. 253 V

Cut-off peak voltage max. 450 V

Current operating per contact max. 1 A

Current consumption max. 12 mA

#### Diagnostics

Status indication LED yellow

#### Installation

Connection cross section max. 1,5 mm<sup>2</sup>

#### Installation | Connection

Tightening torque 0,4 Nm

Mounting set M16 x 1.5

#### Device protection | Electrical

Additional condition protection degree inserted, locked, with screw connection

#### Mechanical data | Mounting data

fastening screw M3

Clamping range min. 5 mm

Clamping range max. 10 mm

#### Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C