

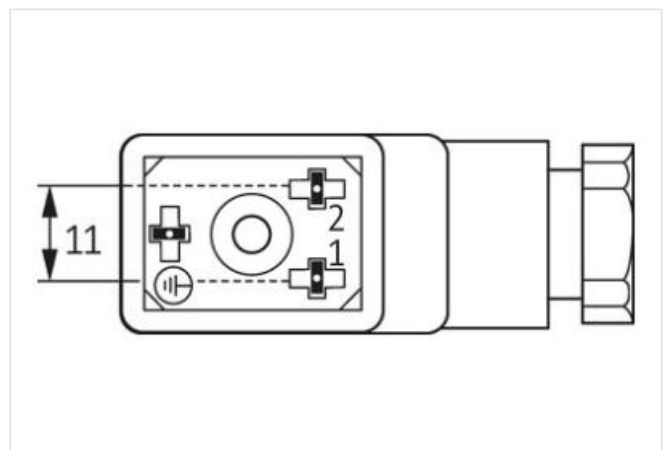
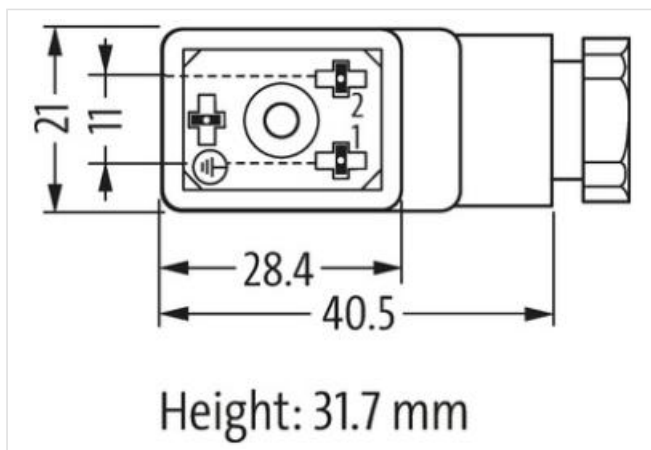
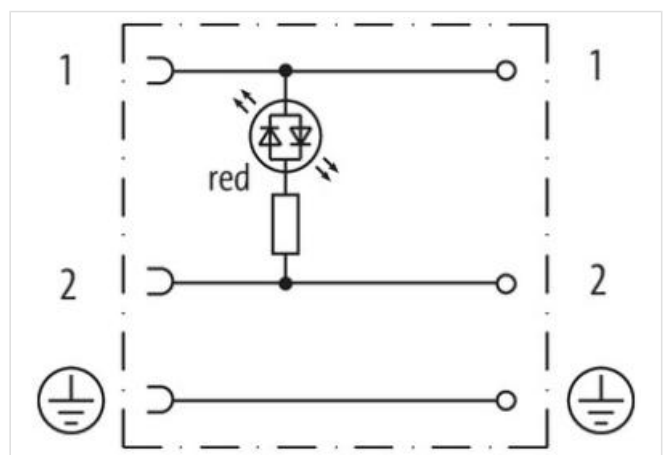
SVS ECO LED VALVE PLUG FORM B 11MM LED 24V

2+PE field-wireable M16x1.5

Form BI (11 mm)
 24 V AC/DC $\pm 15\%$
 LED and VDR
 metric
 field-wireable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)
Afbeelding


Product van afwijken van afbeelding


Side 1

Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65

Commerciële gegevens

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
Douane tarief nummer	85366990
GTIN	4048879187145
Verpakkingseenheid	1
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage AC min.	20,4 V
Operating voltage AC max.	26,4 V
Operating voltage DC	24 V
Operating voltage DC min.	20,4 V
Operating voltage DC max.	26,4 V
Current operating per contact max.	10 A
Diagnostics	
Status indication LED	red
Installation	
Connection cross section min.	0,5 mm ²
Connection cross section max.	1,5 mm ²
Installation Connection	
Tightening torque	0,4 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M16 x 1.5
Installation Pin assignment	
No. of poles	2 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Mechanical data Material data	
Color housing	opaque
Material gasket	NBR
Material housing	PA
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	6 mm
Clamping range max.	8 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	90 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.