




SVS VALVE PLUG FORM BI 11MM FIELD-WIREABLE

110V LED+VDR M16x1.5

Form BI (11 mm)
110 V AC/DC $\pm 10\%$
LED and VDR
metric
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

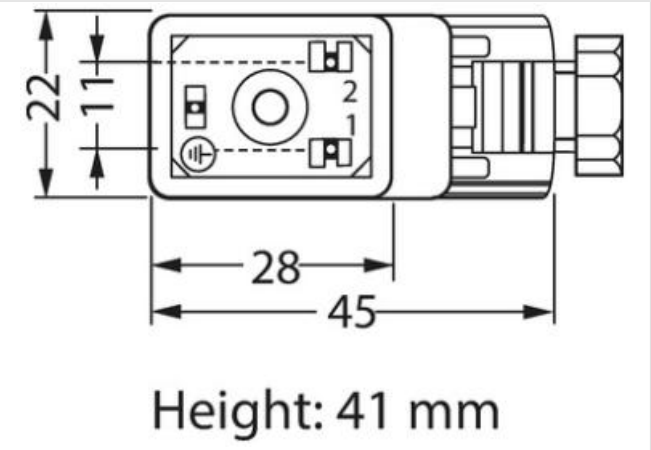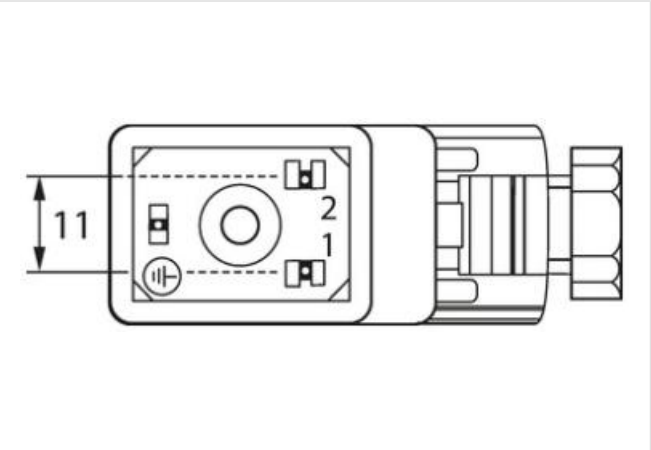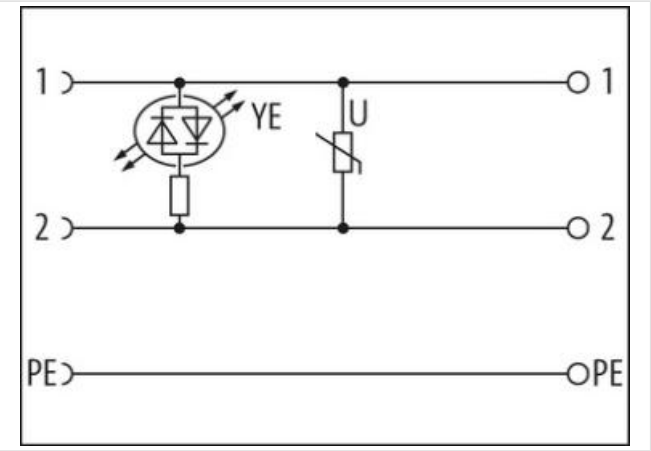

Product van afwijken van afbeelding

Side 1	
Degree of protection (EN IEC 60529)	IP65
Commerciële gegevens	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
Douane tarief nummer	85366990

GTIN 4048879187138

Verpakkingseenheid 1

Electrical data

Capacity CX 10 ms

Holding power max. 100 W

Electrical data | Supply

Operating voltage AC 110 V

Operating voltage AC min. 99 V

Operating voltage AC max. 121 V

Operating voltage DC 110 V

Operating voltage DC min. 99 V

Operating voltage DC max. 121 V

Cut-off peak voltage max. 250 V

Current consumption max. 12 mA

Diagnostics

Status indication LED yellow

Installation

 Connection cross section max. 1,5 mm²
Installation | Connection

Tightening torque 0,4 Nm

Mounting set M16 x 1.5

Device protection | Electrical

Additional condition protection degree inserted, locked, with screw connection

Mechanical data | Mounting data

fastening screw M3

Clamping range min. 5 mm

Clamping range max. 10 mm

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C