

**M12 male 0° / M8 female 90° A-cod. LED**

PUR 4x0.25 gy UL/CSA+drag ch. 0.8m

Male straight – female 90°

M12 – M8, 4-pole

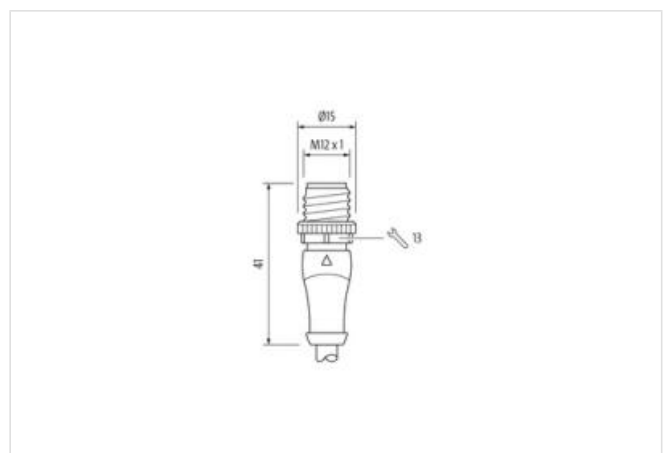
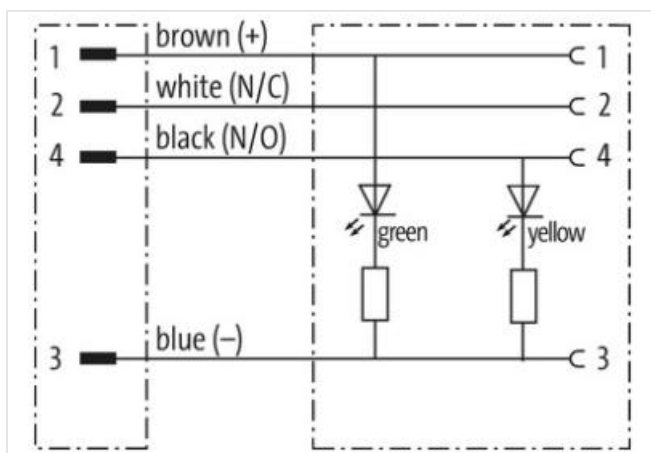
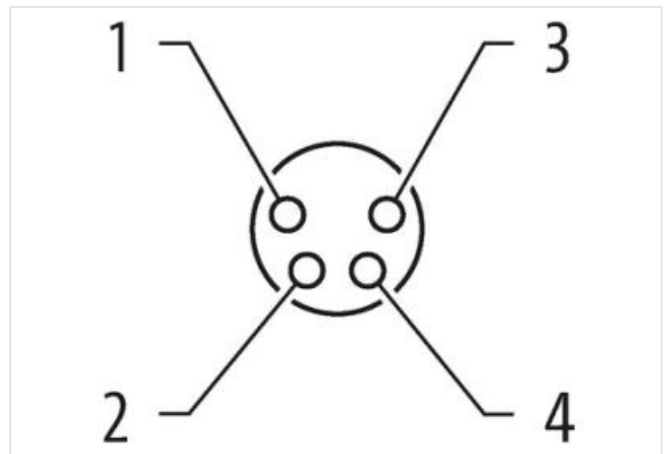
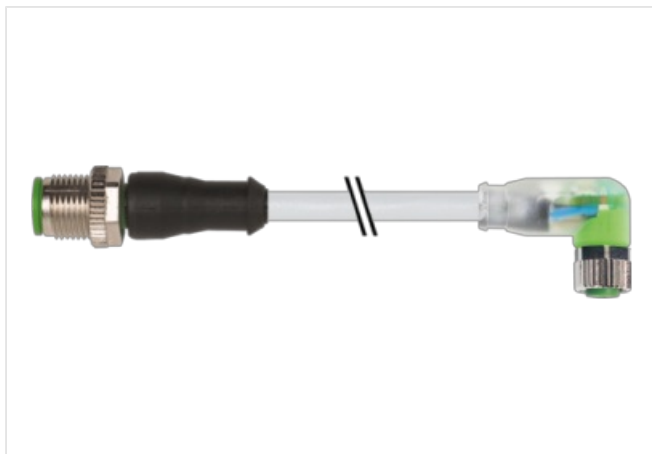
2× LED (PNP), (NPN) on request

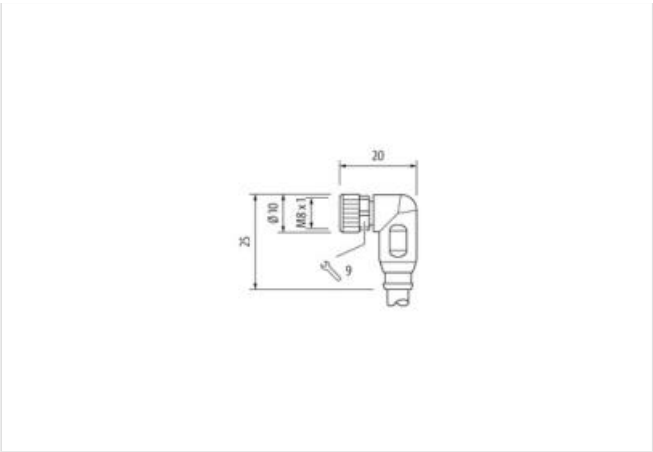
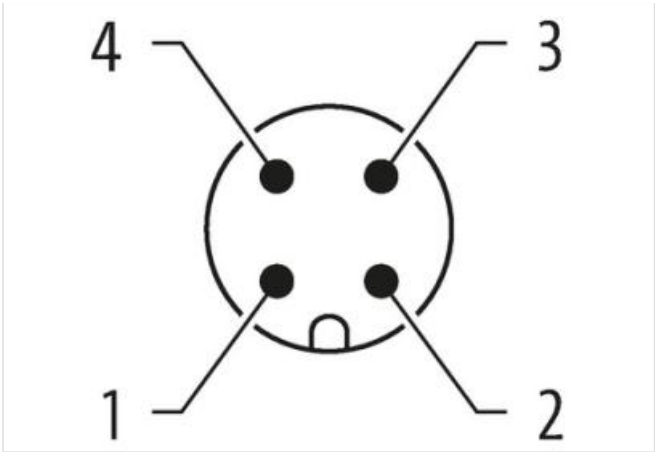
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

[Link naar het product](#)**Afbeelding**



Product van afwijken van afbeelding



|                                           |                   |
|-------------------------------------------|-------------------|
| Cable length                              | 0,8 m             |
| Side 1                                    |                   |
| Tightening torque                         | 0,6 Nm            |
| Mounting method                           | inserted, screwed |
| Family construction form                  | M12               |
| Thread                                    | M12 x 1           |
| suitable for corrugated tube (internal Ø) | 10 mm             |
| Coding                                    | A                 |
| Material                                  | PUR               |
| Width across flats                        | SW13              |
| Degree of protection (EN IEC 60529)       | IP66K, IP67       |
| Side 2                                    |                   |
| Tightening torque                         | 0,4 Nm            |
| Mounting method                           | inserted, screwed |
| Family construction form                  | M8                |
| Thread                                    | M8 x 1            |
| suitable for corrugated tube (internal Ø) | 6,5 mm            |
| Coding                                    | A                 |
| Material                                  | PUR               |
| Width across flats                        | SW9               |
| Degree of protection (EN IEC 60529)       | IP66K, IP67       |
| Commerciële gegevens                      |                   |
| ECLASS-6.0                                | 27061801          |
| ECLASS-6.1                                | 27279218          |
| ECLASS-7.0                                | 27279218          |
| ECLASS-8.0                                | 27279218          |
| ECLASS-9.0                                | 27060311          |
| ECLASS-10.1                               | 27060311          |
| ECLASS-11.1                               | 27060311          |
| ECLASS-12.0                               | 27060311          |
| ETIM-5.0                                  | EC001855          |
| Douane tarief nummer                      | 85444290          |

GTIN 4048879909938

Verpakkingseenheid 1

#### Electrical data | Supply

Operating voltage DC 24 V  
 Operating voltage DC min. 18 V  
 Operating voltage DC max. 30 V  
 Operating voltage DC max. (UL-listed) 30 V  
 Current operating per contact max. 4 A

#### Diagnostics

Status indication LED green, yellow

#### Device protection | Electrical

Additional condition protection degree inserted, screwed  
 Pollution Degree 3  
 Rated surge voltage 0,8 kV  
 Material group (IEC 60664-1) I

#### Mechanical data | Material data

Coating locking Nickeled  
 Coating of fitting nickel plated  
 Locking material Zinc die-casting  
 Material screw connection Zinc die-casting

#### Mechanical data | Mounting data

Mounting method inserted, screwed, Shaking protection

#### Environmental characteristics | Climatic

Operating temperature min. -25 °C  
 Operating temperature max. 80 °C  
 Additional condition temperature range depending on cable quality

#### Important installation notes

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  
 Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

#### Conformity

Product standard DIN EN 61076-2-101 (M12), DIN EN 61076-2-114 (M8)

#### Installation | Cable

Cable identification 231  
 Cable Type 3  
 Jacket Color gray  
 Type of Certificate cURus  
 Amount stranding 1  
 Stranding 4 wires twisted  
 wire arrangement brown, black, blue, white  
 Traversing distance (C-track) 10 m @ 25 °C | horizontal  
 Cable weight 33 g/m  
 Material jacket PUR  
 Shore hardness jacket 90 ± 5 Shore A  
 Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, halogen-free, silicone-free  
 Outer-diameter (jacket) 4,5 mm  
 Tolerance outer diameter (sheath) ± 5 %  
 Material wire insulation PP  
 Amount wires 4  
 Outer diameter insulation 1,25 mm  
 Outer diameter tolerance core insulation ± 5 %

|                                                   |                                                                |
|---------------------------------------------------|----------------------------------------------------------------|
| Shore hardness wire insulation                    | 70 ± 5 Shore D                                                 |
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Amount strands (wire)                             | 32                                                             |
| Diameter of single wires                          | 0,1 mm                                                         |
| Conductor crosssection (wire)                     | 0,25 mm²                                                       |
| Material conductor wire                           | Stranded copper wire, bare                                     |
| Conductor type (wire)                             | strand class 6                                                 |
| Nominal voltage AC max.                           | 300 V                                                          |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                              |
| Current load capacity min. wire                   | 3,6 A                                                          |
| Electrical resistance line constant wire          | 79 Ω/km @ 20 °C                                                |
| AC withstand voltage (wire - wire)                | 2,5 kV @ 60 s                                                  |
| Power frequency withstand voltage (wire - jacket) | 2,5 kV @ 60 s                                                  |
| Min. operating temperature (static)               | -40 °C                                                         |
| Max. operating temperature (fixed)                | 80 °C / 90 °C @ 10000 h Operation                              |
| Operating temperature min. (dynamic)              | -25 °C                                                         |
| Operating temperature max. (dynamic)              | 80 °C / 90 °C @ 10000 h Operation                              |
| Flame resistance                                  | IEC 60332-2-2   UL 1581 § 1090   UL 1581 § 1100 FT2            |
| chemical resistance                               | Good, application-related testing                              |
| Gasoline resistance                               | Good, application-related testing                              |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404           |
| Bending radius (fixed)                            | 5 x Outer diameter                                             |
| Bending radius (dynamic)                          | 10 x Outer diameter                                            |
| Travel speed (C-track)                            | 10 Mio. @ 25 °C                                                |
| No. of torsion cycles                             | 2 Mio.                                                         |
| Torsion stress                                    | ± 180 °/m                                                      |
| Torsion speed                                     | 35 cycles/min                                                  |