

**T-Coupler SlimLine M12 male / 2x M12 female A-cod.**

5-pol. / 2x 3-pol.

T-coupler (Slim Line)

Male straight – females straight

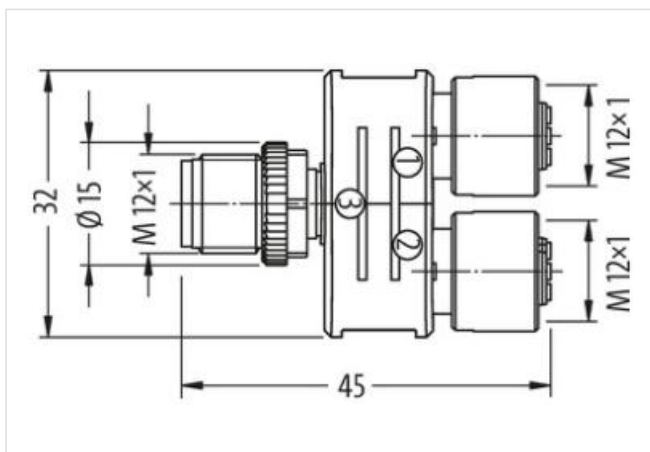
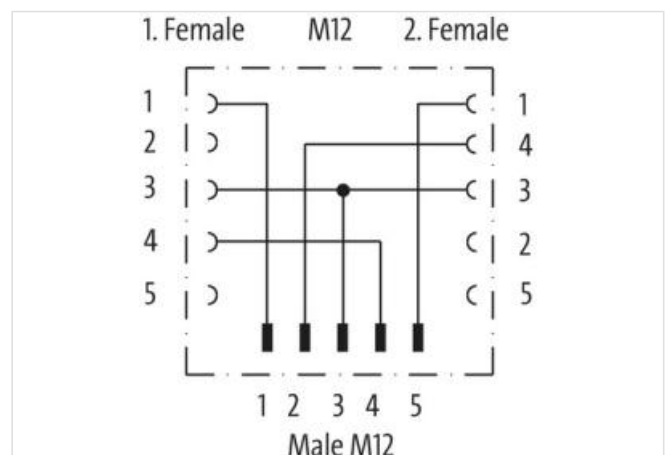
M12 – M12, 5-pole

Distribution function (NO)

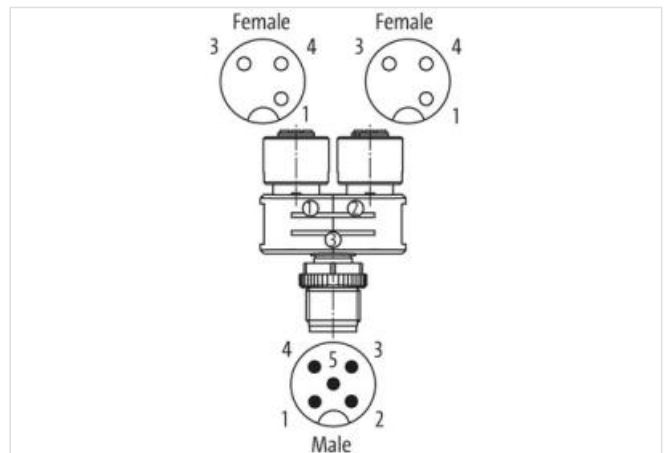
Safety

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)**Afbeelding**

Product van afwijken van afbeelding

**Side 1**

Degree of protection (EN IEC 60529)

IP67

**Side 2**

Degree of protection (EN IEC 60529)

IP67

**Commerciële gegevens**

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143423      |
| ECLASS-6.1           | 27279221      |
| ECLASS-7.0           | 27440104      |
| ECLASS-8.0           | 27440104      |
| ECLASS-9.0           | 27440106      |
| ECLASS-10.1          | 27440106      |
| ECLASS-11.1          | 27440106      |
| ECLASS-12.0          | 27440106      |
| ETIM-5.0             | EC002062      |
| Douane tarief nummer | 85366990      |
| GTIN                 | 4048879404167 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 60 V |
| Operating voltage DC max.          | 60 V |
| Operating voltage AC (UL-listed)   | 30 V |
| Operating voltage DC (UL-listed)   | 30 V |
| Current operating per contact max. | 4 A  |

**Installation | Connection**

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |