




Adaptor M12 male on top / MSUD valve plug A-18mm

3-pol. A-cod.

Form A (18 mm) – M12, connector top entry  
24 V AC/DC  $\pm 25\%$   
LED (yellow)  
3-pole  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

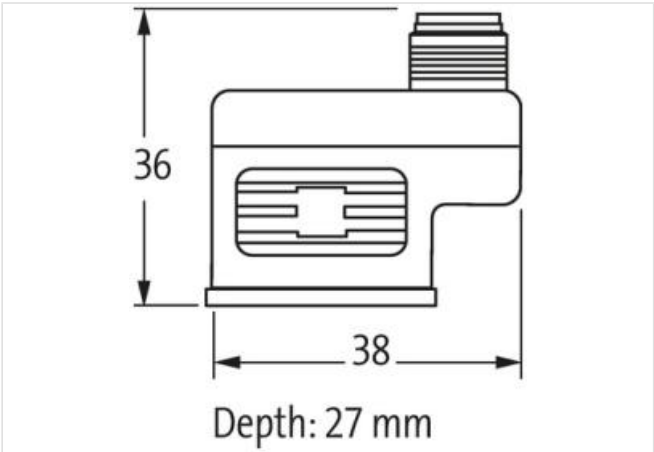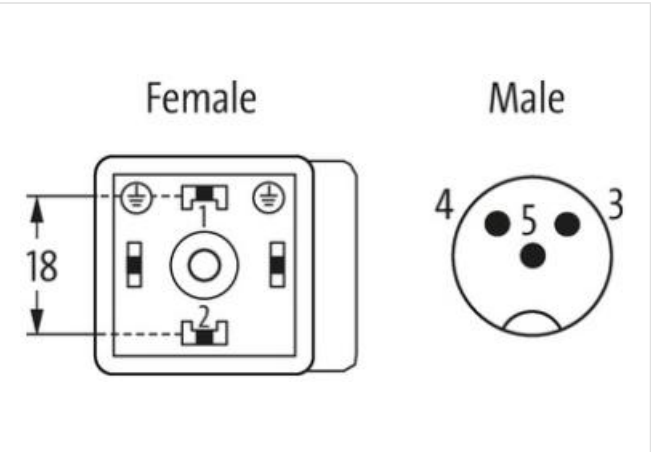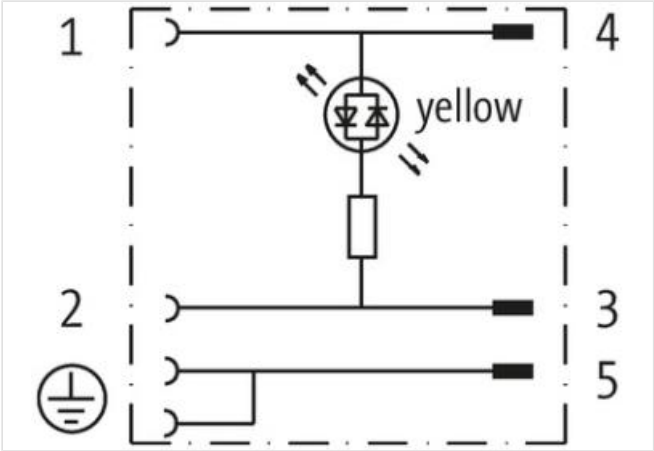

Product van afwijken van afbeelding



| Side 1                   |                   |
|--------------------------|-------------------|
| Tightening torque        | 0,4 Nm            |
| Mounting method          | inserted, screwed |
| Family construction form | MSUD              |
| Side 2                   |                   |

|                          |                   |
|--------------------------|-------------------|
| Tightening torque        | 0,6 Nm            |
| Mounting method          | inserted, screwed |
| Family construction form | M12               |

#### Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143423      |
| ECLASS-6.1           | 27279221      |
| ECLASS-7.0           | 27440104      |
| ECLASS-8.0           | 27440104      |
| ECLASS-9.0           | 27440106      |
| ECLASS-10.1          | 27440106      |
| ECLASS-11.1          | 27440106      |
| ECLASS-12.0          | 27440106      |
| ETIM-5.0             | EC001855      |
| Douane tarief nummer | 85366990      |
| GTIN                 | 4048879144711 |
| Verpakkingseenheid   | 1             |

#### Electrical data | Supply

|                                    |      |
|------------------------------------|------|
| Operating voltage AC               | 24 V |
| Operating voltage AC min.          | 18 V |
| Operating voltage AC max.          | 30 V |
| Operating voltage DC               | 24 V |
| Operating voltage DC min.          | 18 V |
| Operating voltage DC max.          | 30 V |
| Current operating per contact max. | 4 A  |

#### Diagnostics

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

#### Installation | Connection

|              |    |
|--------------|----|
| Mounting set | M3 |
|--------------|----|

#### Installation | Pin assignment

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |