




Adaptor M12 male on rear / MSUD valve plug A-18mm

3-pol. A-cod.

Form A (18 mm) – M12, connector at the rear  
max. 110 V AC/DC  
without components  
3-pole  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

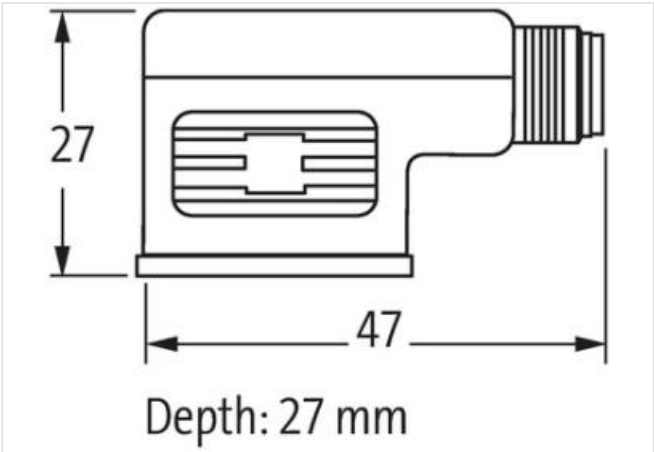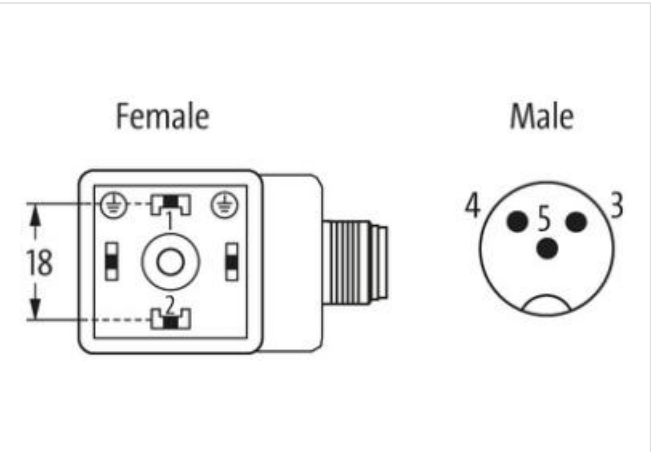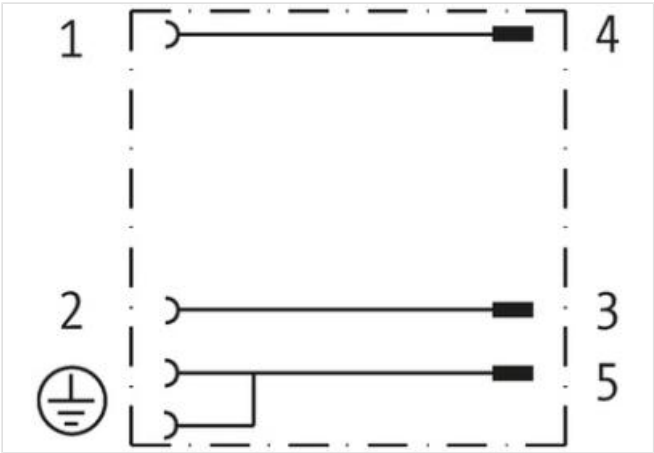

Product van afwijken van afbeelding



| Side 1                   |        |
|--------------------------|--------|
| Tightening torque        | 0,4 Nm |
| Family construction form | MSUD   |
| Side 2                   |        |
| Tightening torque        | 0,6 Nm |

Family construction form M12

#### Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143423      |
| ECLASS-6.1           | 27279221      |
| ECLASS-7.0           | 27440104      |
| ECLASS-8.0           | 27440104      |
| ECLASS-9.0           | 27440106      |
| ECLASS-10.1          | 27440106      |
| ECLASS-11.1          | 27440106      |
| ECLASS-12.0          | 27440106      |
| ETIM-5.0             | EC001855      |
| Douane tarief nummer | 85366990      |
| GTIN                 | 4048879144643 |
| Verpakkingseenheid   | 1             |

#### Electrical data | Supply

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC max.          | 110 V |
| Operating voltage DC max.          | 110 V |
| Current operating per contact max. | 4 A   |

#### Installation | Connection

|              |    |
|--------------|----|
| Mounting set | M3 |
|--------------|----|

#### Installation | Pin assignment

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Rated surge voltage                    | 1,5 kV            |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |