

**M8 male 90° / M8 female 90° A-cod. LED**

PUR 3x0.25 bk UL/CSA+robot+drag ch. 1m

Male 90° – female 90°

M8 – M8, 3-pole

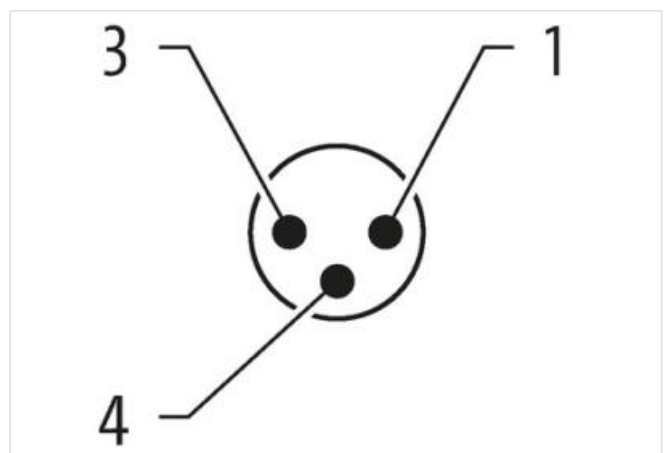
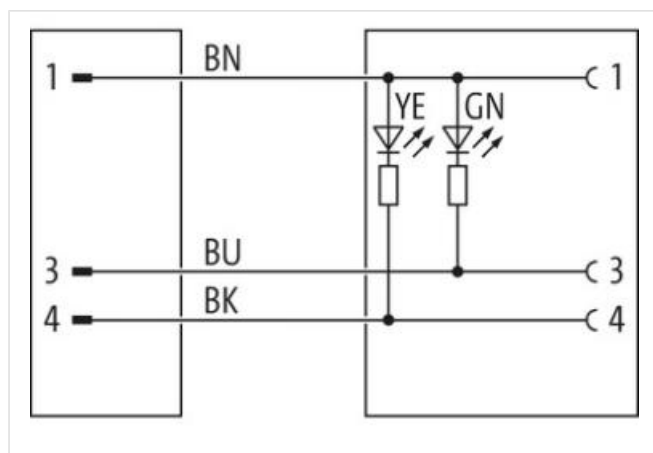
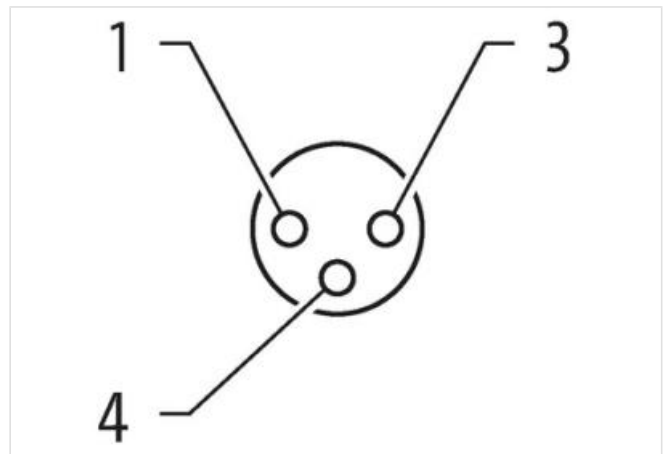
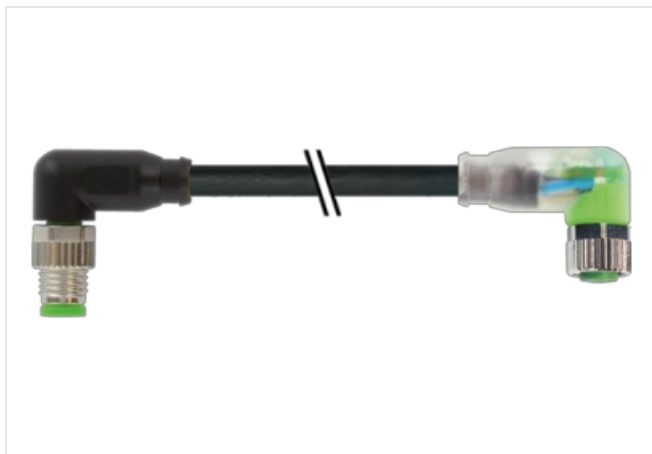
2× LED (PNP), (NPN) on request

Art-No. 7005 - M8 Lite - (plastic hexagonal screw) on request

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)**Afbeelding**



Product van afwijken van afbeelding



Cable length 1 m

Side 1

Tightening torque 0,4 Nm  
Family construction form M8  
Thread M8 x 1  
suitable for corrugated tube (internal Ø) 6,5 mm  
Width across flats SW9

Side 2

Tightening torque 0,4 Nm  
Thread M8 x 1

Commerciële gegevens

ECLASS-6.0 27061801  
Douane tarief nummer 85444290  
Verpakkingseenheid 1

Electrical data | Supply

Operating voltage DC 24 V  
Operating voltage DC min. 18 V  
Operating voltage DC max. 30 V  
Operating voltage DC max. (UL-listed) 30 V  
Current operating per contact max. 4 A

Diagnostics

Status indication LED green, yellow

Device protection | Electrical

Degree of protection (EN IEC 60529) IP65, IP67, IP68, IP66K  
Additional condition protection degree inserted, screwed  
Pollution Degree 3  
Rated surge voltage 0,8 kV  
Material group (IEC 60664-1) I

Mechanical data | Material data

Coating locking safe-cover coated  
Material housing PUR



|                          |                     |
|--------------------------|---------------------|
| Bending radius (dynamic) | 10 x Outer diameter |
| No. of torsion cycles    | 1 Mio.              |
| Torsion speed            | 35 cycles/min       |
| Torsion stress           | ± 360 °/m           |