

Adapter M12 male/ female B-cod. / D-Sub 9-pol. 90°

Shielded, 12Mbit/s


PROFIBUS
Bus connection plug 90°
SUB-D9 (male); M12× 1 mm, B-coded
Programming device

[Link naar het product](#)

Afbeelding



Product van afwijken van afbeelding

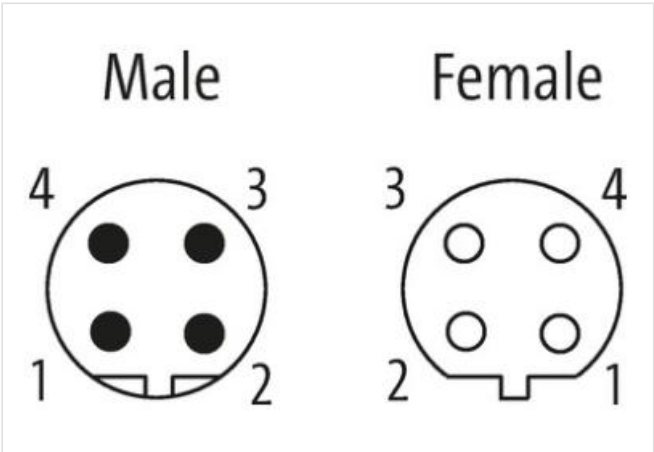

Commerciële gegevens	
ECLASS-6.0	27061801
ECLASS-7.0	27061801
ECLASS-8.0	27061801
ECLASS-9.0	27061801
ECLASS-10.1	27242692
ECLASS-11.1	27242692
ECLASS-12.0	27242692
ETIM-5.0	EC001855
Douane tarief nummer	85366990
GTIN	4048879303637
Verpakkingseenheid	1
Electrical data	
Terminating resistor	connectable, integrated
Electrical data Supply	
Operating voltage DC min.	4,75 V
Operating voltage DC max.	5,25 V
Current consumption max.	12,5 mA
Industrial communication	
Data transmission rate max.	12 MBit/s
Installation Connection	
Family construction form	M12
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP30
Mechanical data Mounting data	

Height	59 mm
Width	45 mm
Depth	17 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	70 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.