

**M12 Power male 0° / female 0° T-cod.**

PUR 4x1.5 bk UL/CSA+drag ch. 19m

Power

Male straight – female straight

M12 – M12, 4-pole



T-coded




with cable sleeves

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

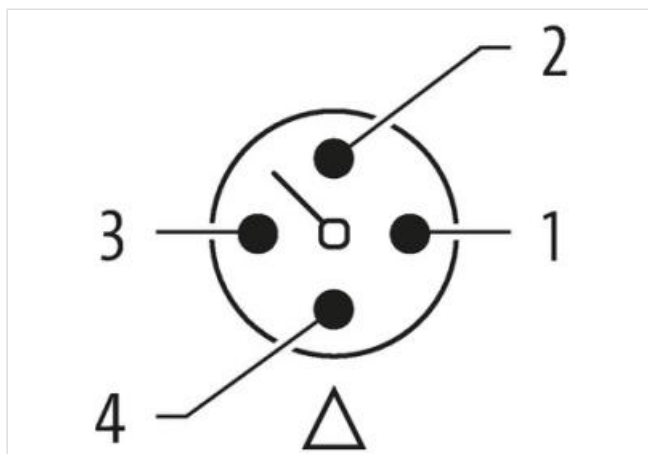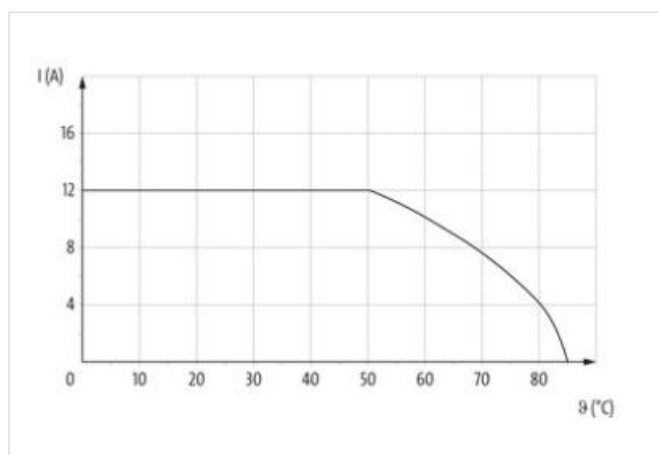[Link naar het product](#)**Afbeelding**

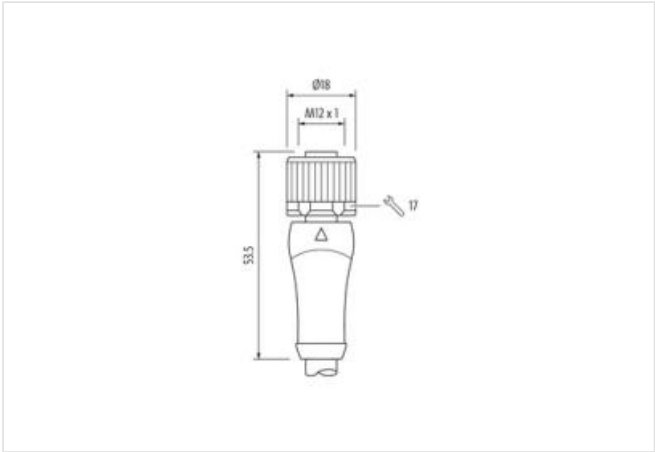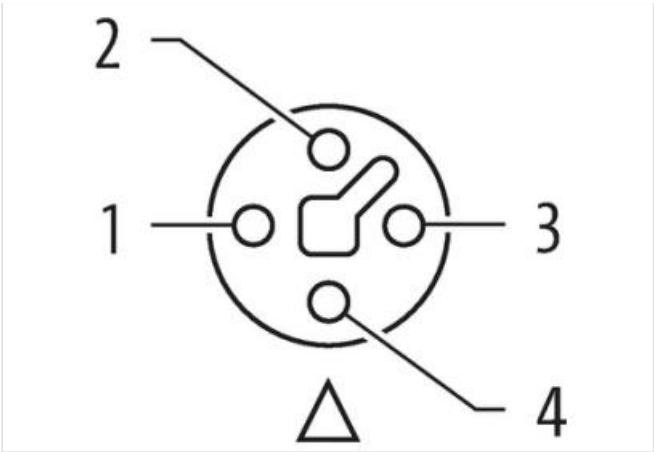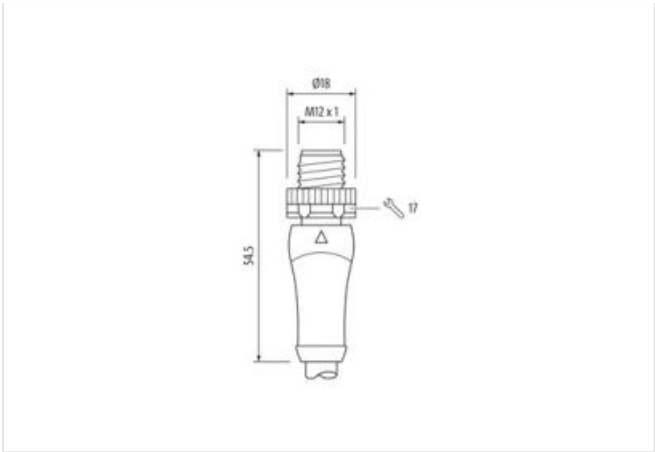

Product van afwijken van afbeelding



Cable length19 m

Side 1

|                                           |              |
|-------------------------------------------|--------------|
| Tightening torque                         | 0,6 Nm       |
| Coating contact                           | gold plated  |
| Family construction form                  | M12P         |
| Thread                                    | M12 x 1      |
| suitable for corrugated tube (internal Ø) | 12 mm        |
| Coding                                    | T            |
| Material contact                          | Copper alloy |
| No. of poles                              | 4            |

Side 2

|                          |              |
|--------------------------|--------------|
| Tightening torque        | 0,6 Nm       |
| Coating contact          | gold plated  |
| Family construction form | M12P         |
| Thread                   | M12 x 1      |
| Coding                   | T            |
| Material contact         | Copper alloy |
| No. of poles             | 4            |

| Commerciële gegevens                     |                                                                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| ECLASS-6.0                               | 27279218                                                                                                                                              |
| ECLASS-6.1                               | 27279218                                                                                                                                              |
| ECLASS-7.0                               | 27279218                                                                                                                                              |
| ECLASS-8.0                               | 27279218                                                                                                                                              |
| ECLASS-9.0                               | 27060327                                                                                                                                              |
| ECLASS-10.1                              | 27060311                                                                                                                                              |
| ECLASS-11.1                              | 27060311                                                                                                                                              |
| ECLASS-12.0                              | 27060327                                                                                                                                              |
| ETIM-5.0                                 | EC001855                                                                                                                                              |
| Douane tarief nummer                     | 85444290                                                                                                                                              |
| GTIN                                     | 4048879842068                                                                                                                                         |
| Verpakkingseenheid                       | 1                                                                                                                                                     |
| Electrical data   Supply                 |                                                                                                                                                       |
| Operating voltage DC max.                | 63 V                                                                                                                                                  |
| Current operating per contact max.       | 12 A                                                                                                                                                  |
| Diagnostics                              |                                                                                                                                                       |
| Status indication LED                    | no                                                                                                                                                    |
| Installation   Connection                |                                                                                                                                                       |
| Width across flats                       | SW17                                                                                                                                                  |
| Device protection   Electrical           |                                                                                                                                                       |
| Degree of protection (EN IEC 60529)      | IP65, IP67                                                                                                                                            |
| Additional condition protection degree   | inserted, screwed                                                                                                                                     |
| Pollution Degree                         | 3                                                                                                                                                     |
| Rated surge voltage                      | 1,5 kV                                                                                                                                                |
| Material group (IEC 60664-1)             | I                                                                                                                                                     |
| Mechanical data   Material data          |                                                                                                                                                       |
| Coating locking                          | Nickeled                                                                                                                                              |
| Material gasket                          | FKM                                                                                                                                                   |
| Material housing                         | PUR                                                                                                                                                   |
| Locking material                         | Zinc die-casting                                                                                                                                      |
| Mechanical data   Mounting data          |                                                                                                                                                       |
| Mounting method                          | inserted, screwed, Shaking protection                                                                                                                 |
| Environmental characteristics   Climatic |                                                                                                                                                       |
| Operating temperature min.               | -25 °C                                                                                                                                                |
| Operating temperature max.               | 85 °C                                                                                                                                                 |
| Additional condition temperature range   | depending on cable quality                                                                                                                            |
| Important installation notes             |                                                                                                                                                       |
| Note on strain relief                    | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                   | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| Conformity                               |                                                                                                                                                       |
| Product standard                         | IEC 61076-2-111                                                                                                                                       |
| Installation   Cable                     |                                                                                                                                                       |
| wire arrangement                         | white 4, white 3, white 2, white 1                                                                                                                    |
| Cable identification                     | 782                                                                                                                                                   |
| Printing color of wire insulation        | black (white isolation)                                                                                                                               |
| Jacket Color                             | black                                                                                                                                                 |
| Type of Certificate                      | cURus                                                                                                                                                 |
| Amount stranding                         | 1                                                                                                                                                     |
| Stranding                                | 4 wires around Core filler twisted                                                                                                                    |

|                                                   |                                                             |
|---------------------------------------------------|-------------------------------------------------------------|
| Filler                                            | yes                                                         |
| wire arrangement                                  | white 4, white 3, white 2, white 1                          |
| Cable weight                                      | 114,4 g/m                                                   |
| Material jacket                                   | PUR                                                         |
| Shore hardness jacket                             | 90 Shore A                                                  |
| Freedom from ingredients (jacket)                 | lead-free, CFC-free, halogen-free, silicone-free, LABS-free |
| Outer-diameter (jacket)                           | 7,7 mm                                                      |
| Tolerance outer diameter (sheath)                 | ± 5 %                                                       |
| Material wire insulation                          | PP                                                          |
| Amount wires                                      | 4                                                           |
| Outer diameter insulation                         | 2,35 mm                                                     |
| Outer diameter tolerance core insulation          | ± 5 %                                                       |
| Shore hardness wire insulation                    | 70 Shore A                                                  |
| Ingredient freeness wire insulation               | lead-free, CFC-free, halogen-free, silicone-free, LABS-free |
| Printing color of wire insulation                 | black (white isolation)                                     |
| Amount strands (wire)                             | 84                                                          |
| Diameter of single wires                          | 0,15 mm                                                     |
| Conductor crosssection (wire)                     | 1,5 mm <sup>2</sup>                                         |
| Material conductor wire                           | Stranded copper wire, bare                                  |
| Conductor type (wire)                             | strand class 6                                              |
| Nominal voltage AC max.                           | 300 V                                                       |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                           |
| Current load capacity min. wire                   | 14,4 A                                                      |
| Electrical resistance line constant wire          | 13,3 Ω/km @ 20 °C                                           |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                                 |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                                 |
| Isolation resistance                              | 500 MΩ × km                                                 |
| Min. operating temperature (static)               | -40 °C                                                      |
| Max. operating temperature (fixed)                | 80 °C                                                       |
| Operating temperature min. (dynamic)              | -30 °C                                                      |
| Operating temperature max. (dynamic)              | 80 °C                                                       |
| UV resistance                                     | DIN EN ISO 4892-2 A                                         |
| Flame resistance                                  | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2         |
| chemical resistance                               | Good, application-related testing                           |
| Gasoline resistance                               | Good, application-related testing                           |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing        |
| Bending radius (fixed)                            | 5 x Outer diameter                                          |
| Bending radius (dynamic)                          | 10 x Outer diameter                                         |
| No. of bending cycles (C-track)                   | 5 Mio. @ 25 °C                                              |
| Traversing distance (C-track)                     | 5 m @ 25 °C   vertical                                      |
| Travel speed (C-track)                            | 3,3 m/s                                                     |
| No. of torsion cycles                             | 2 Mio.                                                      |
| Torsion stress                                    | ± 180 °/m                                                   |
| Torsion speed                                     | 35 cycles/min                                               |