



7/8" female 0° IDC V2A

5-pol., 0,75 - 1,5mm², 6,8 - 12,5mm

Female straight
7/8" (5-pole)
IDC terminals
Connection cross section: 0.75...1.5 mm²
Stainless steel 1.4305 (V2A)
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

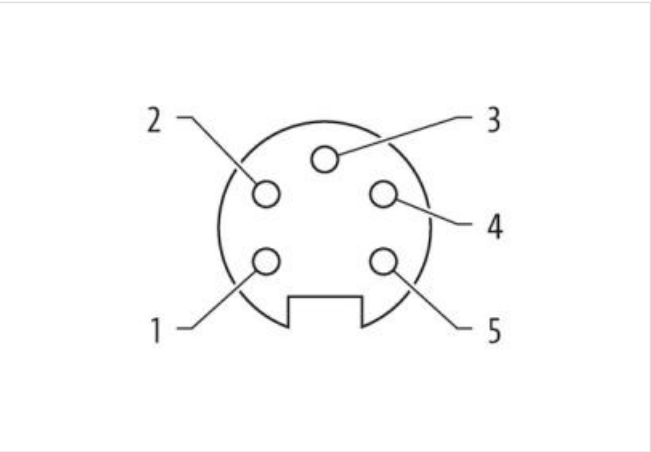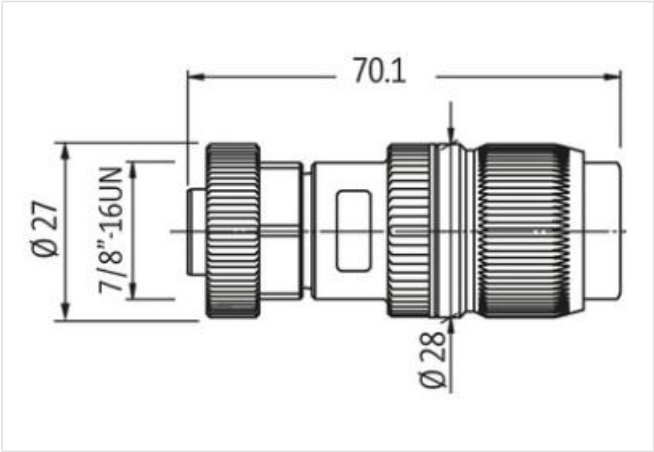

Product van afwijken van afbeelding

Commerciële gegevens	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC002635

Douane tarief nummer	85366990
GTIN	4048879111454
Verpakkingseenheid	1

Electrical data | Supply

Current operating per contact max.	10 A
Current phase - neutral	230 V
Current phase - phase	400 V

Installation

Connection cross section min.	0,75 mm ²
Connection cross section max.	1,5 mm ²
Single wire diameter min.	0,15 mm

Installation | Connection

Wire insulation diameter max.	2,8 mm
Tightening torque	1,5 Nm
Mounting set	7/8"

Installation | Pin assignment

Coding	A
No. of poles	5

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65, IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	4 kV
Material group (IEC 60664-1)	I

Mechanical data | Material data

Material housing	PA
Locking material	Stainless steel 1.4305 (V2A)

Mechanical data | Mounting data

Mounting method	inserted, screwed, Shaking protection
Clamping range min.	6,8 mm
Clamping range max.	9,5 mm

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	85 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.