





M12 male 0° with cable F&B Pro

CUBE67

F&B Pro  
Cube67  
Terminating resistor  
Male  
M12, 6-pole  
A-coded  
Stainless steel 1.4404 (V4A)  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

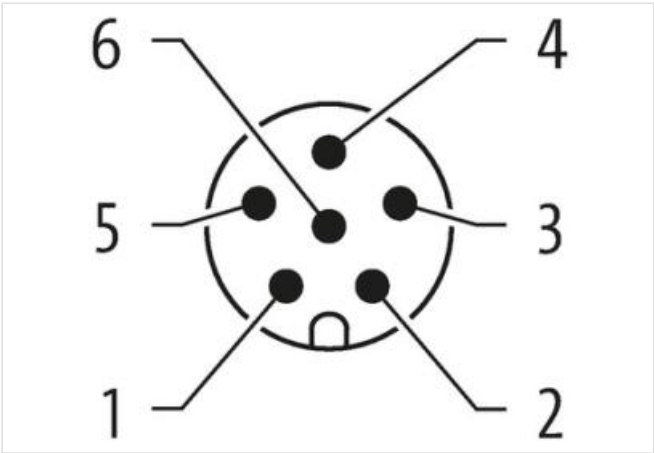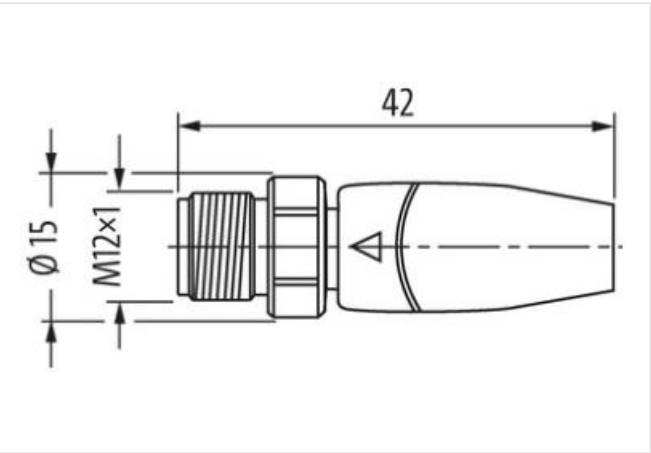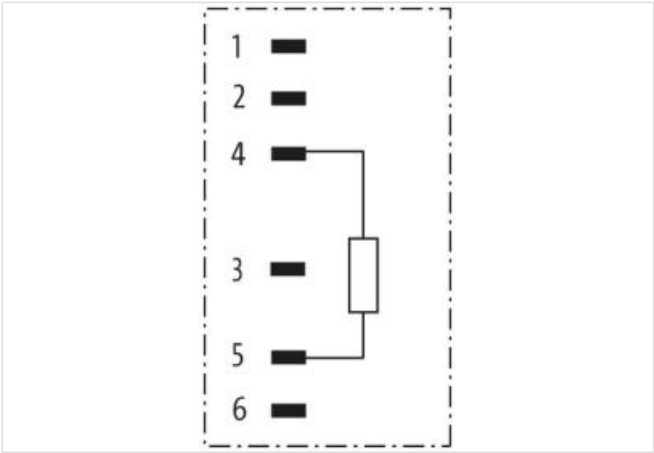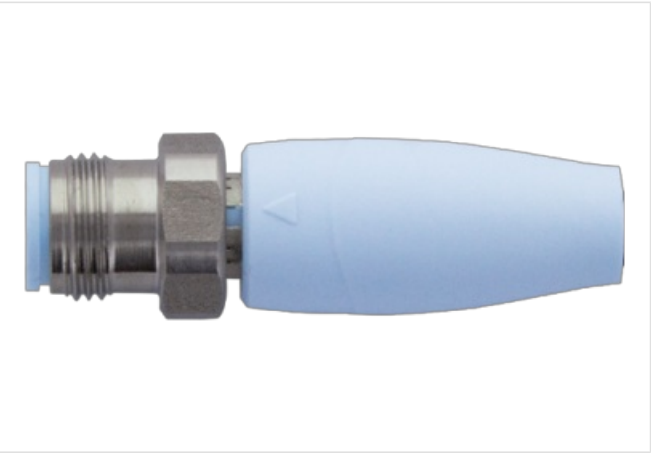

Product van afwijken van afbeelding

| Side 1                              |                   |
|-------------------------------------|-------------------|
| Family construction form            | M12               |
| Coding                              | A                 |
| Material contact                    | Copper alloy      |
| No. of poles                        | 6                 |
| Width across flats                  | SW14              |
| Degree of protection (EN IEC 60529) | IP65, IP68, IP69K |

**Commerciële gegevens**

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 19070403      |
| ECLASS-6.1           | 19070403      |
| ECLASS-7.0           | 19070403      |
| ECLASS-8.0           | 19070403      |
| ECLASS-9.0           | 19070403      |
| ECLASS-10.1          | 19070403      |
| ECLASS-11.1          | 19070403      |
| ECLASS-12.0          | 19070403      |
| ETIM-5.0             | EC001855      |
| Douane tarief nummer | 85332100      |
| GTIN                 | 4048879772464 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC max.          | 30 V |
| Current operating per contact max. | 4 A  |

**Diagnostics**

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

**Installation | Connection**

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                  |                              |
|------------------|------------------------------|
| Coating contact  | gold plated                  |
| Material housing | PP                           |
| Locking material | Stainless steel 1.4404 (V4A) |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
| Operating temperature max. | 105 °C |