


B6 Surface mounted h., low profile, IP65

Single locking lever m.,2 entries M20

B6  
Surface mounted housing (low)  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link naar het product

Afbeelding

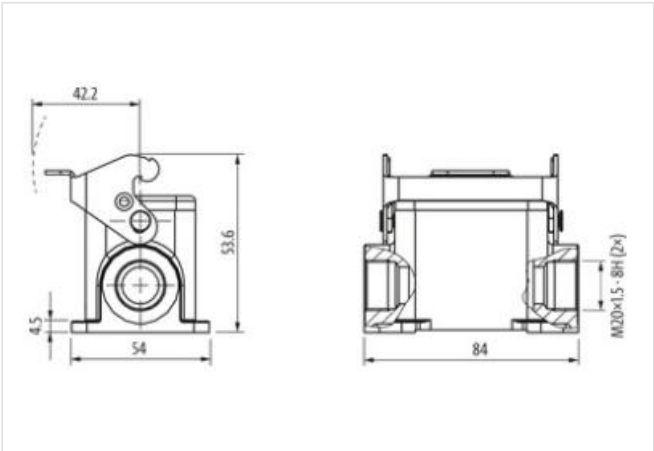

Product van afwijken van afbeelding

| Commerciële gegevens                   |                                         |
|----------------------------------------|-----------------------------------------|
| ECLASS-6.0                             | 27279221                                |
| ECLASS-6.1                             | 27261203                                |
| ECLASS-7.0                             | 27440202                                |
| ECLASS-8.0                             | 27440202                                |
| ECLASS-9.0                             | 27440202                                |
| ECLASS-10.1                            | 27440202                                |
| ECLASS-11.1                            | 27440202                                |
| ECLASS-12.0                            | 27440202                                |
| ETIM-5.0                               | EC000437                                |
| Douane tarief nummer                   | 85389099                                |
| GTIN                                   | 4048879696234                           |
| Verpakkingseenheid                     | 1                                       |
| Installation                           |                                         |
| Cable outlet                           | double-sided                            |
| Installation   Connection              |                                         |
| Mounting set                           | M20                                     |
| Mating cycles min.                     | 500                                     |
| Device protection   Electrical         |                                         |
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |
| Mechanical data                        |                                         |
| Housing type                           | Surface mounted housing                 |
| Mechanical data   Material data        |                                         |

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                 |     |
|-----------------|-----|
| Material gasket | NBR |
|-----------------|-----|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |    |
|------|----|
| Size | B6 |
|------|----|

|                    |                      |
|--------------------|----------------------|
| Locking techniques | Single locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|