


B16 Surface mounted h., high profile, IP65

Single locking lever m.,2 entries M32, p-cover

B16
Surface mounted housing (high)
Single locking lever
IP65
Technical data will be only guaranteed with Murrelektronik components.

Link naar het product

Afbeelding

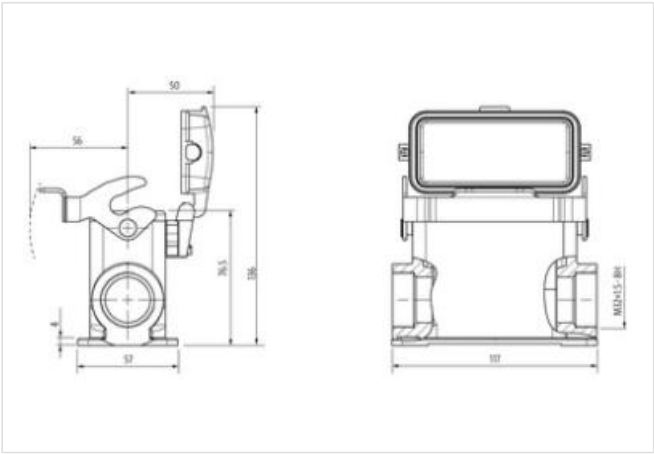

Product van afwijken van afbeelding

Commerciële gegevens	
ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
Douane tarief nummer	85389099
GTIN	4048879646574
Verpakkingseenheid	1
Installation	
Cable outlet	double-sided
Installation Connection	
Mounting set	M32
Mating cycles min.	500
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked, with screw connection
Mechanical data	
Housing type	Surface mounted housing
Mechanical data Material data	

Coating housing	powder-coated
-----------------	---------------

Coating locking	verzinkt
-----------------	----------

Material gasket	NBR
-----------------	-----

Material housing	Aluminum die casting
------------------	----------------------

Material protective cover	Plastic
---------------------------	---------

Locking material	Steel
------------------	-------

Mechanical data | Mounting data

Size	B16
------	-----

Height	76,5 mm
--------	---------

Width	57 mm
-------	-------

Depth	117 mm
-------	--------

Looking techniques	Single locking lever
--------------------	----------------------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	100 °C
----------------------------	--------

Climatic category (EN IEC 60068-1)	40/100/21
------------------------------------	-----------