


B10 Hood, high profile, IP65

Single locking lever, top entry M25

B10  
Hood (high)  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link naar het product

Afbeelding

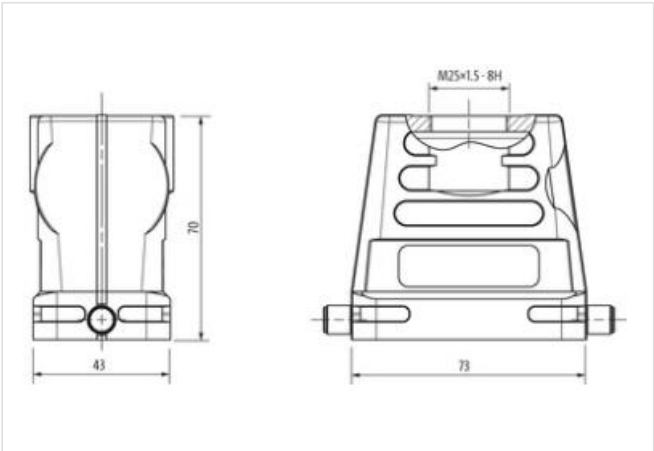

Product van afwijken van afbeelding

Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143424      |
| ECLASS-6.1           | 27261203      |
| ECLASS-7.0           | 27440202      |
| ECLASS-8.0           | 27440202      |
| ECLASS-9.0           | 27440202      |
| ECLASS-10.1          | 27440202      |
| ECLASS-11.1          | 27440202      |
| ECLASS-12.0          | 27440202      |
| ETIM-5.0             | EC000437      |
| Douane tarief nummer | 85389099      |
| GTIN                 | 4048879646406 |
| Verpakkingseenheid   | 1             |

Installation

|              |          |
|--------------|----------|
| Cable outlet | straight |
|--------------|----------|

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M25 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

|              |      |
|--------------|------|
| Housing type | Hood |
|--------------|------|

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B10 |
|------|-----|

|        |       |
|--------|-------|
| Height | 70 mm |
|--------|-------|

|       |       |
|-------|-------|
| Width | 43 mm |
|-------|-------|

|       |       |
|-------|-------|
| Depth | 73 mm |
|-------|-------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Single locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|