


Male module, 17-pole, crimp t.

160 V, 10 A

Male  
17-pole  
Crimp  
Technical data will be only guaranteed with Murrelektronik components.

Link naar het product

Afbeelding

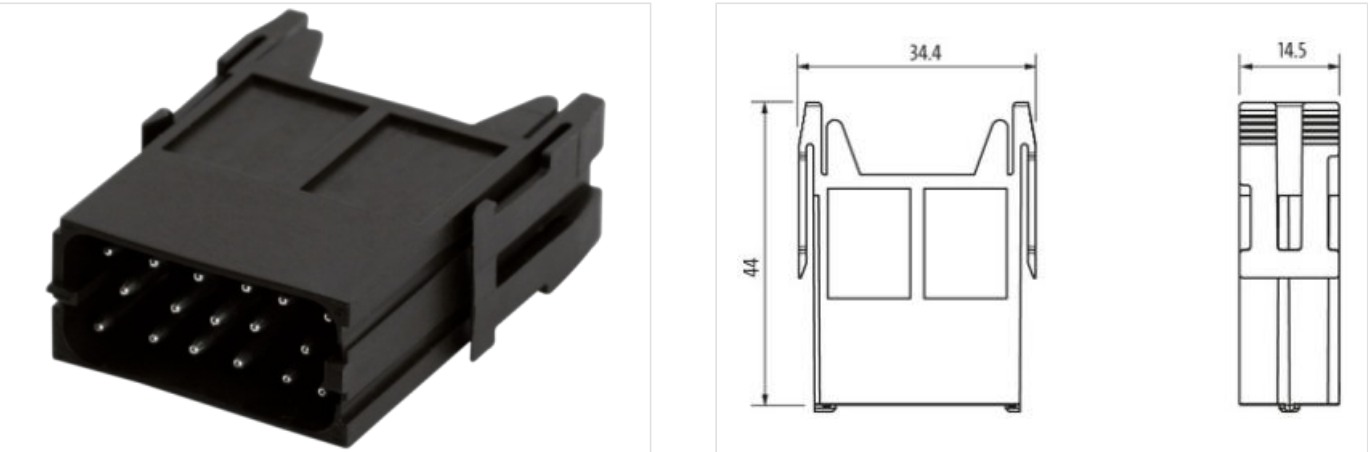

Product van afwijken van afbeelding

Commerciële gegevens

|                      |               |
|----------------------|---------------|
| ECLASS-6.0           | 27143424      |
| ECLASS-6.1           | 27261204      |
| ECLASS-7.0           | 27440204      |
| ECLASS-8.0           | 27440204      |
| ECLASS-9.0           | 27440217      |
| ECLASS-10.1          | 27440217      |
| ECLASS-11.1          | 27440217      |
| ECLASS-12.0          | 27440217      |
| ETIM-5.0             | EC000438      |
| Douane tarief nummer | 85389099      |
| GTIN                 | 4048879641579 |
| Verpakkingseenheid   | 5             |

Electrical data | Supply

|                      |       |
|----------------------|-------|
| Operating voltage AC | 160 V |
| Operating voltage DC | 160 V |
| Operating current    | 10 A  |

Installation

|                               |          |
|-------------------------------|----------|
| Connection cross section min. | 0,14 mm² |
| Connection cross section max. | 2,5 mm²  |
| AWG number min.               | 26       |
| AWG number max.               | 13       |

Installation | Connection

|                               |        |
|-------------------------------|--------|
| Wire insulation diameter min. | 3,7 mm |
| Connection                    | Crimp  |

|        |      |
|--------|------|
| Gender | male |
|--------|------|

|                    |     |
|--------------------|-----|
| Mating cycles min. | 500 |
|--------------------|-----|

**Installation | Pin assignment**

|              |    |
|--------------|----|
| No. of poles | 17 |
|--------------|----|

**Device protection | Electrical**

|                  |   |
|------------------|---|
| Pollution Degree | 3 |
|------------------|---|

|                     |        |
|---------------------|--------|
| Rated surge voltage | 2,5 kV |
|---------------------|--------|

|                            |        |
|----------------------------|--------|
| Insulation resistance min. | 100 MΩ |
|----------------------------|--------|

|                                   |   |
|-----------------------------------|---|
| Overvoltage category (EN 60664-1) | I |
|-----------------------------------|---|

|                                   |     |
|-----------------------------------|-----|
| Overvoltage category (EN 60950-1) | III |
|-----------------------------------|-----|

**Mechanical data**

|                             |      |
|-----------------------------|------|
| Holding force contacts min. | 70 N |
|-----------------------------|------|

|                            |       |
|----------------------------|-------|
| Holding force modules min. | 150 N |
|----------------------------|-------|

|                    |       |
|--------------------|-------|
| Pulling force max. | 140 N |
|--------------------|-------|

**Mechanical data | Material data**

|                 |                       |
|-----------------|-----------------------|
| Coating contact | versilbert, vergoldet |
|-----------------|-----------------------|

|                             |     |
|-----------------------------|-----|
| Combustibility class (UL94) | V-0 |
|-----------------------------|-----|

|                  |    |
|------------------|----|
| Material housing | PA |
|------------------|----|

|                  |       |
|------------------|-------|
| Material contact | Brass |
|------------------|-------|

**Mechanical data | Mounting data**

|                        |   |
|------------------------|---|
| Number of module slots | 1 |
|------------------------|---|

|        |       |
|--------|-------|
| Height | 44 mm |
|--------|-------|

|       |         |
|-------|---------|
| Width | 14,5 mm |
|-------|---------|

|       |         |
|-------|---------|
| Depth | 34,4 mm |
|-------|---------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 125 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/125/10 |
|------------------------------------|-----------|