



EXACT8, 4XM8, 3 POLE BASIC HOUSING

Without homerun-cable


4-way, 3-pole  
Inline face or side mounting  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

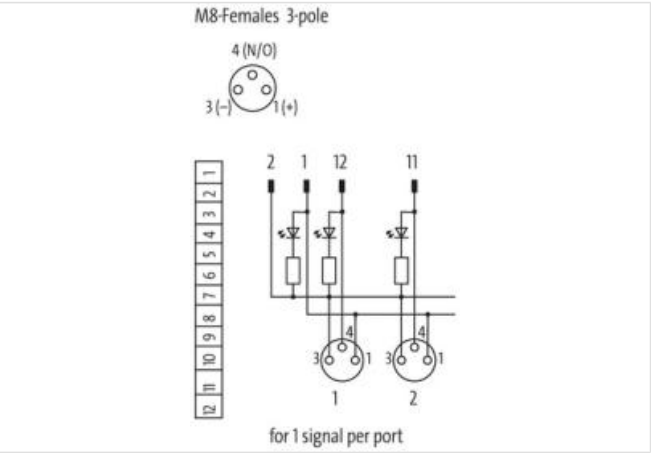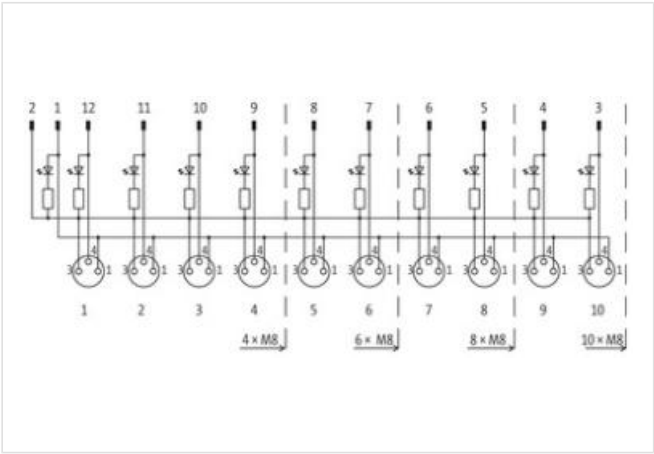

Product van afwijken van afbeelding

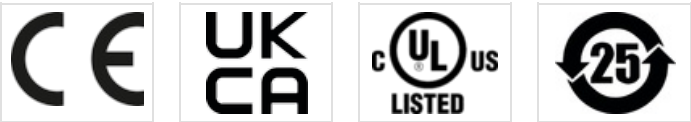

| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27279219 |
| ECLASS-6.1           | 27279219 |
| ECLASS-7.0           | 27279219 |
| ECLASS-8.0           | 27279219 |
| ECLASS-9.0           | 27440108 |

|                      |               |
|----------------------|---------------|
| ECLASS-10.1          | 27440111      |
| ECLASS-11.1          | 27440111      |
| ECLASS-12.0          | 27440111      |
| ETIM-5.0             | EC002585      |
| Douane tarief nummer | 85369010      |
| GTIN                 | 4048879056618 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 2 A  |
| Total current max.                 | 8 A  |

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -20 °C                     |
| Operating temperature max.             | 70 °C                      |
| Additional condition temperature range | depending on cable quality |

**Connection type 2**

|                          |        |
|--------------------------|--------|
| Family construction form | Cap    |
| No. of poles             | 12     |
| Family construction form | M8     |
| Gender                   | female |
| Color contact carrier    | black  |
| Coding                   | A      |
| No. of poles             | 3      |
| PIN 1                    | +      |
| PIN 3                    | -      |
| PIN 4                    | S      |