
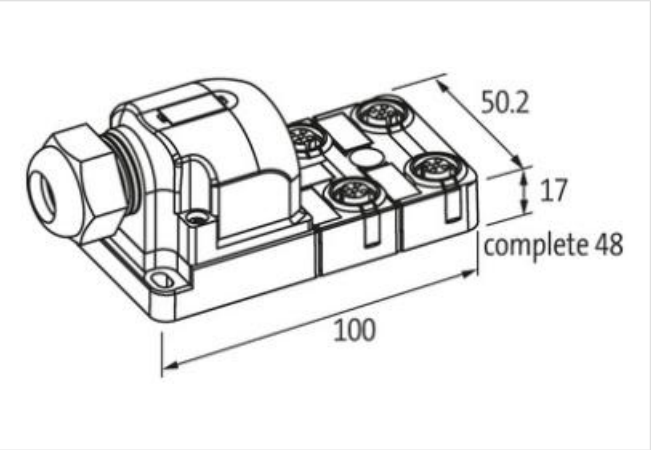


EXACT12, 4XM12, 5-POLE, CAP, PLUG. SCREW-TERM


4-way, 5-pole  
Form PNP  
Screw plug-in terminals  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

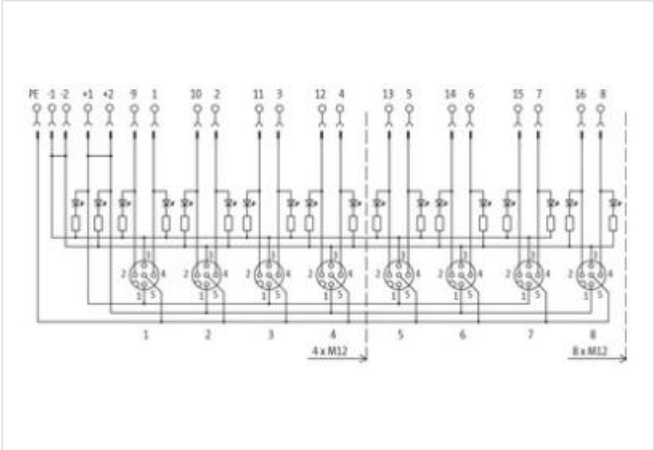

Product van afwijken van afbeelding

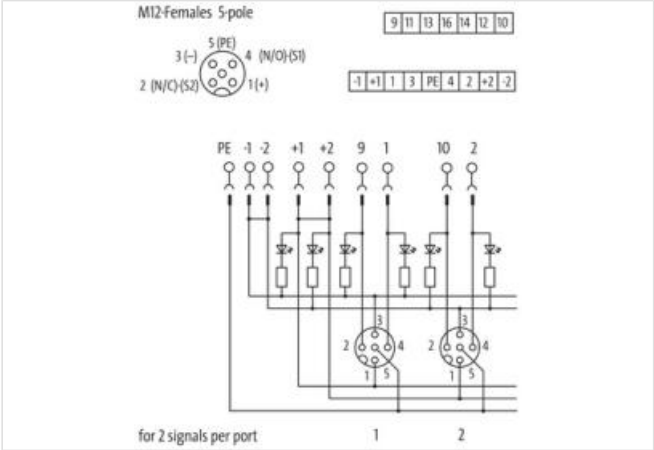

| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27279219 |
| ECLASS-6.1           | 27279219 |
| ECLASS-7.0           | 27279219 |
| ECLASS-8.0           | 27279219 |
| ECLASS-9.0           | 27440108 |
| ECLASS-10.1          | 27440111 |

|                                                 |                         |
|-------------------------------------------------|-------------------------|
| ECLASS-11.1                                     | 27440111                |
| ECLASS-12.0                                     | 27440111                |
| ETIM-5.0                                        | EC002585                |
| Douane tarief nummer                            | 85369010                |
| GTIN                                            | 4048879055635           |
| Verpakkingseenheid                              | 1                       |
| <b>Electrical data   Supply</b>                 |                         |
| Operating voltage DC                            | 24 V                    |
| Current operating per contact max.              | 4 A                     |
| Total current max.                              | 8 A                     |
| <b>Installation</b>                             |                         |
| Connection cross section max.                   | 1,5 mm <sup>2</sup>     |
| AWG number max.                                 | 16                      |
| <b>Installation   Connection</b>                |                         |
| Connection                                      | Screw plug-in terminals |
| <b>Device protection   Electrical</b>           |                         |
| Degree of protection (EN IEC 60529)             | IP65, IP67              |
| <b>Device protection   Media</b>                |                         |
| Flame resistance                                | flame retardant         |
| <b>Mechanical data   Material data</b>          |                         |
| Material housing                                | Plastic                 |
| <b>Environmental characteristics   Climatic</b> |                         |
| Operating temperature min.                      | -20 °C                  |
| Operating temperature max.                      | 70 °C                   |
| <b>Connection type 2</b>                        |                         |
| Family construction form                        | Cap                     |
| No. of poles                                    | 21                      |
| Family construction form                        | M12                     |
| Gender                                          | female                  |
| Color contact carrier                           | black                   |
| Coding                                          | A                       |
| No. of poles                                    | 5                       |
| PIN 1                                           | +                       |
| PIN 2                                           | NC S 2                  |
| PIN 3                                           | -                       |
| PIN 4                                           | NO S 1                  |
| PIN 5                                           | PE                      |