



CAP. WITH SCREW PLUG TERMINALS 21 POLE

Use with MVP12 / Exact12 UNIVERSAL

Cap for 4-way distribution box, UNIVERSAL, 5-pole
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

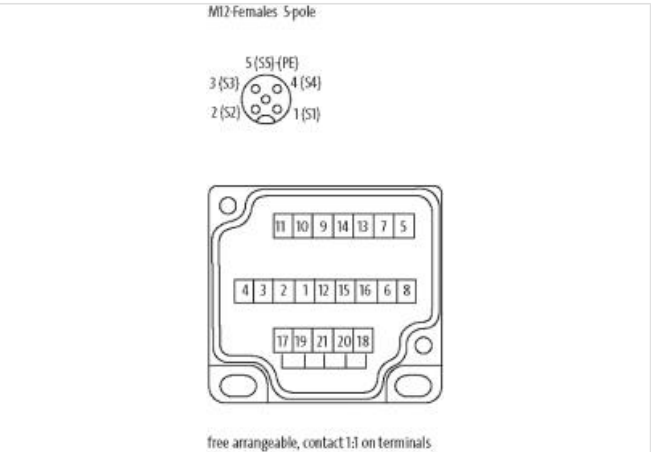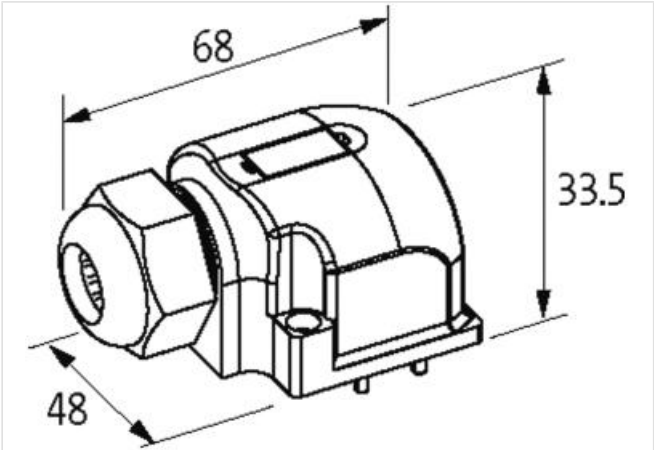

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27143423
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ECLASS-10.1	27440111
ECLASS-11.1	27440111

ECLASS-12.0	27440111
-------------	----------

ETIM-5.0	EC002585
----------	----------

Douane tarief nummer	85366990
----------------------	----------

GTIN	4048879378536
------	---------------

Verpakkingseenheid	1
--------------------	---

Electrical data | Supply

Total current max.	8 A
--------------------	-----

Installation

Connection cross section max.	1,5 mm ²
-------------------------------	---------------------

AWG number max.	16
-----------------	----

Installation | Connection

Connection	Screw plug-in terminals
------------	-------------------------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Material housing	Plastic
------------------	---------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
----------------------------	--------

Operating temperature max.	80 °C
----------------------------	-------

Connection type 2

Family construction form	Cap
--------------------------	-----

No. of poles	21
--------------	----

Family construction form	M12
--------------------------	-----

Gender	female
--------	--------

Color contact carrier	black
-----------------------	-------

Coding	A
--------	---

No. of poles	5
--------------	---