



EXACT8, 6XM8, 3 POLE

Connector M12 8-pole


6-way, 3-pole  
M12 (8-pole)  
Inline face or side mounting  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

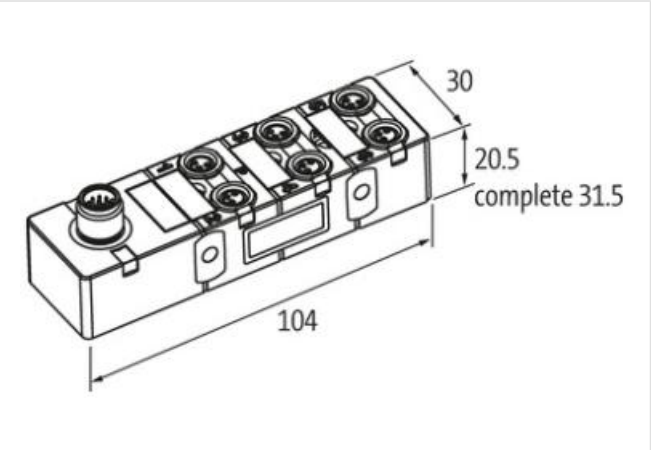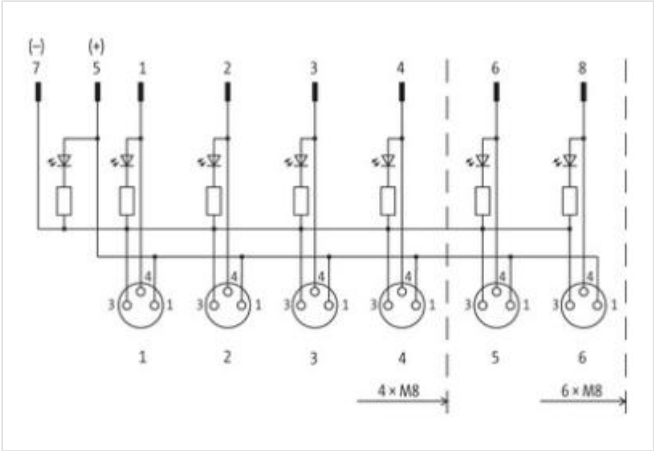

Product van afwijken van afbeelding

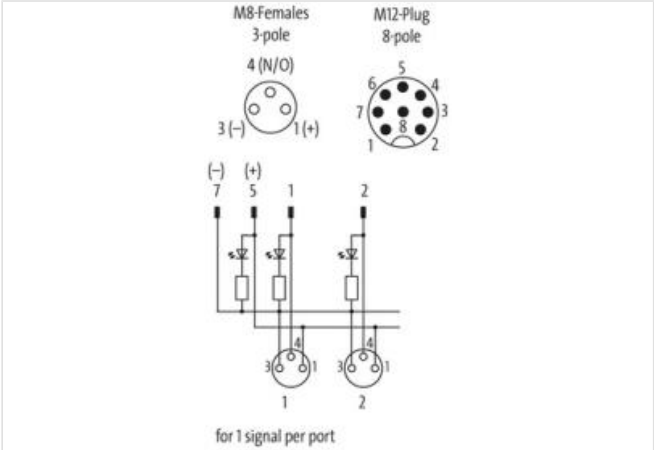

| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27143423 |
| ECLASS-6.1           | 27279219 |
| ECLASS-7.0           | 27279219 |
| ECLASS-8.0           | 27279219 |

|                      |               |
|----------------------|---------------|
| ECLASS-9.0           | 27440111      |
| ECLASS-10.1          | 27440111      |
| ECLASS-11.1          | 27440111      |
| ECLASS-12.0          | 27440111      |
| ETIM-5.0             | EC002585      |
| Douane tarief nummer | 85369010      |
| GTIN                 | 4048879055017 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 2 A  |

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -20 °C                     |
| Operating temperature max.             | 70 °C                      |
| Additional condition temperature range | depending on cable quality |

**Connection type 2**

|                          |         |
|--------------------------|---------|
| Family construction form | M12     |
| Gender                   | male    |
| Color contact carrier    | black   |
| Coding                   | A       |
| No. of poles             | 8       |
| PIN 1                    | S 1     |
| PIN 2                    | S 2     |
| PIN 3                    | S 3     |
| PIN 4                    | S 4     |
| PIN 5                    | 24 V DC |
| PIN 6                    | S 5     |
| PIN 7                    | 0 V     |
| PIN 8                    | S 6     |
| Family construction form | M8      |
| Gender                   | female  |
| Color contact carrier    | black   |
| Coding                   | A       |
| No. of poles             | 3       |
| PIN 1                    | 24 V DC |
| PIN 3                    | -       |
| PIN 4                    | S       |