




EXACT12 SAFETY, PRE-WIRED CAP AND ATT. TERMINALS

3m PUR 20x0.34+3x0.75mm²

for 8-way distribution boxes, 5-, 4-pole  
Homerun cable with spring clamp terminals  
11/12-pole  
Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link naar het product

Afbeelding

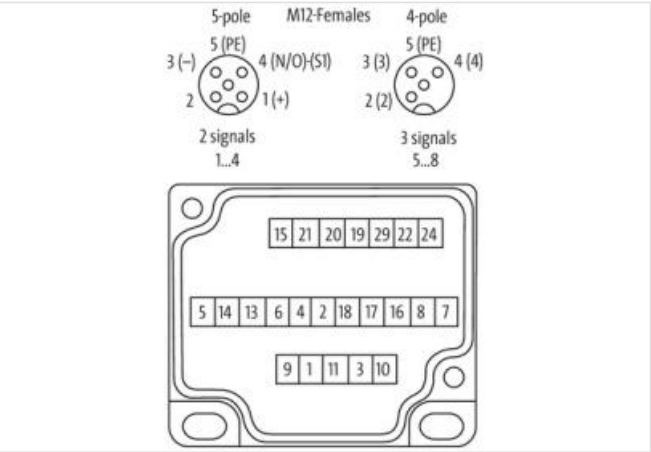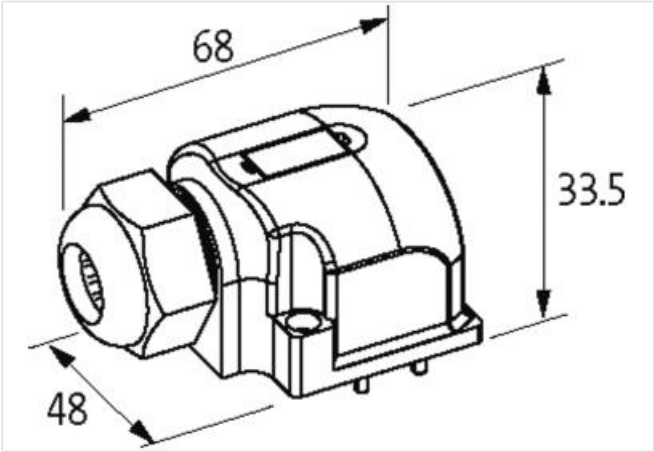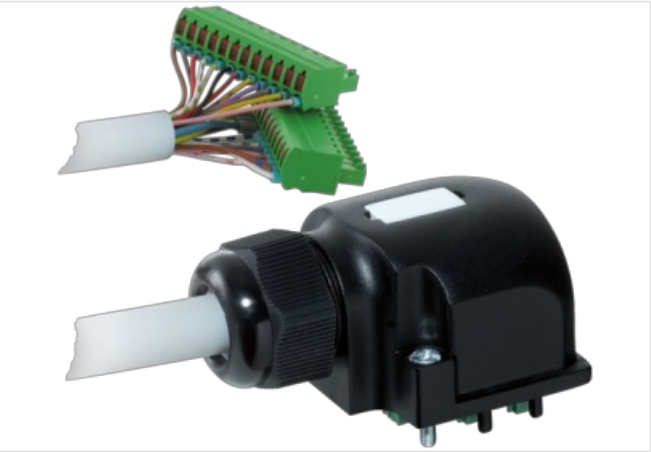

Product van afwijken van afbeelding



| Commerciële gegevens |          |
|----------------------|----------|
| ECLASS-6.0           | 27143423 |
| ECLASS-6.1           | 27279219 |
| ECLASS-7.0           | 27279219 |

|                      |               |
|----------------------|---------------|
| ECLASS-8.0           | 27279219      |
| ECLASS-9.0           | 27440108      |
| ECLASS-10.1          | 27440108      |
| ECLASS-11.1          | 27440108      |
| ECLASS-12.0          | 27440108      |
| ETIM-5.0             | EC002585      |
| Douane tarief nummer | 85444290      |
| GTIN                 | 4048879315630 |
| Verpakkingseenheid   | 1             |

**Electrical data | Supply**

|                    |     |
|--------------------|-----|
| Total current max. | 8 A |
|--------------------|-----|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -20 °C                     |
| Operating temperature max.             | 80 °C                      |
| Additional condition temperature range | depending on cable quality |

**Installation | Cable**

|                                                 |                                                                                                                                                                                                                                      |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cable identification                            | 407                                                                                                                                                                                                                                  |
| Cable Type                                      | 2                                                                                                                                                                                                                                    |
| Jacket Color                                    | gray                                                                                                                                                                                                                                 |
| Type of Certificate                             | cURus                                                                                                                                                                                                                                |
| Amount stranding                                | 1                                                                                                                                                                                                                                    |
| Stranding                                       | 9 wires around Core filler twisted                                                                                                                                                                                                   |
| Amount stranding (type 2)                       | 1                                                                                                                                                                                                                                    |
| Stranding (type 2)                              | 14 wires around Stranding combination twisted                                                                                                                                                                                        |
| Banding                                         | Fleece                                                                                                                                                                                                                               |
| Filler                                          | yes                                                                                                                                                                                                                                  |
| wire arrangement                                | green, red-blue, white, gray-pink, yellow-white, gray, brown-green, yellow, green-white, (brown, blue, green-yellow, brown-blue, blue-white, brown-pink, white-pink, violet, brown-gray, black, gray-white, red, brown-yellow, pink) |
| Cable weight                                    | 165,44 g/m                                                                                                                                                                                                                           |
| Material jacket                                 | PUR                                                                                                                                                                                                                                  |
| Shore hardness jacket                           | 92 ± 5 Shore A                                                                                                                                                                                                                       |
| Freedom from ingredients (jacket)               | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free                                                                                                                                                                       |
| Outer-diameter (jacket)                         | 10,2 mm                                                                                                                                                                                                                              |
| Tolerance outer diameter (sheath)               | ± 5 %                                                                                                                                                                                                                                |
| Material wire insulation                        | PP                                                                                                                                                                                                                                   |
| Amount wires                                    | 20                                                                                                                                                                                                                                   |
| Outer diameter insulation                       | 1,27 mm                                                                                                                                                                                                                              |
| Outer diameter tolerance core insulation        | ± 5 %                                                                                                                                                                                                                                |
| Shore hardness wire insulation                  | 60 ± 5 Shore D                                                                                                                                                                                                                       |
| Ingredient freeness wire insulation             | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free                                                                                                                                                                       |
| Amount strands (wire)                           | 42                                                                                                                                                                                                                                   |
| Diameter of single wires                        | 0,1 mm                                                                                                                                                                                                                               |
| Conductor crosssection (wire)                   | 0,34 mm²                                                                                                                                                                                                                             |
| Material conductor wire                         | Stranded copper wire, bare                                                                                                                                                                                                           |
| Conductor type (wire)                           | strand class 6                                                                                                                                                                                                                       |
| Material wire insulation (Data)                 | PP                                                                                                                                                                                                                                   |
| Outer diameter wire insulation (Data)           | 1,83 mm                                                                                                                                                                                                                              |
| Tolerance outer diameter wire insulation (data) | ± 5 %                                                                                                                                                                                                                                |

|                                                   |                                                                |
|---------------------------------------------------|----------------------------------------------------------------|
| Shore hardness wire insulation (Data)             | 60 ± 5 Shore D                                                 |
| Ingredient freeness wire insulation (Data)        | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Amount wires (Data)                               | 3                                                              |
| Amount strands wire (Data)                        | 96                                                             |
| Diameter of single wires (Data)                   | 0,1 mm                                                         |
| Conductor crosssection wire (Data)                | 0,75 mm <sup>2</sup>                                           |
| Material conductor wire (Data)                    | Stranded copper wire, bare                                     |
| Wire conductor type (Data)                        | strand class 6                                                 |
| Max. rated voltage (conductor - conductor)        | 300 V                                                          |
| Max. rated voltage (conductor - ground)           | 300 V                                                          |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                              |
| Current load capacity min. wire                   | 4 A                                                            |
| Current load capacity min. Wire (Data)            | 12 A                                                           |
| Electrical resistance line constant wire          | 53 Ω/km @ 20 °C                                                |
| Electrical resistance coating wire (Data)         | 26 Ω/km @ 20 °C                                                |
| AC withstand voltage (wire - wire)                | 3 kV @ 60 s                                                    |
| Power frequency withstand voltage (wire - jacket) | 3 kV @ 60 s                                                    |
| Min. operating temperature (static)               | -40 °C                                                         |
| Max. operating temperature (fixed)                | 80 °C                                                          |
| Operating temperature min. (dynamic)              | -5 °C                                                          |
| Operating temperature max. (dynamic)              | 80 °C                                                          |
| Flame resistance                                  | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2            |
| chemical resistance                               | Good, application-related testing                              |
| Gasoline resistance                               | Good, application-related testing                              |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing           |
| Bending radius (installation)                     | x Outer diameter                                               |
| Bending radius (fixed)                            | 5 x Outer diameter                                             |
| Bending radius (dynamic)                          | 10 x Outer diameter                                            |
| No. of bending cycles (C-track)                   | 5 Mio. @ 25 °C                                                 |
| Traversing distance (C-track)                     | 1,8 m @ 25 °C                                                  |
| Travel speed (C-track)                            | 2 m/s @ 25 °C                                                  |

**Connection type 3**

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| No. of poles             | 23             |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | yellow         |
| Coding                   | A              |
| No. of poles             | 4              |
| PIN 1                    | n.c.           |
| PIN 2                    | 2              |
| PIN 3                    | 3              |
| PIN 4                    | 4              |
| PIN 5                    | PE             |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 5              |
| PIN 1                    | +              |
| PIN 2                    | NC S 2         |
| PIN 3                    | -              |
| PIN 4                    | NO S 1         |

PIN 5

PE