

SAFETY WIRING SYSTEM

Distributor Box

8-way distribution box
without electrical feedback




Replaces identical product (Art.No. 27057)


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link naar het product](#)

Afbeelding

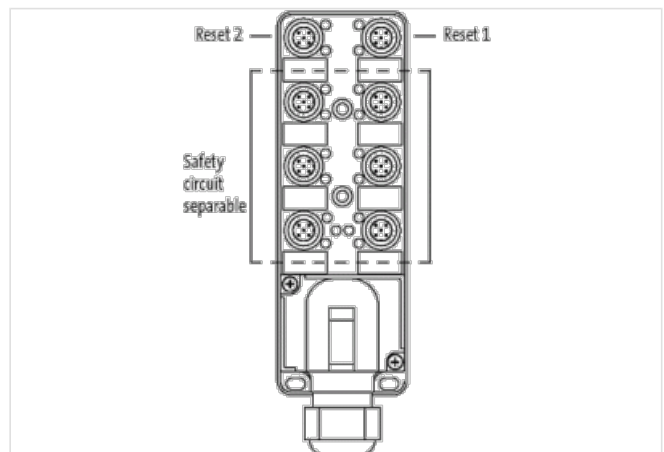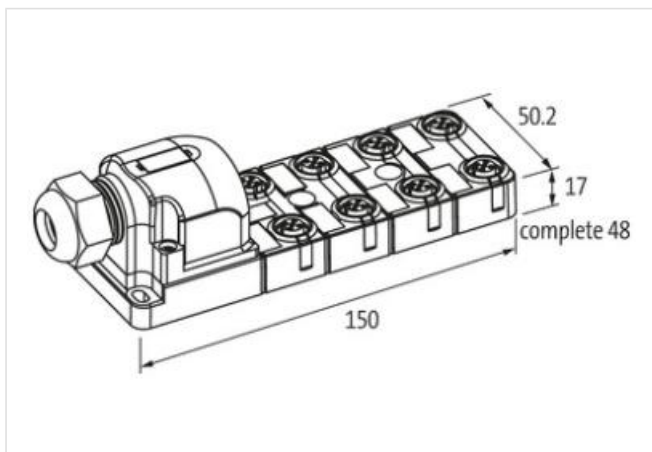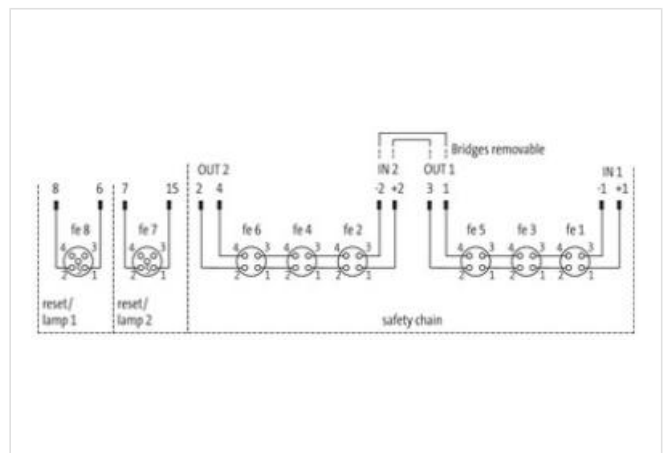

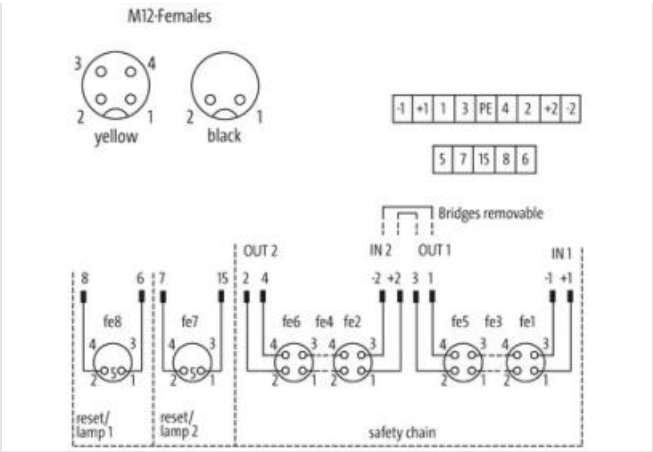

Product van afwijken van afbeelding



Commerciële gegevens	
ECLASS-6.0	27143423
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ECLASS-10.1	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ETIM-5.0	EC002585
Douane tarief nummer	85369010
GTIN	4048879353380
Verpakkingseenheid	1
Electrical data Supply	
Operating voltage DC	24 V
Operating current per chain max.	1 A
Current operating per port max.	1 A
Installation Connection	
Mounting set	M12 x 1
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Insulation resistance min.	1000 MΩ
Overvoltage category (EN 60664-1)	III
Mechanical data Mounting data	
Mounting method	Schraubgewinde
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	80 °C
Conformity	
Product standard	EN 61131-2
Connection type 3	

De informatie in dit datablad is met de grootst mogelijke zorg samengesteld.
Aansprakelijkheid beperkt tot grove nalatigheid voor de juistheid, volledigheid en actualiteit. Status: 2024-05-07
Murrelektronik B.V. | Takkebijsters 3 | 4817 BL Breda | Fon 085-22 20 282 | Fax 085-22 20 283 | shop@murrelektronik.nl | shop.murrelektronik.nl

Family construction form	Cap
No. of poles	14
Family construction form	M12
Gender	female
Color contact carrier	yellow
Coding	A
No. of poles	5
PIN 1	11
PIN 2	12
PIN 3	21
PIN 4	22
PIN 5	n.c.
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	13
PIN 2	14
PIN 3	n.c.
PIN 4	n.c.
PIN 5	n.c.